

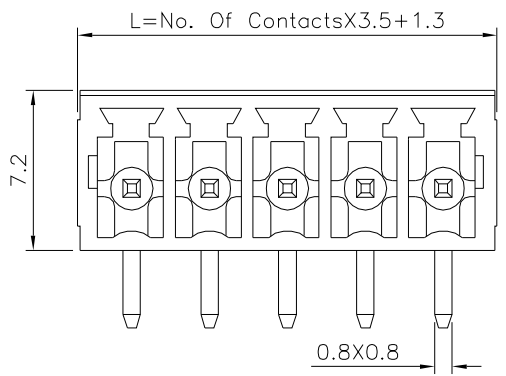


Recommended P.C.B. Layout

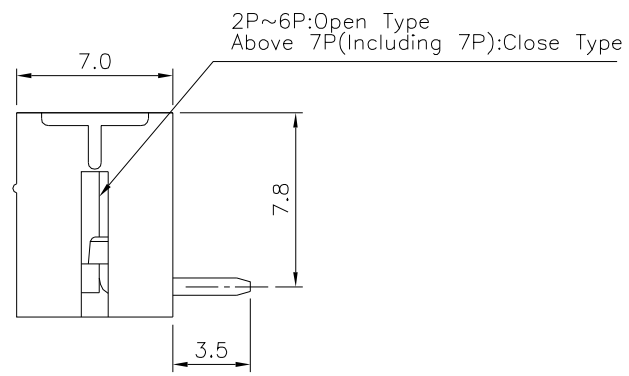

Length(L)	Tolerances
0~30	±0.30
30~60	±0.40
60~120	±0.50
120~220	±0.60

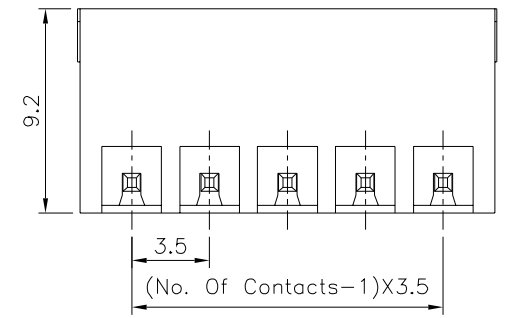

SPECIFICATION

Current Rating:12A/Way Max.
Voltage Rating:300V AC
Withstanding Voltage:1600V AC For 1 Minute
Operation Temperature:-40°C~+105°C
Insulator:Polyamide(UL94V-0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 23034		APPROVED BY Jason Wu		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.40 .XX ±0.30 X° ±1°	
		CHECKED BY Leo Han			
		DRAWING BY Michelle Lee			
SCALE	NONE	REV.	B0	UNIT mm	

NO.	REV.	REVISIONS	CHK	DATE
△0	B0	Modify Data	HZF	03/25/2026