


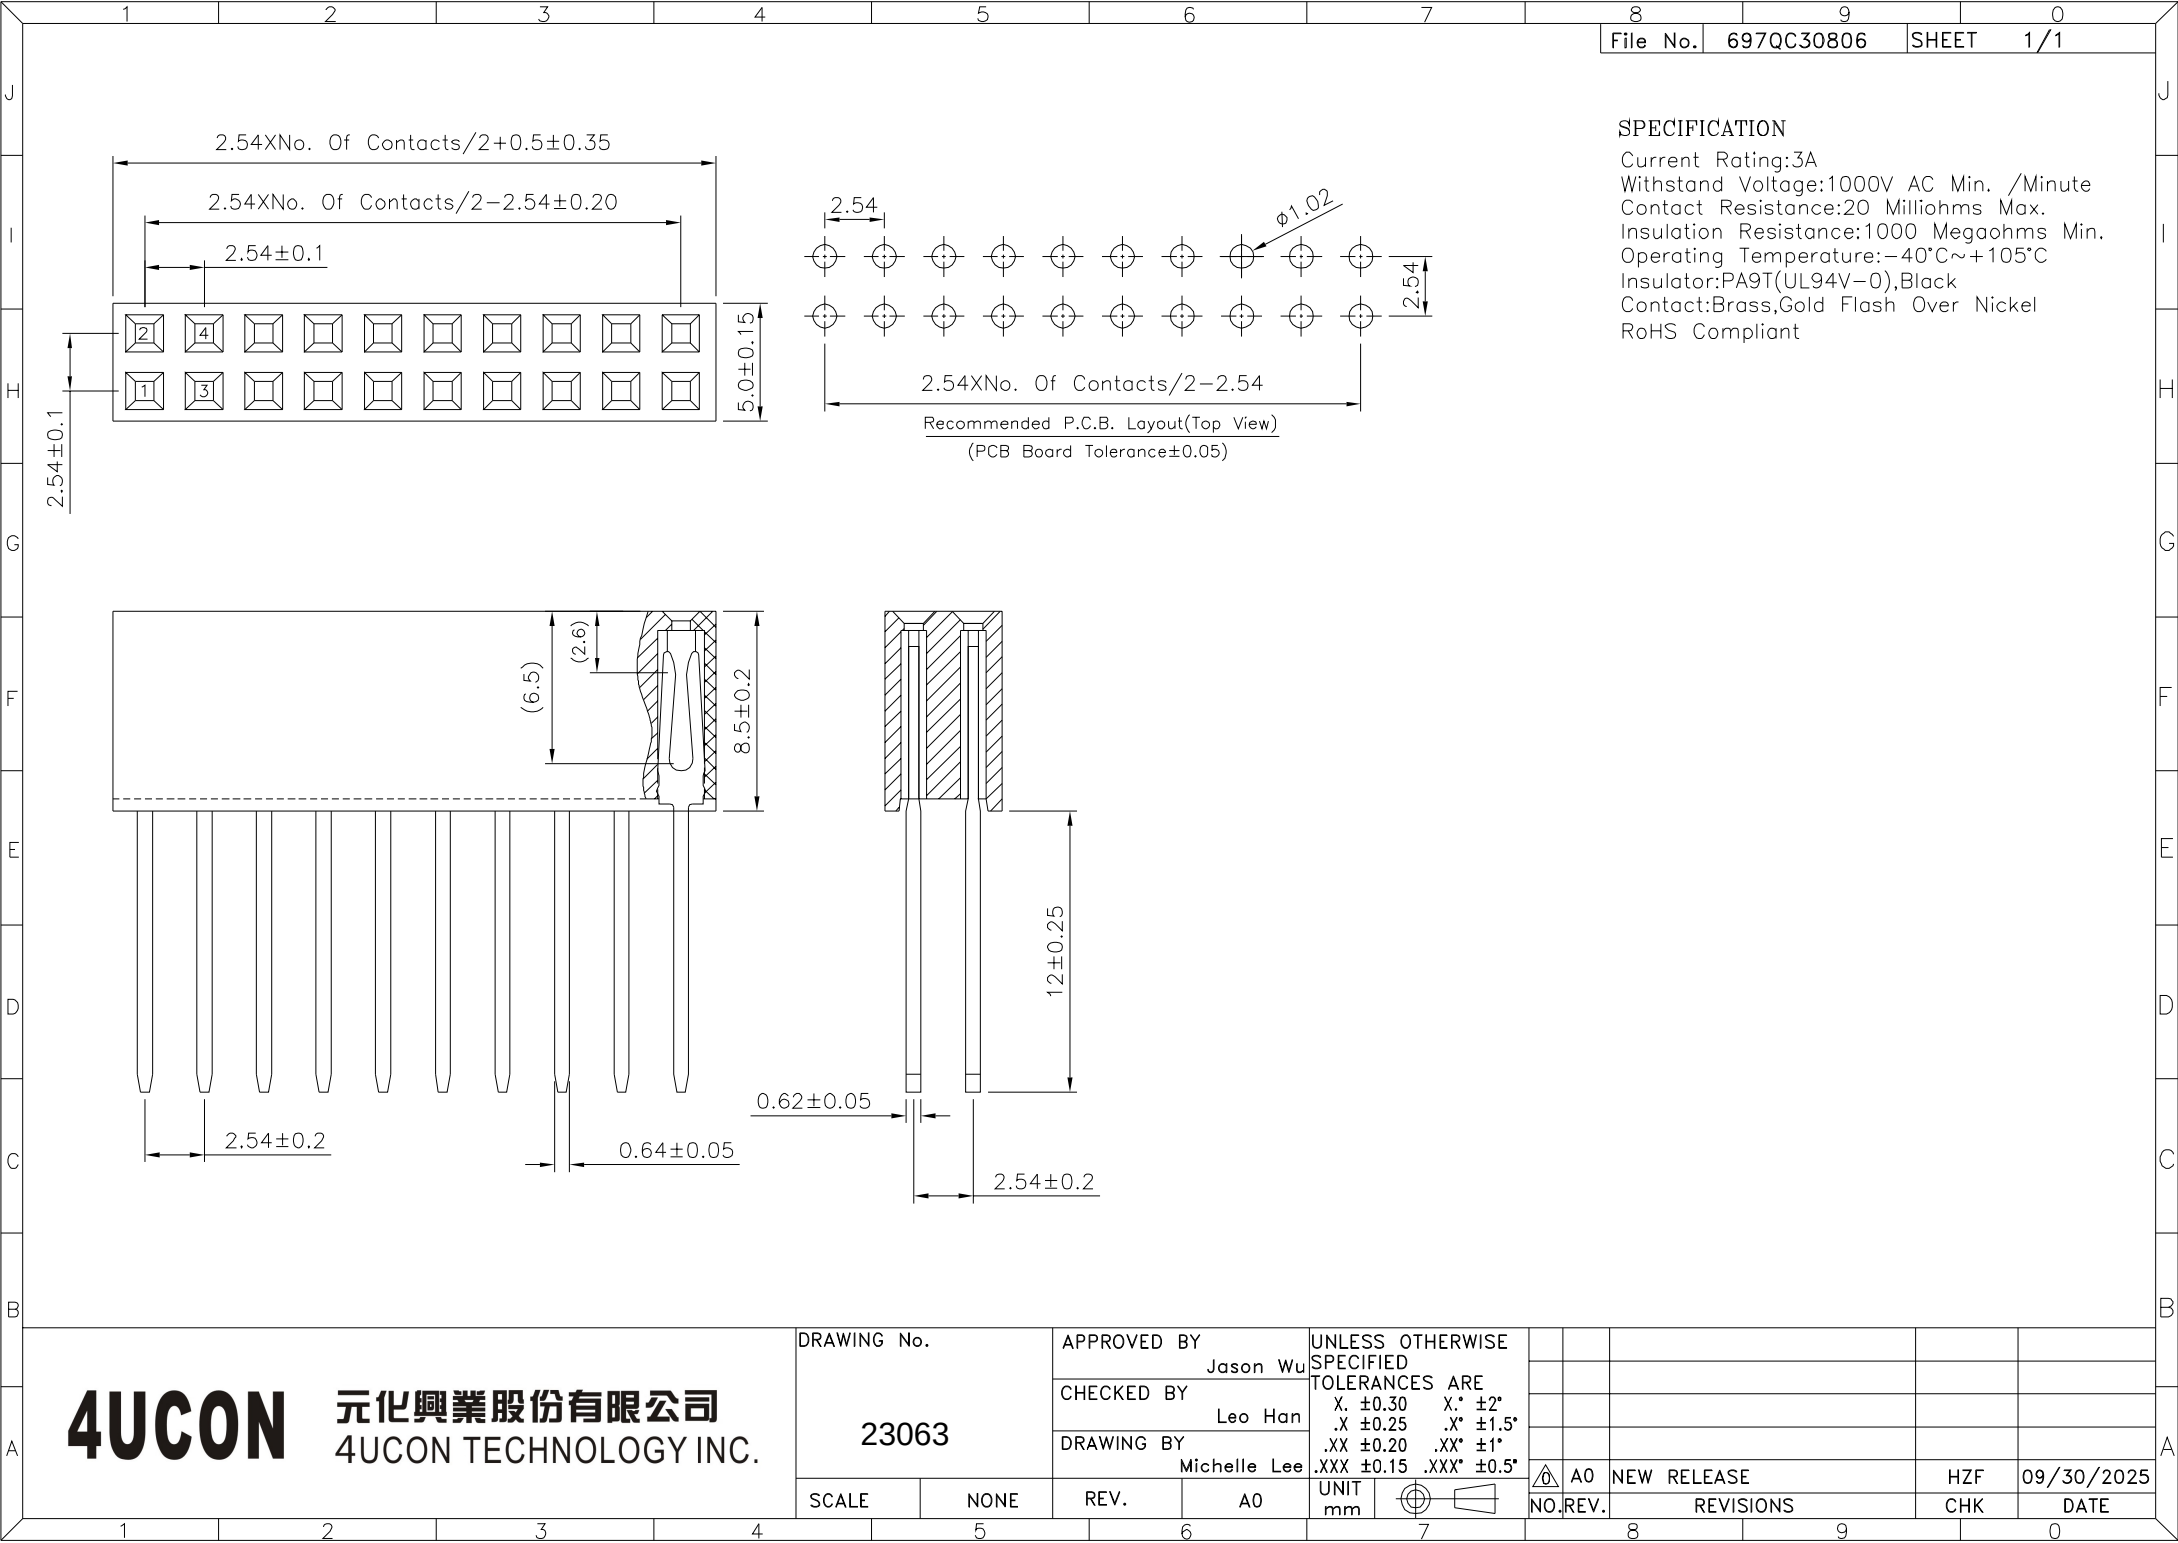

SPECIFICATION
Current Rating:3A
Withstand Voltage:1000V AC Min. /Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 23063		APPROVED BY Jason Wu		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X. ± 0.30 .X.* $\pm 2^\circ$.X ± 0.25 .X.* $\pm 1.5^\circ$.XX ± 0.20 .XX* $\pm 1^\circ$.XXX ± 0.15 .XXX* $\pm 0.5^\circ$						
		CHECKED BY Leo Han								
		DRAWING BY Michelle Lee								
SCALE	NONE	REV.	A0	UNIT mm			A0	NEW RELEASE	HZF	09/30/2025
	5		6		7		NO. REV.	REVISIONS	CHK	DATE