

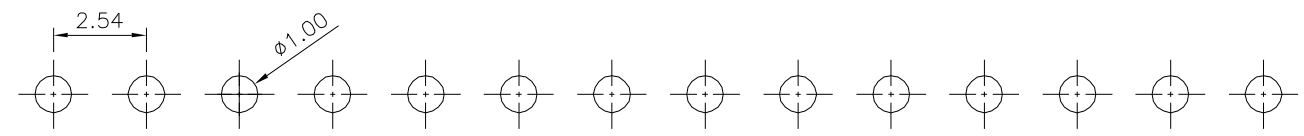



**△ SPECIFICATION**  
 Current Rating:3A/Contact Max.  
 Contact Resistance:20 Milliohms/Contact Max.  
 Insulation Resistance:1000 Megaohms Min. At 100V  
 Operating Voltage:60V AC/DC  
 Operating Temperature:-40°C~+105°C  
 Pin(Outer Sleeve):Brass,Tin Plated Over Nickel  
 Clip(Contact 6 Finger):Beryllium Copper  
 Gold Flash Over Nickel  
 Insulator(Housing):PPS(UL94V-0),Black  
 RoHS Compliant

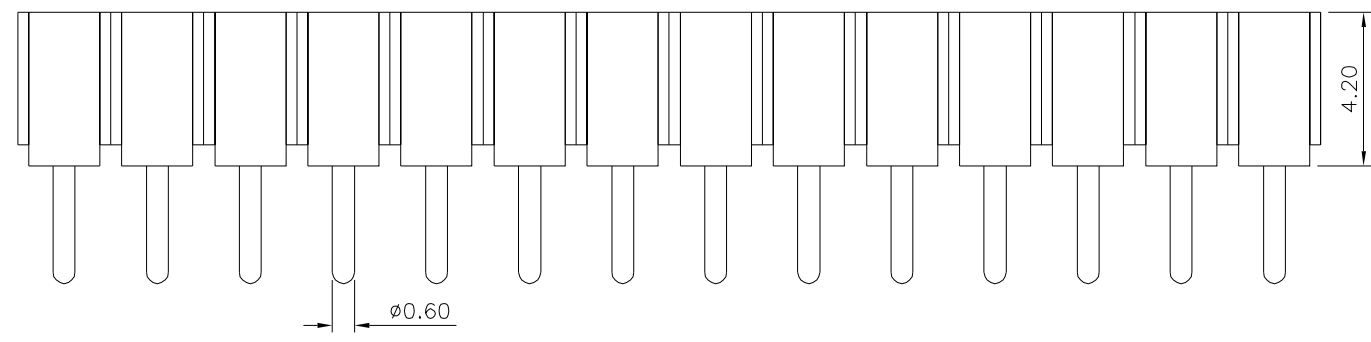

Recommended P.C.B. Layout  
 △ Tolerance  $\pm 0.05$

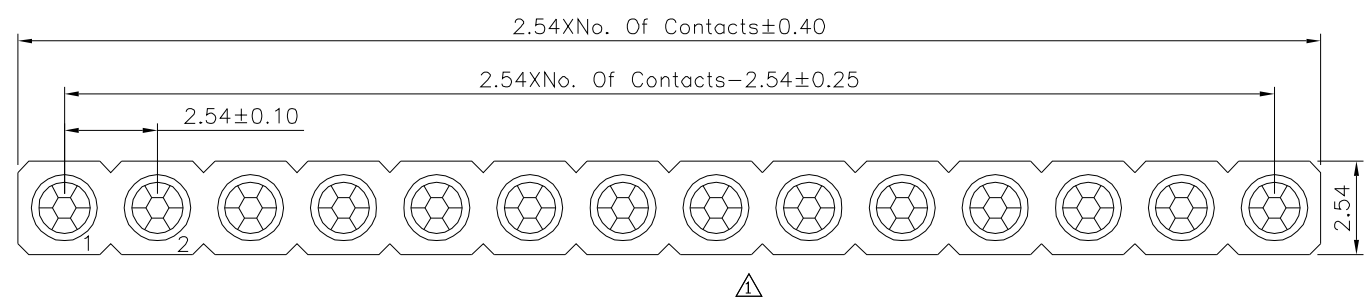

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

|             |  |             |  |  |
|-------------|--|-------------|--|--|
| DRAWING No. |  | APPROVED BY |  | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE<br>X. $\pm 0.50$<br>X $\pm 0.30$<br>XX $\pm 0.20$<br>.XXX $\pm 0.10$<br>ANG. $\pm 5^\circ$ |
| 23072       |  | Jason Wu    |  |  |
|             |  | CHECKED BY  |  |  |
| Leo Han     |  | DRAWING BY  |  |  |
| SCALE       |  | REV.        |  | UNIT   |
| NONE        |  | A1          |  | mm   |

|      |      |             |     |            |
|------|------|-------------|-----|------------|
| NO.  | REV. | REVISIONS   | CHK | DATE       |
| △ A1 |      | Modify Data | HZF | 04/15/2026 |
| △ A0 |      | NEW RELEASE | HZF | 01/20/2016 |