

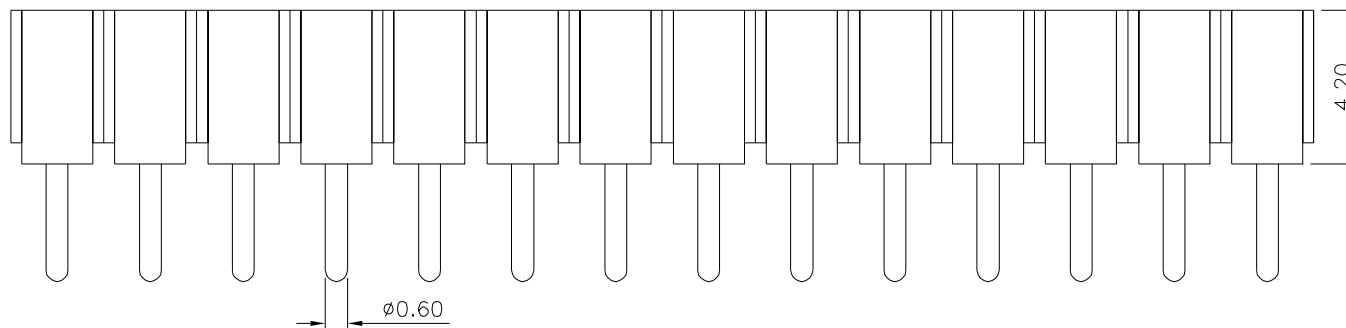


Recommended P.C.B. Layout

$\triangle 1$ Tolerance ± 0.05

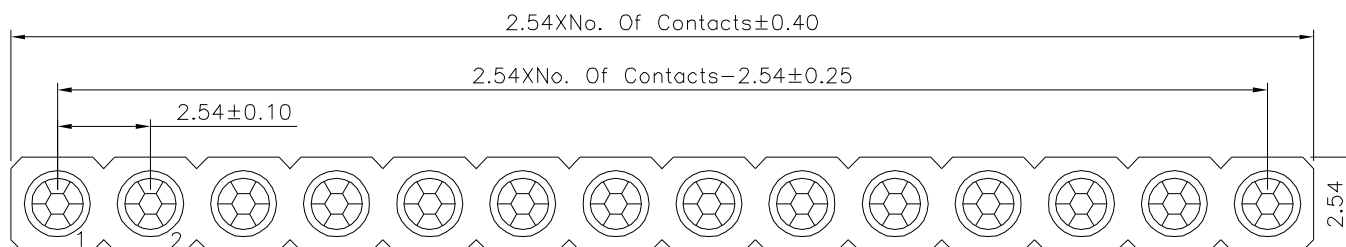

1 SPECIFICATION

Current Rating:3A/Contact Max.
Contact Resistance:20 Milliohms/Contact Max.
Insulation Resistance:1000 Megohms Min. At 100V
Operating Voltage:60V AC/DC
Operating Temperature:-40°C~+105°C
Pin(Outer Sleeve):Brass,Tin Plated Over Nickel
Clip(Contact 6 Finger):Beryllium Copper
Gold Flash Over Nickel
Insulator(Housing):PPS(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

23073

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY


Leo Han

DRAWING BY

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	± 0.50
.X	± 0.30
.XX	± 0.20
.XXX	± 0.10
ANG.	$\pm 5^\circ$

	UNIT
	mm



	A1	Modify Data	HZF	04/15/2026
	A0	NEW RELEASE	HZF	01/20/2016
NO.REV.	REVISIONS		CHK	DATE