

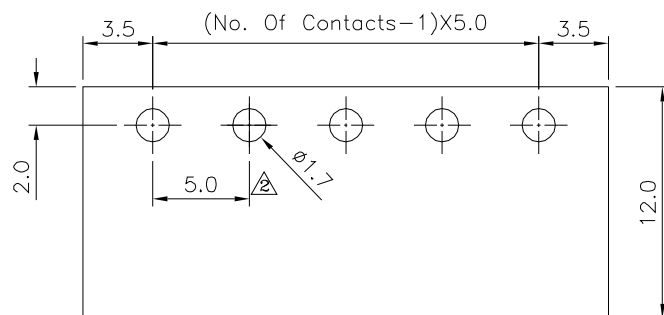
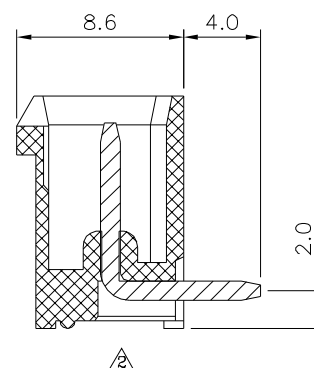


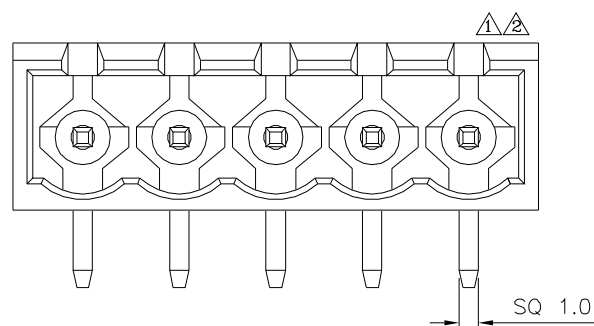

Recommended P.C.B. Layout

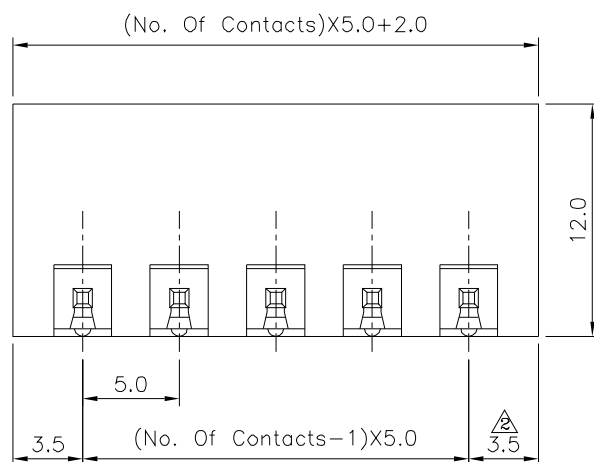

△ SPECIFICATION

Current Rating:16A
Voltage Rating:300V AC
Withstanding Voltage:2500V AC(1 Minute)
Using Temperature Range:-40°C~+105°C
Soldering Temperature:+250°C,5Seconds Max.
Solder Pin:Copper Alloy,Tin Plated
△ Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △△

23095

SCALE NONE

APPROVED BY Jason Wu

CHECKED BY Leo Han

DRAWING BY Michelle Lee

REV. A2

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
X° ±1°

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	03/12/2015
△1	A1	Modify Data	HZF	07/30/2010
△0	A0	NEW RELEASE	HZF	05/13/2009