
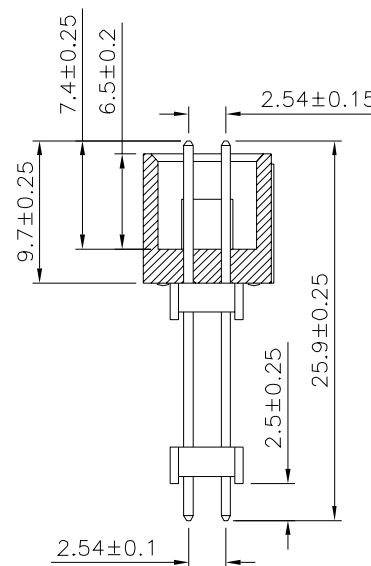
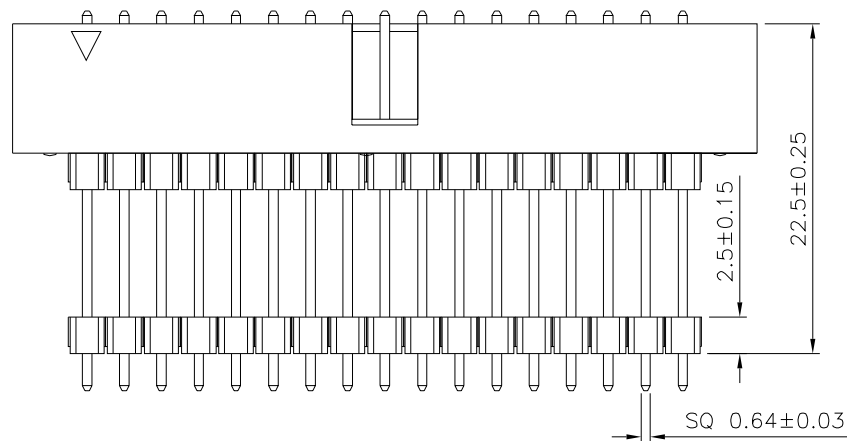


Recommend P.C.B Board Layout
PCB Tolerance: ± 0.05 (Top View)

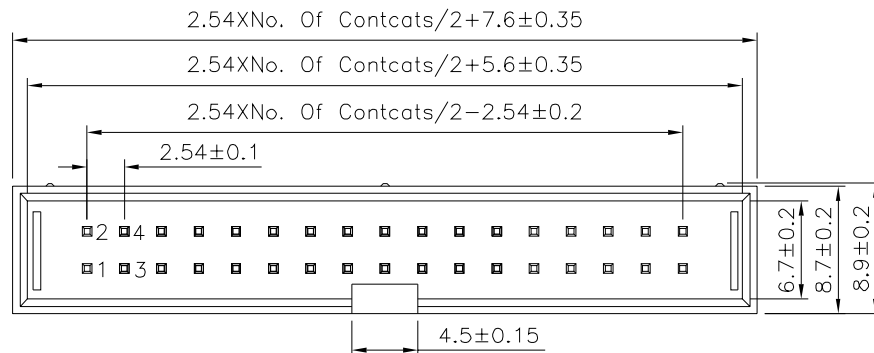

SPECIFICATION

Current Rating: 3A
Withstand Voltage: 1000V AC Min./Minute
Contact Resistance: 20 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Insulator: PA9T(UL94V-0), Black
Contact: Brass, Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

23116

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee


REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.30 X.* $\pm 2^{\circ}$
.X ± 0.25 .X* $\pm 1.5^{\circ}$
.XX ± 0.20 .XX* $\pm 1.0^{\circ}$
.XXX ± 0.15 .XXX* $\pm 0.5^{\circ}$

UNIT
mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE