

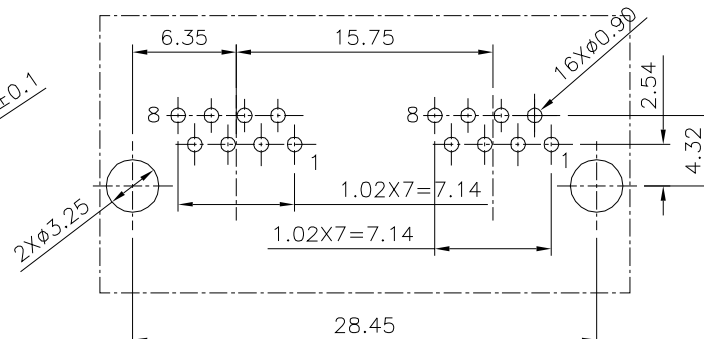
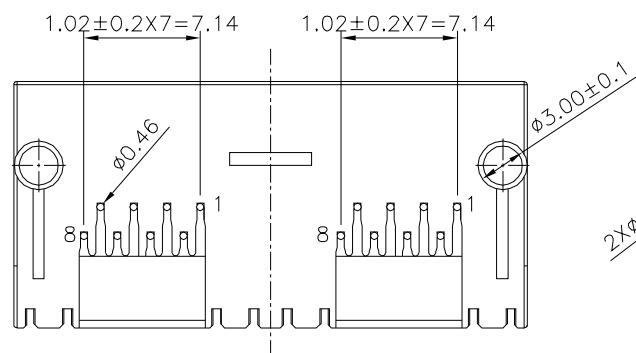


# SPECIFICATION

Current Rating:1.5A  
 Voltage Rating:125V AC RMS.  
 Withstand Voltage:100V AC Or 1500V DC.  
 RMS At 0.5mA 50Hz/60Hz For 1Minute  
 Insulation Resistance:1000 Megaohms Min.  
 At 500V DC.  
 Contact Resistance:20 Milliohms Max.  
 Housing & Insert:LCP(UL94V-0),Black  
 Operation Temperature:-40°C~+85°C  
 Contact:Phosphor Bronze  
 Gold Flash Over All,Over Nickel  
 Mates With Modular Plug Conforming To FCC  
 Part 68, Subpart F.  
 RoHS Compliant

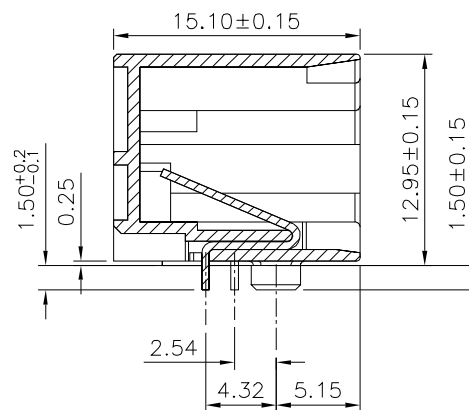

Recommend P.B.C Layout(Component Sied)  
 P.B.C Thickness=1.6mm(Tolerance=±0.05)

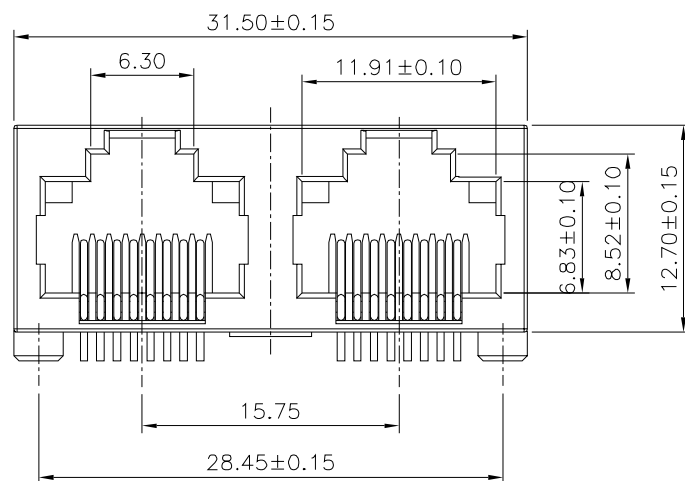

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

23126

APPROVED BY  
 Jason Wu

CHECKED BY  
 Leo Han

DRAWING BY  
 Michelle Lee

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 0~15 ±0.15  
 15~20 ±0.20  
 30~ ±0.25  
 ANG. ±1°


SCALE

NONE

REV.

A0

UNIT  
 mm



NO. REV.

REVISIONS

CHK

DATE

△ A0

NEW RELEASE

HZF

01/28/2026