


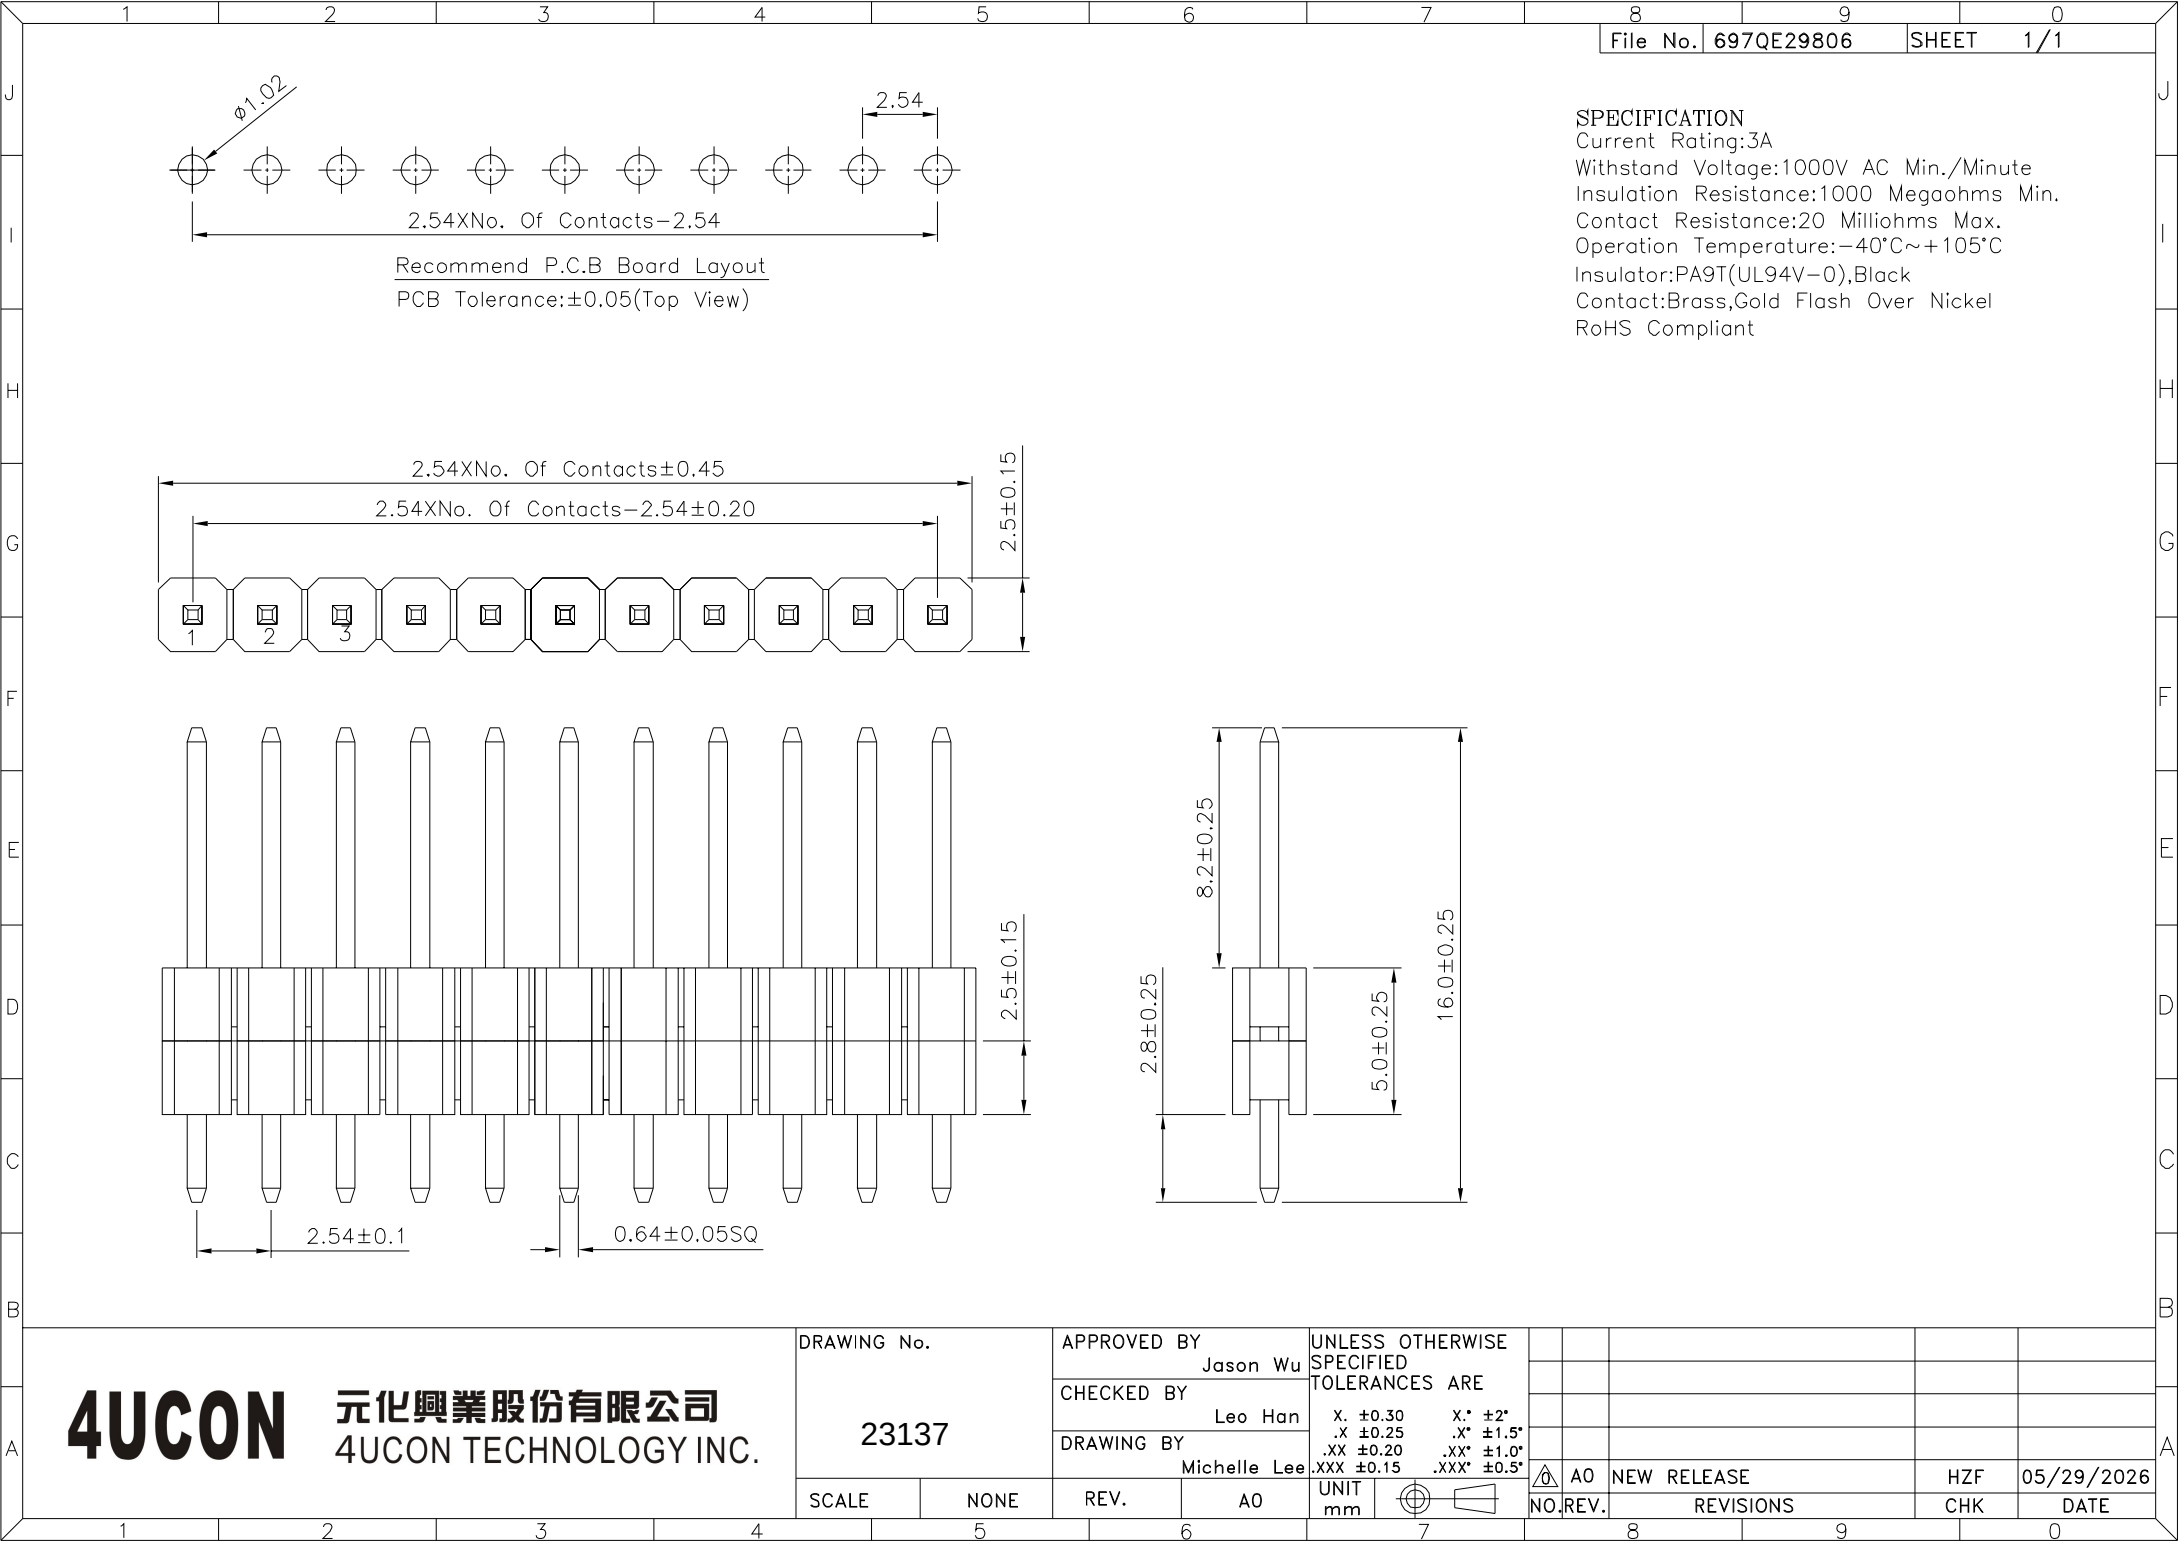

SPECIFICATION
Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Operation Temperature:-40°C~+105°C
Insulator:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4Ucon 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 23137		APPROVED BY Jason Wu		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 X.* ±2" .X ±0.25 .X.* ±1.5" .XX ±0.20 .XX.* ±1.0" .XXX ±0.15 .XXX.* ±0.5"						
		CHECKED BY Leo Han								
		DRAWING BY Michelle Lee								
SCALE	NONE	REV.	A0	UNIT mm		NO.	REV.	NEW RELEASE	HZF	05/29/2026
								REVISIONS	CHK	DATE