

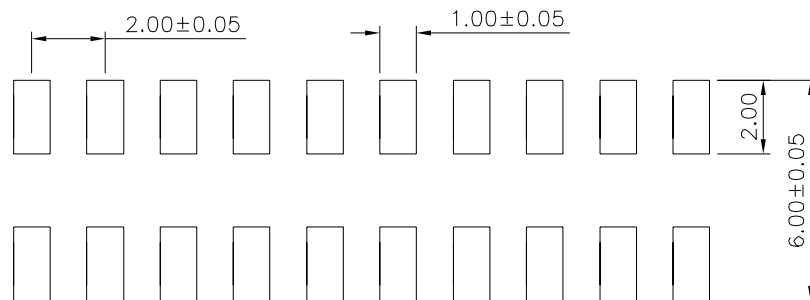


SPECIFICATION

Current Rating:1.5A
 Withstand Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 ⚠ Housing:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

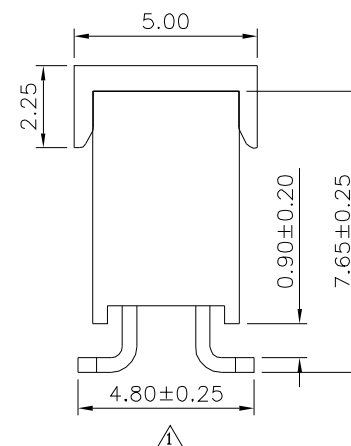

⚠ Recommended P.C.B. Layout

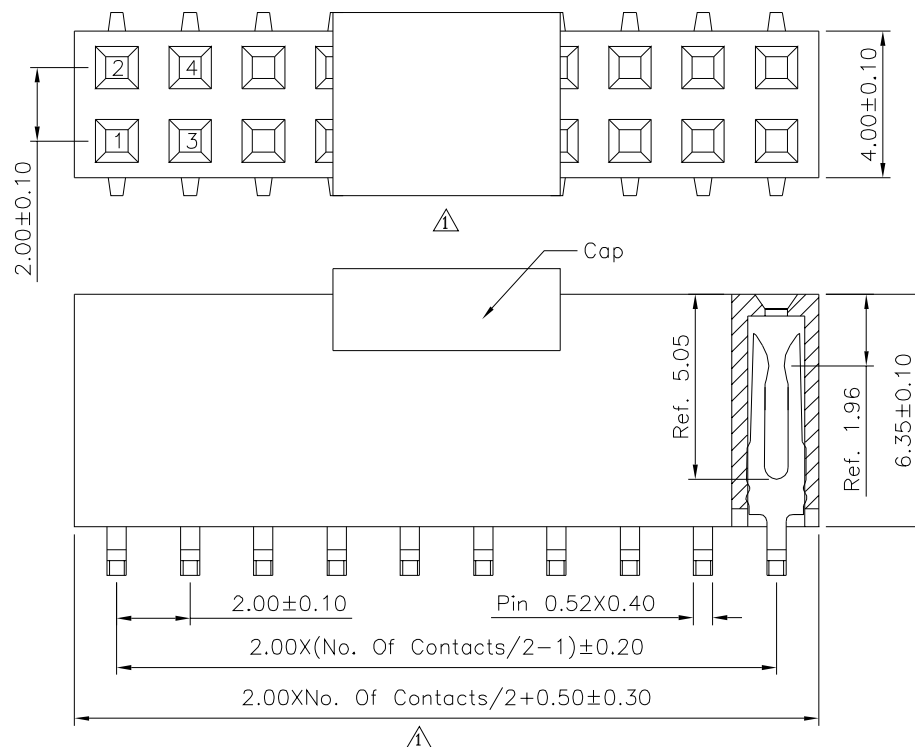

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

23149

SCALE

NONE

REV.

A1

APPROVED BY

Jason Wu

CHECKED BY


Leo Han

DRAWING BY

Michelle Lee

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.30
 .XX ±0.20

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
⚠ A1	Modify Data	HZF	04/19/2023	
⚠ A0	NEW RELEASE	HZF	01/27/2018	