


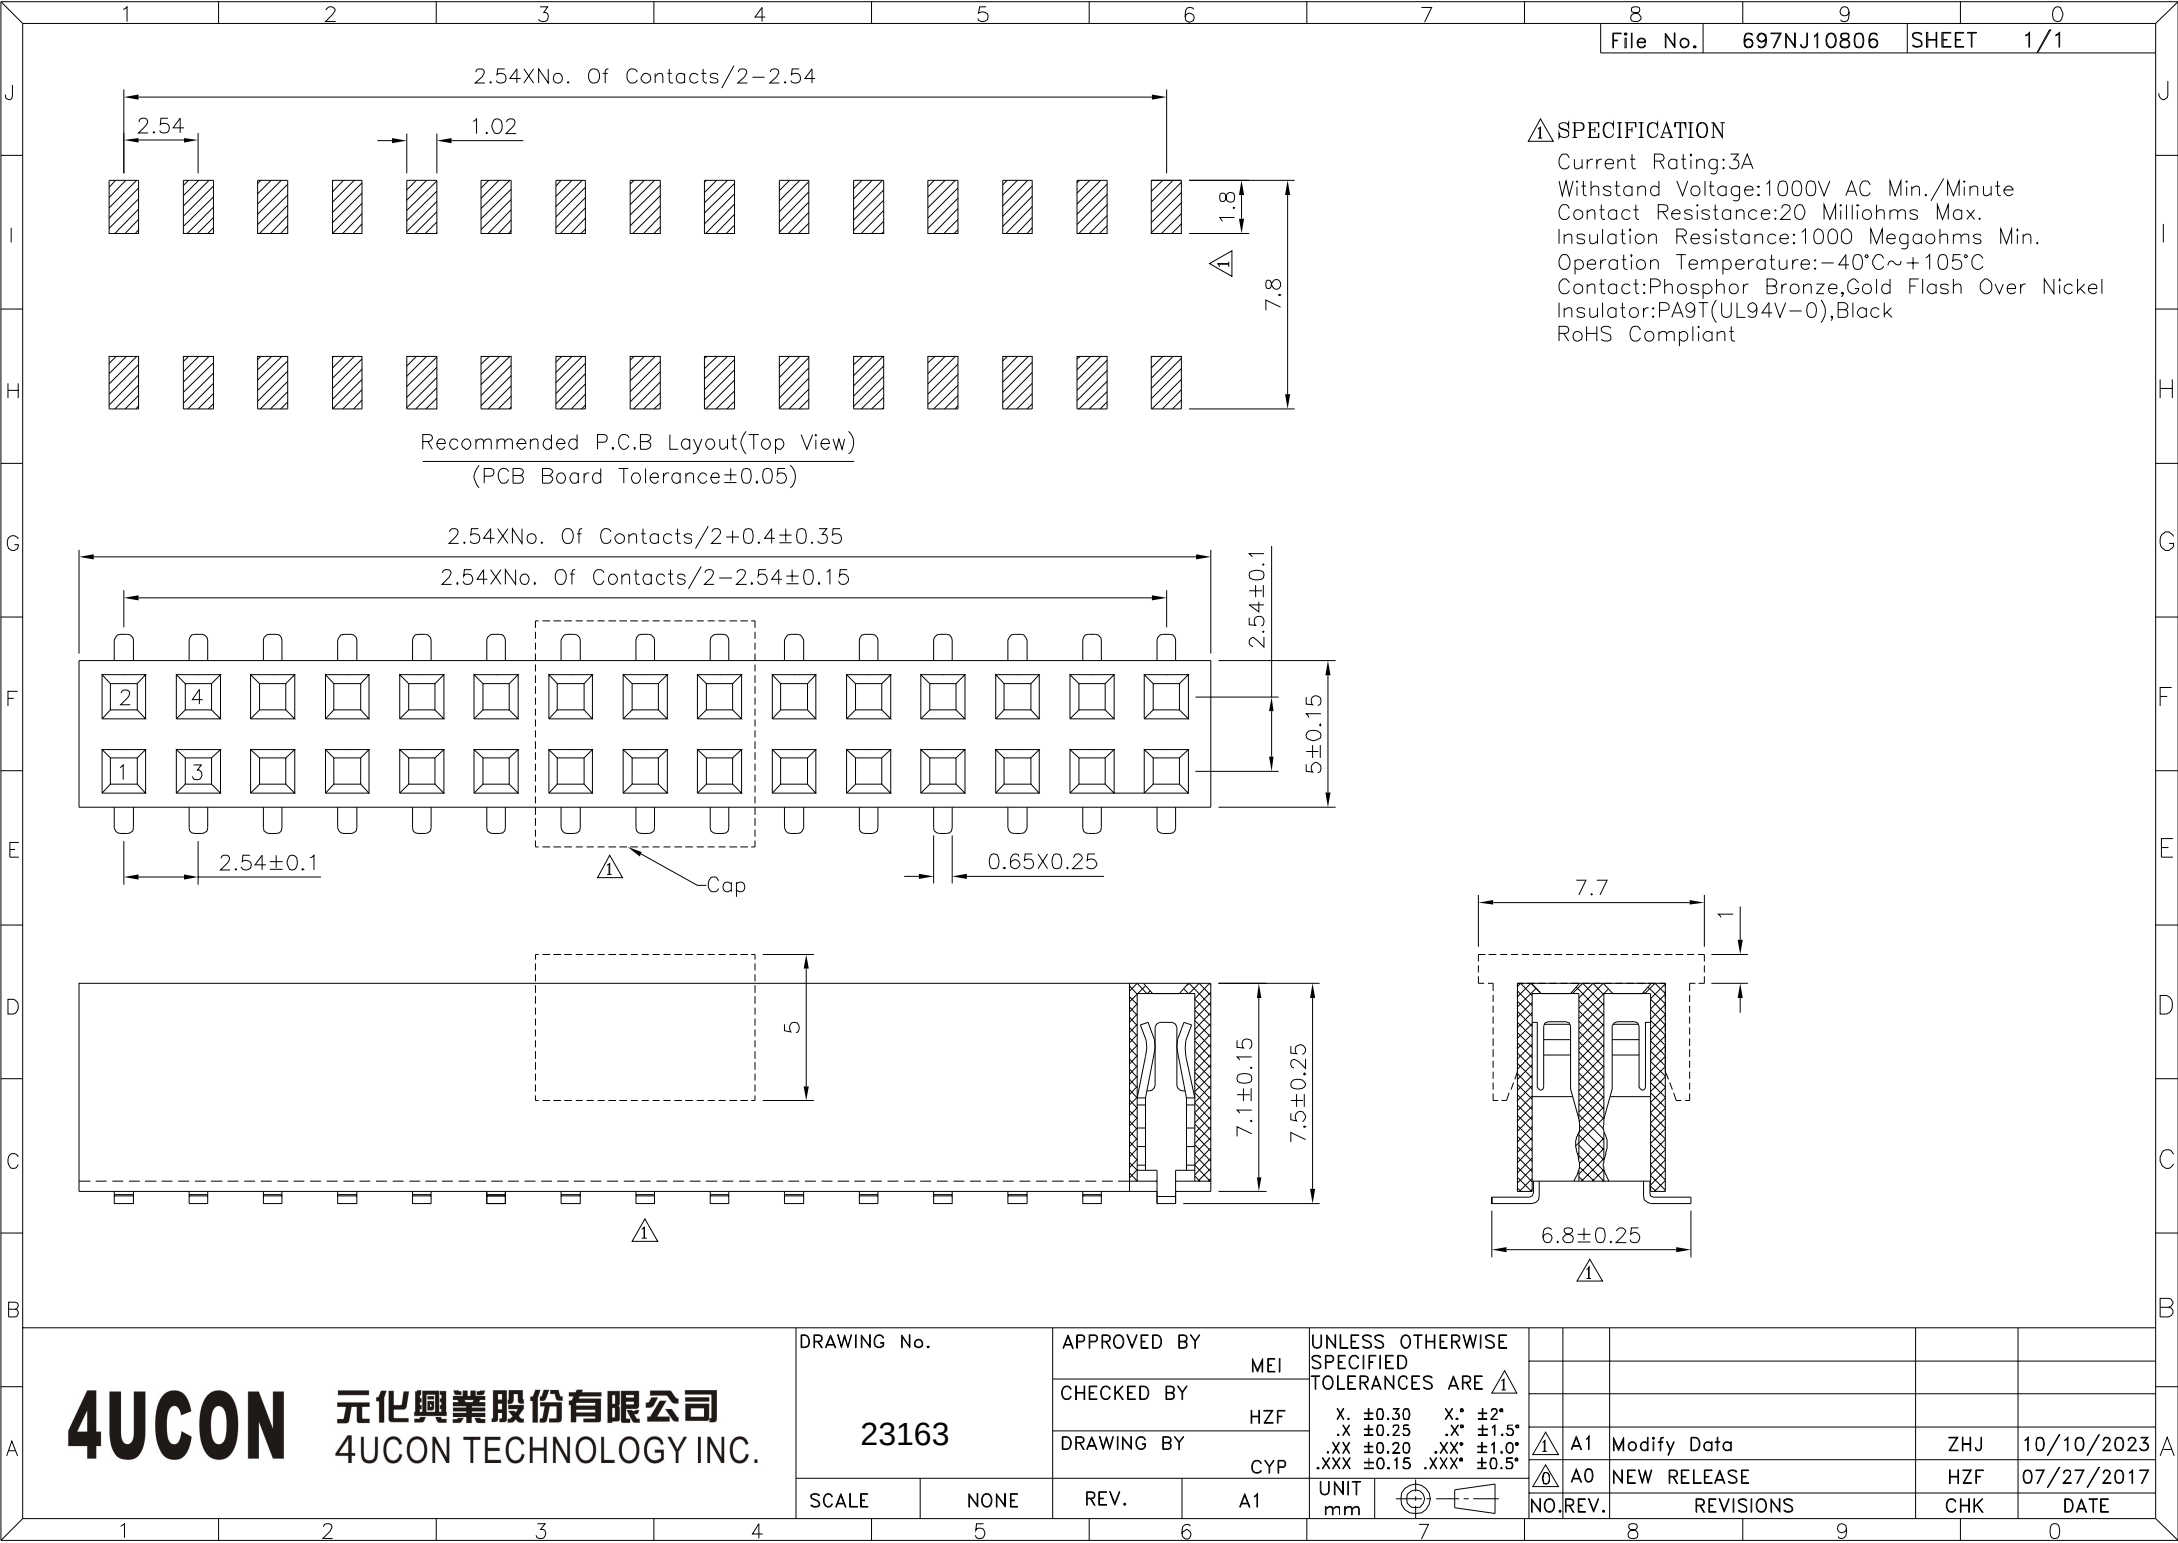

△ SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA9T(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	HZF
23163		DRAWING BY	CYP
		SCALE	NONE
REV.		A1	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △					
X. ±0.30 X.* ±2"					
.X ±0.25 .X* ±1.5"					
.XX ±0.20 .XX* ±1.0"					
.XXX ±0.15 .XXX* ±0.5"					
UNIT	mm				

NO. REV.		REVISIONS		CHK		DATE	
A1		Modify Data		ZHJ		10/10/2023	
A0		NEW RELEASE		HZF		07/27/2017	