
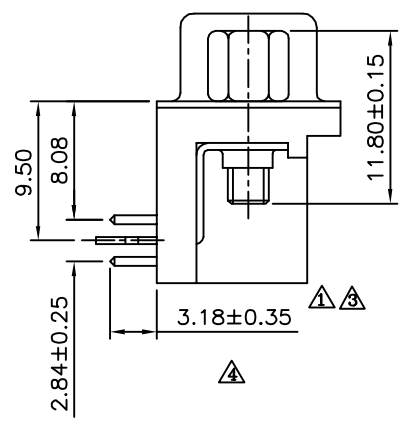
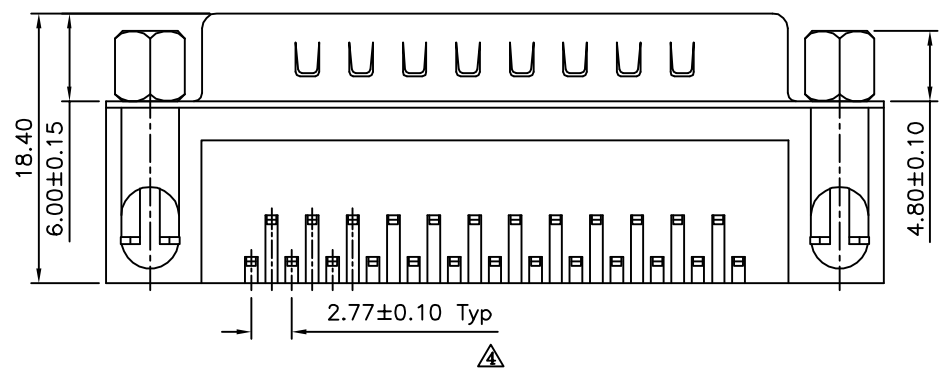


△ Recommended P.C.B. Layout

△ SPECIFICATION
 Current Rating: 5 Amps
 Withstanding Voltage: 1000V(One Minute)
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 At 500V DC
 Operating Temperature: -50°C~+105°C
 Shell: SPCC, Nickel Plated
 Insulator: PBT+30%G.F.(UL94V-0)
 Contact: Brass, Gold Flash On Contact Area, Tin Plated On Solder Tail, Under Nickel
 Z Flake: SPCC, Tin Plated
 Screw: 12L14, Nickel Plated
 RoHS Compliant

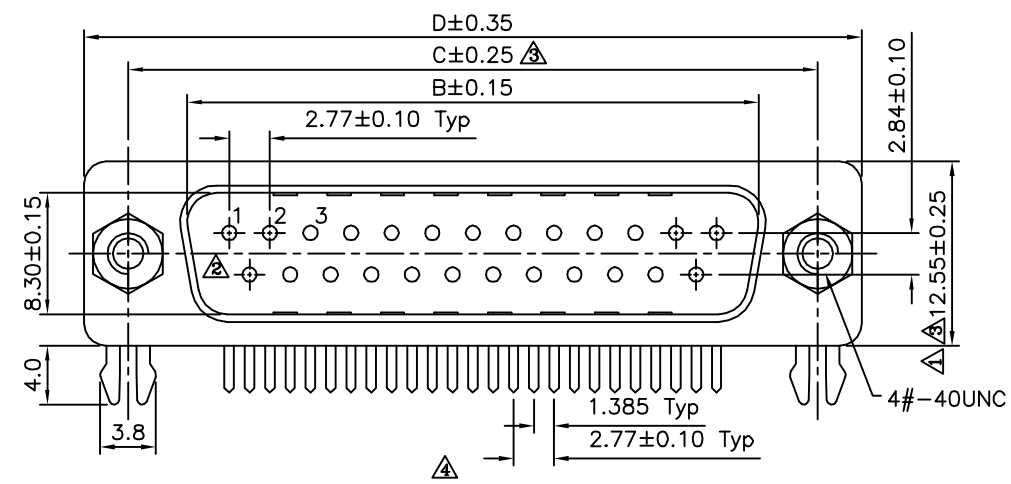

△ △	Pin	B	C	D
	09	16.92	24.99	30.81
	15	25.25	33.32	39.20
	25	38.96	47.04	53.04
	37	55.42	63.50	69.40

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X ±0.38 .X° ±3° .XX ±0.25 .XX° ±1° .XXX ±0.05 .XXX° ±0.5°
02816		MEI		
		CHECKED BY	HZF	
		DRAWING BY	WSS	
SCALE	NONE	REV.	A4	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A4		Modify Data	HZF	10/27/2011
△ A3		Modify Dim	HZF	12/25/2008
△ A2		Add Layout & Pin Code	HZF	09/01/2008
△ A1		Modify & Add Dim.	SHIN	05/11/2007
△ A0		NEW RELEASE	HZF	10/23/2006