
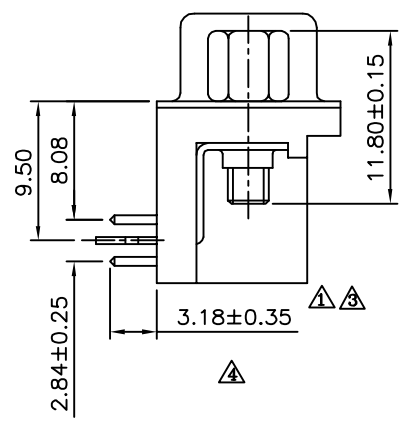
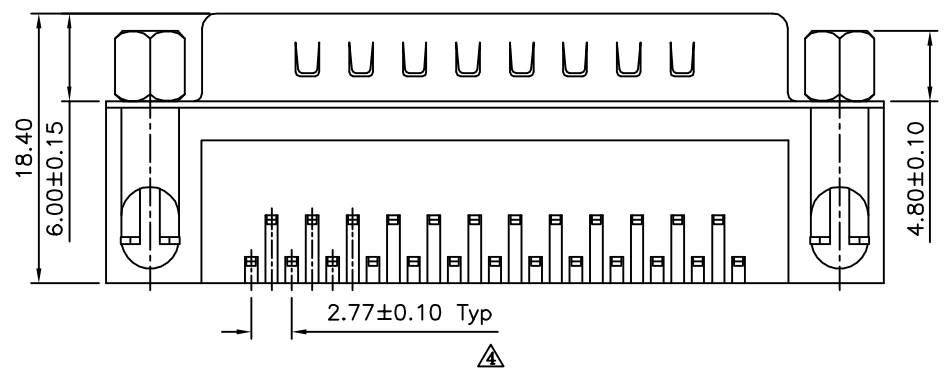


**△ SPECIFICATION**  
 Current Rating: 5 Amps  
 Withstanding Voltage: 1000V(One Minute)  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 At 500V DC  
 Operating Temperature: -50°C~+105°C  
 Shell: SPCC, Nickel Plated  
 Insulator: PBT+30%G.F.(UL94V-0)  
 Contact: Brass, Gold Flash On Contact Area, Tin Plated On Solder Tail, Under Nickel  
 Z Flake: SPCC, Tin Plated  
 Screw: 12L14, Nickel Plated  
 RoHS Compliant

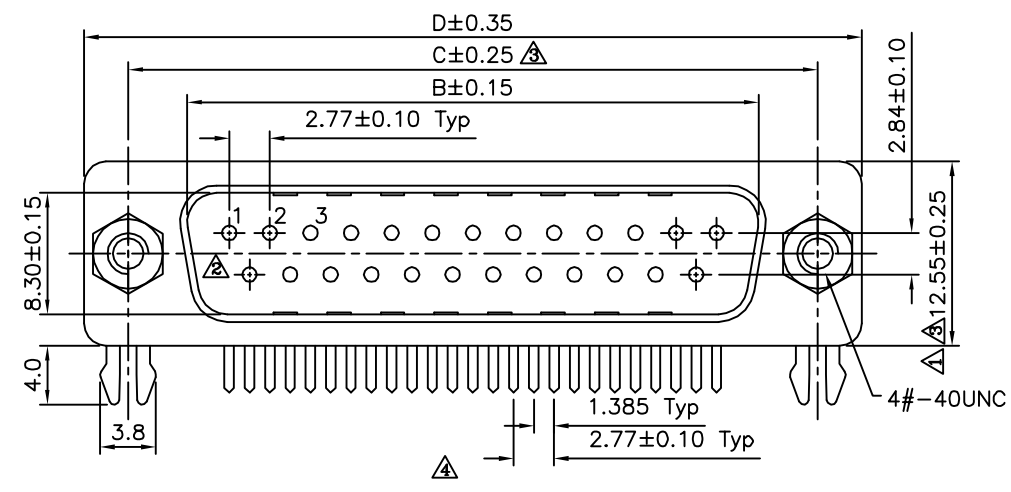

| △ △ | Pin | B     | C     | D     |
|-----|-----|-------|-------|-------|
|     | 09  | 16.92 | 24.99 | 30.81 |
|     | 15  | 25.25 | 33.32 | 39.20 |
|     | 25  | 38.96 | 47.04 | 53.04 |
|     | 37  | 55.42 | 63.50 | 69.40 |

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

|             |  |             |  |  |             |                       |            |            |
|-------------|--|-------------|--|--|-------------|-----------------------|------------|------------|
| DRAWING No. |  | APPROVED BY |  | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE<br>△ X ±0.38 .X° ±3°<br>.XX ±0.25 .XX° ±1°<br>.XXX ±0.05 .XXX° ±0.5° | △ A4        | Modify Data           | HZF        | 10/27/2011 |
| 02828       |  | MEI         |  |  | △ A3        | Modify Dim            | HZF        | 12/25/2008 |
| SCALE       |  | CHECKED BY  |  |  | △ A2        | Add Layout & Pin Code | HZF        | 09/01/2008 |
| NONE        |  | HZF         |  |  | △ A1        | Modify & Add Dim.     | SHIN       | 05/11/2007 |
| REV.        |  | DRAWING BY  |  | △ A0   | NEW RELEASE | HZF                   | 10/23/2006 |            |
| A4          |  | WSS         |  | NO.  | REV.        | REVISIONS             | CHK        | DATE       |
| UNIT        |  | REV.        |  |  |             |                       |            |            |
| mm          |  | A4          |  |  |             |                       |            |            |