


**SPECIFICATIONS:**

Contact Current Rating: 1 Ampere  
 Dielectric Withstanding Voltage: AC 500V R.M.S.  
 Insulation Resistance : 500Megohms Min. At DC 500V  
 Contact Resistance: 30Milliohms. Max.  
 Operating Temperature: -55°C ~ +105°C  
 Contact: Brass , Gold Flashed  
 Insulator: P.B.T. UL94V-0 Rated  
 Shell: Cold Rolled Steel, Nickel , Tin, Zinc Plated

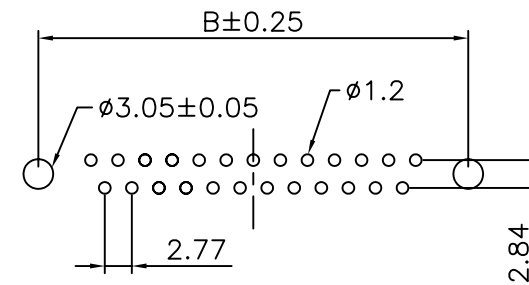

Recommended P.C.B. Layout

Circuits	A±0.25	B±0.25	C±0.25
09	30.80	25.00	16.92
15	39.20	33.32	25.25
19	44.80	38.86	30.60
23	50.30	44.30	36.10
25	53.05	47.04	38.96
37	69.40	63.50	55.42

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

02861

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE

.X ±0.38

.XX ±0.25


ANG.

SCALE NONE

REV.

A

UNIT mm



NO. REV.

A NEW RELEASE

REVISIONS

MEI

CHK

07/23/1997

DATE