
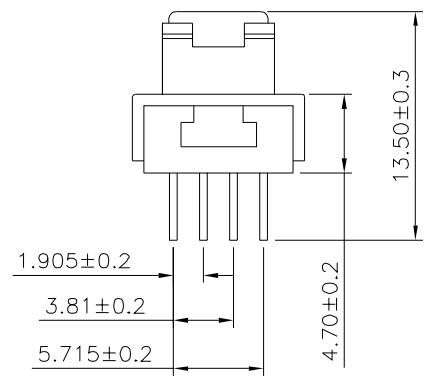
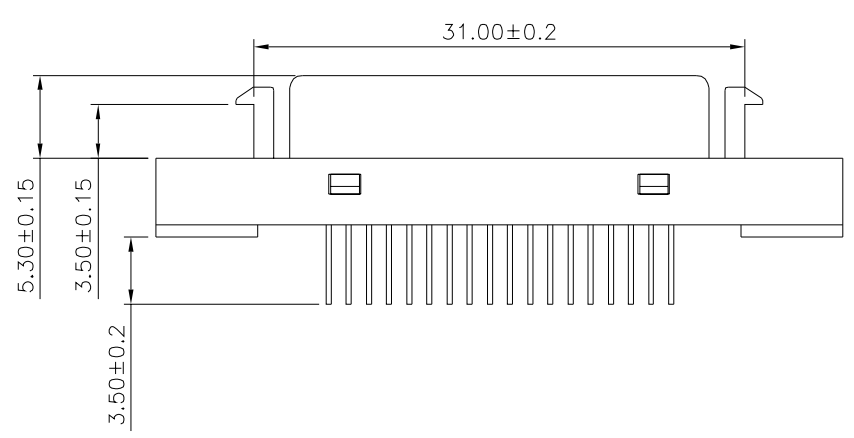


**SPECIFICATION**  
 Contact Current Rating:0.5 Amp  
 Dielectric Withstanding Voltage:500V AC  
 Insulation Resistance:500 Megaohms Min  
 Contact Resistance:35 Milliohms Max  
 Operation Temperature:-55°C~+85°C  
 Housing:PBT(UL94V-0),Black  
 Contacts:Phosphor Bronze,  
 Selective Gold Plated 5u" Over Nickel  
 Front Shell:Steel,Nickel Plated Over Copper  
 Bracket:Zinc Alloy,Nickel Plated Over Copper  
 RoHS Compliant

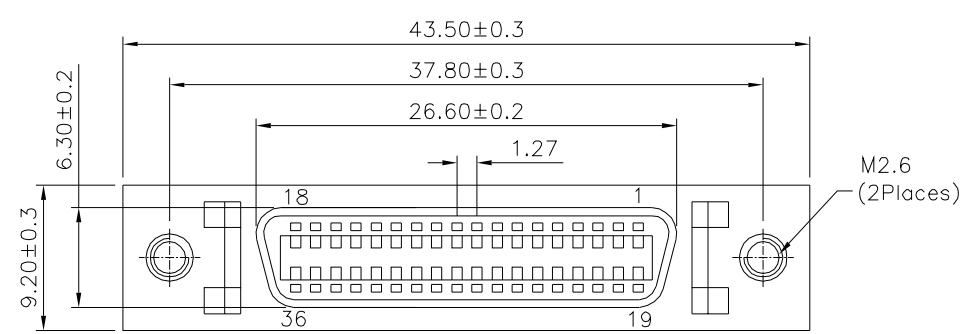

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25
08748		MEI		
		HZF		
		DRAWING BY		
		LZX		
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△A0		NEW RELEASE	HZF	12/20/2022