File No.	689	SHEET	1/1

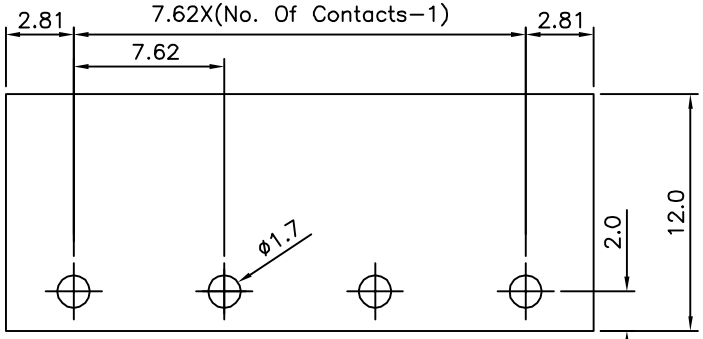

P.C.B. Layout

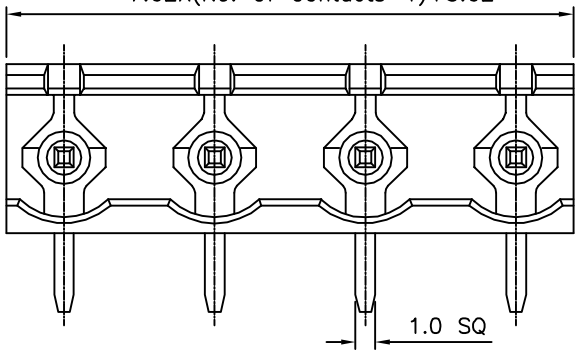

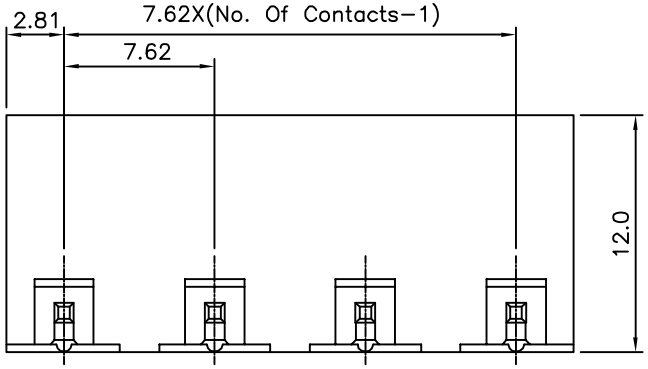

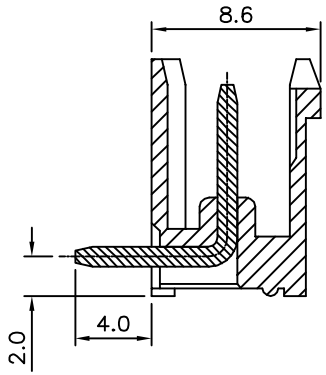

SPECIFICATION

Current Rating:10A
Voltage Rating:250V AC
Insulation Resistance:500 Megaohms At DC 500V
Withstanding Voltage:AC 1500V(1 Minute)
Using Temperature Range:−40°C To +105°C
Soldering Temperature:250°C,5 Seconds Max.
Solder Pin:Copper Alloy,Tin Plated
Insulator Body(Housing):Polyamide Glass Filled(UL94V−0),Green
RoHS Compliant

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE				
13915	MEI	X. ±0.30				
	CHECKED BY HZF	.X ±0.15				
	DRAWING BY XYH	.XX ±0.05				
		ANG. ±1°				
SCALE NONE	REV. A0	UNIT mm	⓪	A0	NEW RELEASE	HZF 03/10/2010
			NO.	REV.	REVISIONS	CHK DATE