
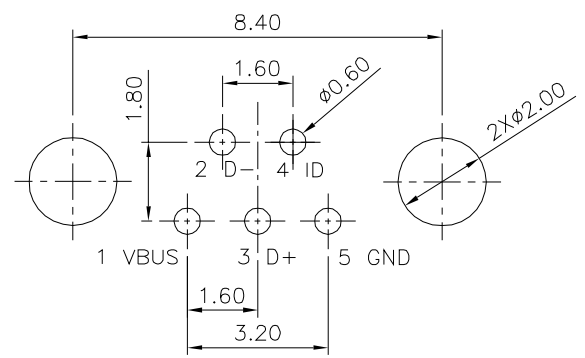


SPECIFICATION
 Current Rating:1.0A Max.
 Voltage Rating:30V Max.
 Withstanding Voltage:100V AC
 Contact Resistance:50 Milliohms Max.
 Insulation Resistance:100 Megaohms Min.
 Temperature Range:-55°C~+85°C
 Mating Force:35N Max.
 Withdrawal Force:7N Min.
 Durability:5000 Cycles,0.3 Kgf Min.
 Contacts:Phosphor Bronze
 Gold Flash On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 Insulator:LCP+30%G.F.(UL94V-0),Black
 Shell:Phosphor Bronze,Nickel Plated Over All
 RoHS Compliant

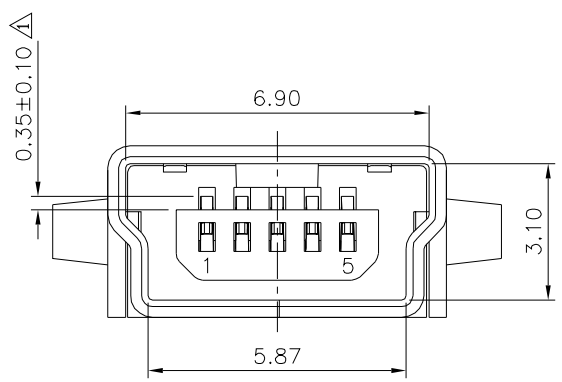

Recommended P.C.B. Layout
 (Thickness=1.00mm)

Pin	Function
1	VBUS
2	D-
3	D+
4	ID
5	GND

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
19378		MEI		
SCALE		CHECKED BY		
NONE		HZF		
REV.		DRAWING BY		.X ±0.38 .X* ±1.0*
B1		YBL		.XX ±0.25 .XX* ±0.5*
				.XXX ±0.15 .XXX* ±0.2*
				UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△	B1	Modify Data	HZF	11/18/2024
△	B0	Modify Data	HZF	09/15/2013
△	B0	NEW RELEASE	HZF	09/15/2013