

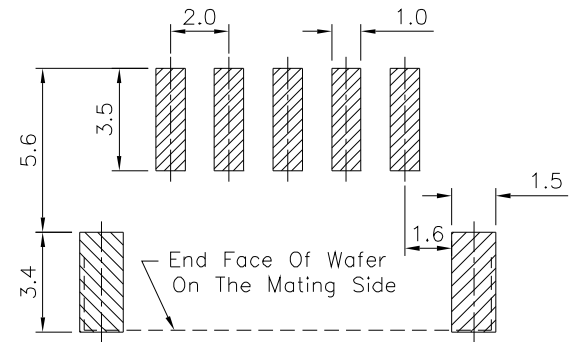
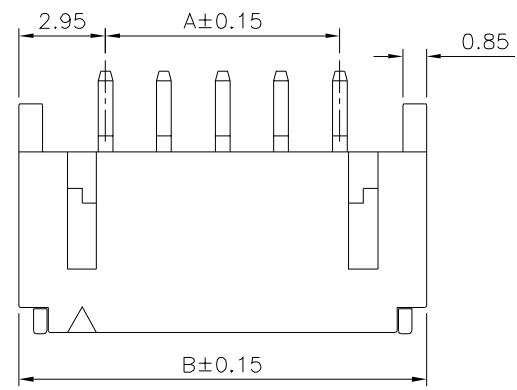
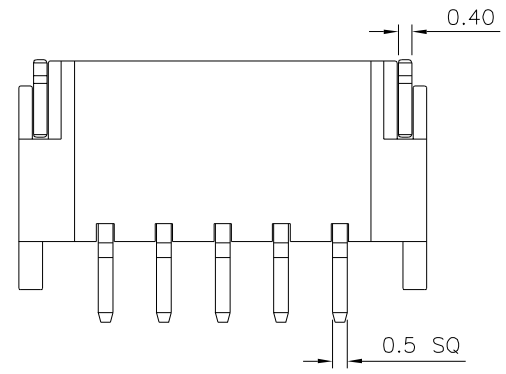


△ SPECIFICATION

Current Rating:2A AC/DC  
 Voltage Rating:100V AC/DC  
 Withstand Voltage:800V AC/Minute  
 Contact Resistance:Initial Value 10 Milliohms Max.  
 After Environmental Testing 20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Temperature Range:-40°C~+85°C  
 Applicable PC Board Thickness:0.8~1.6mm  
 Insulator:HTN(UL94V-0)  
 Contact:Brass,Tin Plated Over Nickel  
 RoHS Compliant

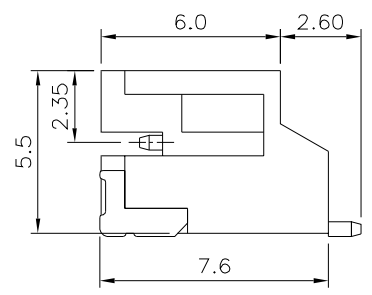

Recommended P.C.Board Layout △

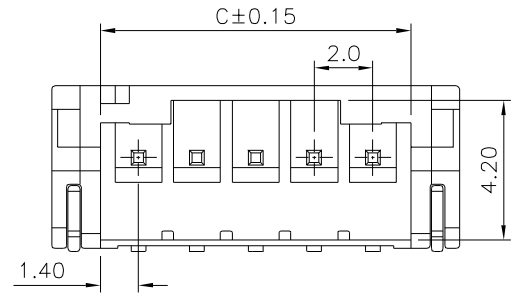

Pin	A	B	C
2	2.00	8.00	4.80
3	4.00	10.00	6.80
4	6.00	12.00	8.80
5	8.00	14.00	10.80
6	10.00	16.00	12.80
7	12.00	18.00	14.80
8	14.00	20.00	16.80
9	16.00	22.00	18.80
10	18.00	24.00	20.80
11	20.00	26.00	22.80
12	22.00	28.00	24.80
13	24.00	30.00	26.80
14	26.00	32.00	28.80
15	28.00	34.00	30.80
16	30.00	36.00	32.80

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △  
 20072

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 △△ .X ±0.3  
 .XX ±0.2  
 ANG.

SCALE NONE REV. A3

NO.	REV.	REVISIONS	CHK	DATE
△	A3	Modify Data	HZF	08/14/2018
△	A2	Modify Data	HZF	10/04/2013
△	A1	Modify Data	HZF	08/09/2012
△	A0	NEW RELEASE	HZF	12/27/2007