

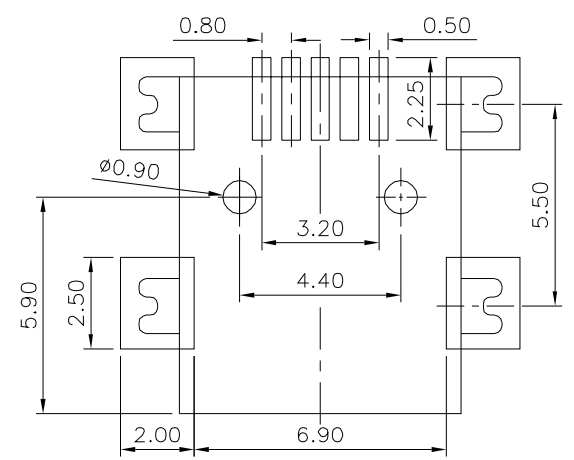
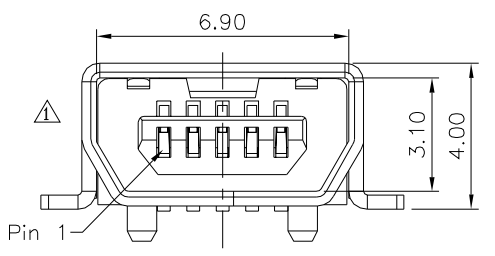
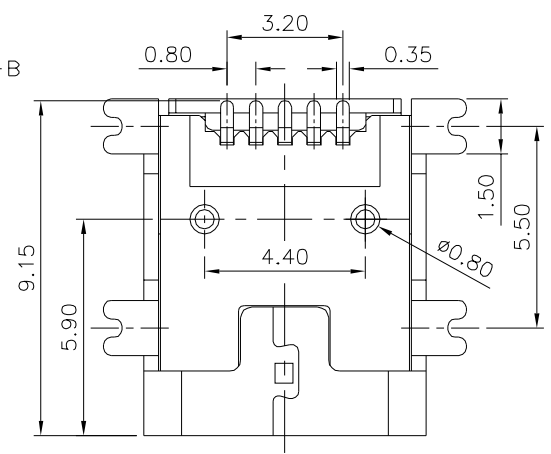
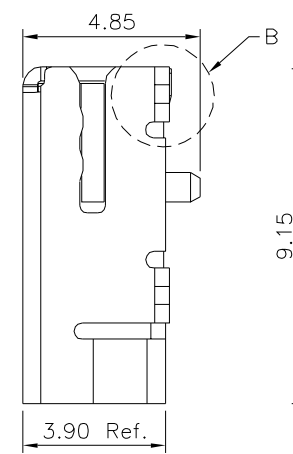


△ SPECIFICATION
 Current Rating:1A Max.
 Withstand Voltage:100V AC For One Minute
 Contact Resistance:50 Milliohms Max.
 Insulation Resistance:100 Megaohms Min.
 Temperature Range:-55°C~+85°C
 Insulator:LCP+30%G.F.(UL94V-0),Black
 Contact:C5191-EH
 Gold Flash On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 Shell:C2680R-H,Nickel Plated Over All
 Mylar:Polyimide Tape
 Total Mating Force:3.57 kgf Max.
 Total Unmating Force:0.7 kgf Min.
 After Durability 5000 Cycles,0.3 kgf Min.
 RoHS Compliant

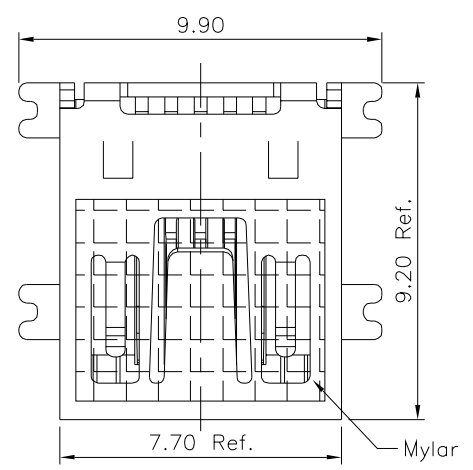

Recommended P.C.B. Layout

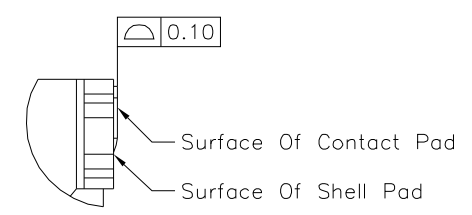

△ Detail B

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 △X* ±2.0° .XX ±0.25 .XX* ±1.0° .XXX ±0.13 .XXX* ±0.5°	△A4	Modify Data	HZF	11/13/2015
20236		MEI			△A3	Modify Data	HZF	08/29/2013
		CHECKED BY			△A2	Modify Data	HZF	08/31/2012
		HZF		△A1	Modify Data	HZF	05/21/2012	
		DRAWING BY		△A0	NEW RELEASE	HZF	05/26/2009	
SCALE	NONE	REV.	A4	UNIT	NO.REV. REVISIONS		CHK	DATE
				mm				