File No.	561LE25001	SHEET	1/1

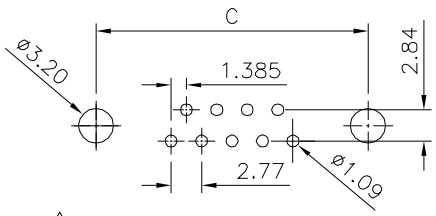

△3 Recommended P.C.B. Layout

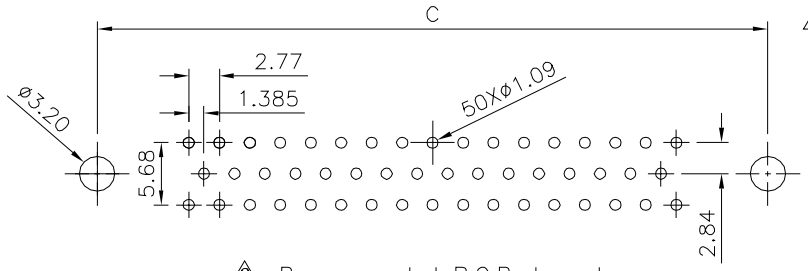

△3 Recommended P.C.B. Layout

△4△3 SPECIFICATION

Current Rating:1 Amps
Withstanding Voltage:500V(One Minute)
Insulation Resistance:1000 Megaohms Min.
At 500V DC
Contact Resistance:30 Milliohms Max.
Operation Temperature:−40°C~+85°C
Insulator:PBT+30%G.F.(UL94V−0),White
Contact:Brass,Gold Flash Over Nickel
Shell:Steel,Front:Nickel Plated,Rear:Tin Plated
RoHS Compliant

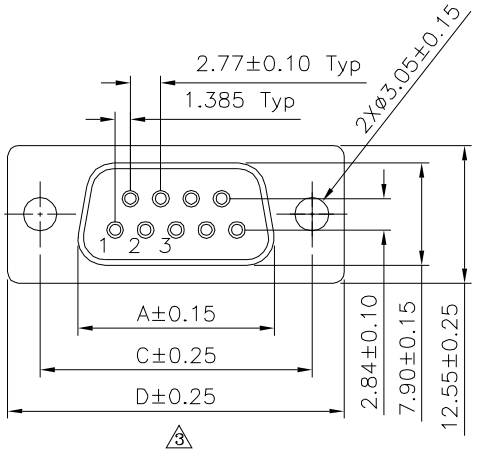

△3

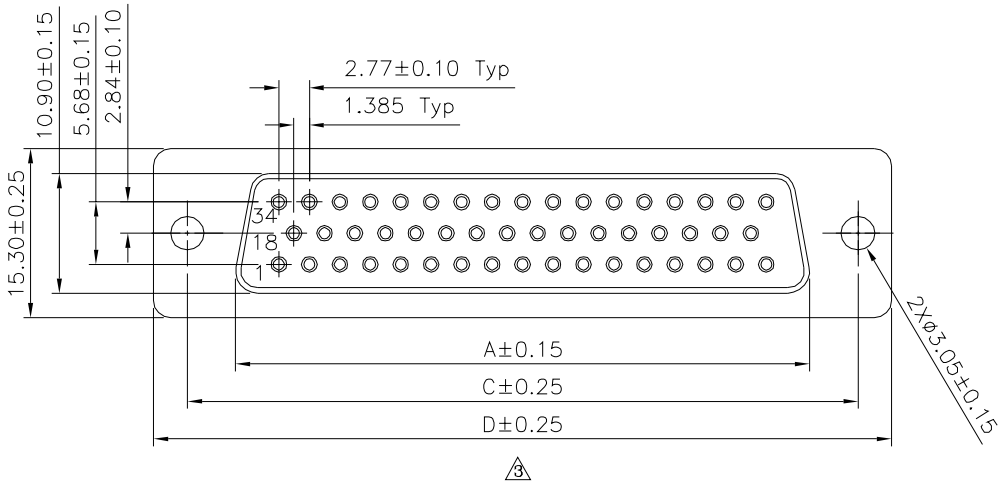

△3

△3 Pin	A	C	D	E
09	16.33	24.99	30.81	19.20
15	24.80	33.32	39.20	27.70
25	38.38	47.04	53.04	41.10
37	54.84	63.50	69.40	57.30
50	52.20	61.00	67.00	55.10

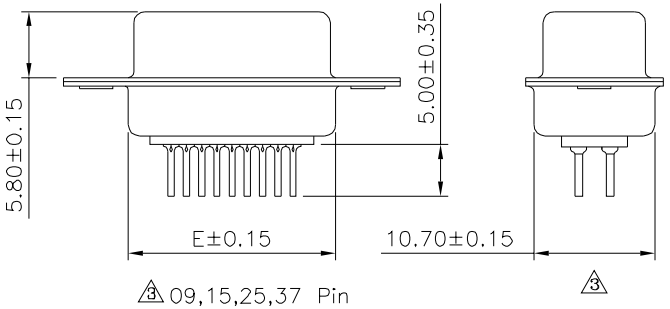

△3 09,15,25,37 Pin

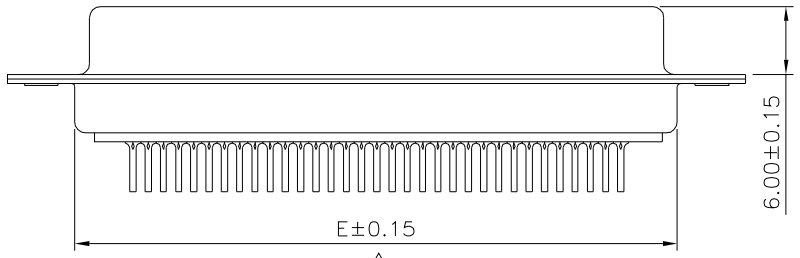

△3

50 Pin



△3

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No. △1△3	APPROVED BY MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
22324	CHECKED BY HZF	△3 .X ±0.38 .X° ±3° .XX ±0.25 .XX° ±1° .XXX ±0.05 .XXX° ±0.5°
	DRAWING BY CYP	
SCALE NONE	REV. A4	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△4	A4	Modify Data	HZF	06/27/2017
△3	A3	Modify Data	HZF	12/18/2011
△2	A2	Modify Data	HZF	08/20/2008
△1	A1	Modify Data	HZF	08/14/2008
△0	A0	NEW RELEASE	HZF	09/19/2007