

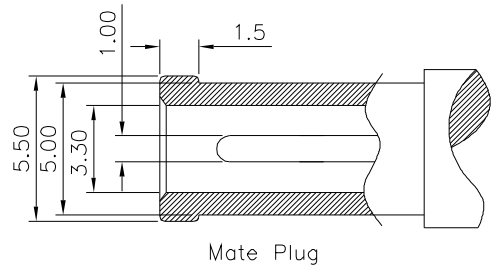


△ SPECIFICATION
 Current Rating: 1A DC
 Voltage Rating: 18V DC
 Withstand Voltage: 500V AC RMS(50~60Hz)/Minute
 Insulation Resistance: 50 Megaohms Min.
 At 500V DC/Minute
 Contact Resistance: 100 Milliohms Max.
 Operation Temperature: -25°C ~ +85°C
 RoHS Compliant

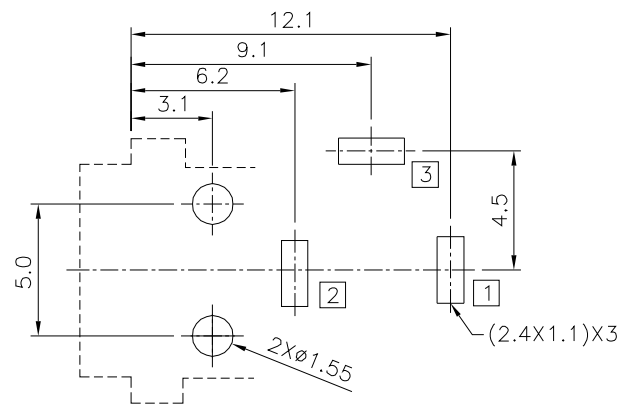

RoHS Compliant

④	Terminal	1	Phosphor Bronze	Silver Plated
③	Terminal	1	Brass	Silver Plated
②	Terminal	1	Brass	Silver Plated
①	Housing	1	PBT+G.F.	Black
No.	Description	Q'ty	Material	Remark

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ± 0.3 .X ± 0.2 .XX ± 0.1 .XXX ± 0.05
22563		MEI		
		CHECKED BY HZF		
DRAWING BY CYP		UNIT mm		
SCALE	NONE	REV.	A1	

△ A1	Modify Data	HZF	02/12/2022
△ A0	NEW RELEASE	HZF	10/09/2017
NO.	REV.	REVISIONS	CHK DATE