



SPECIFICATION






Current Rating:1 Amps
 Withstand Voltage:500V For 1 Minute
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 At 500V DC
 Operation Temperature:-55°C~+105°C
 Insulator:PBT+30%G.F.(UL94V-0),White
 Contact:Brass,Gold Flash Over Nickel
 Shell:Steel,Front:Nickel Plated,Rear:Tin Plated
 Screw:Steel,Nickel Plated
 Boardlocks:Brass,Tin Plated
 RoHS Compliant

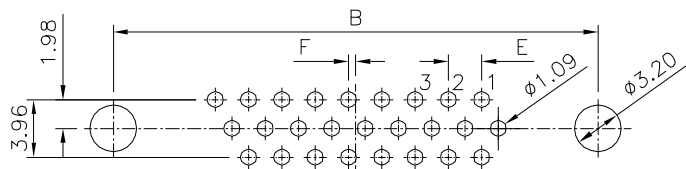

Recommended P.C.B. Layout(26,44,62 Pin)

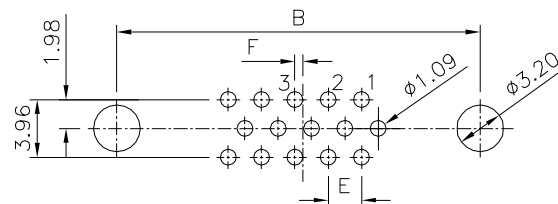

Recommended P.C.B. Layout(15 Pin)

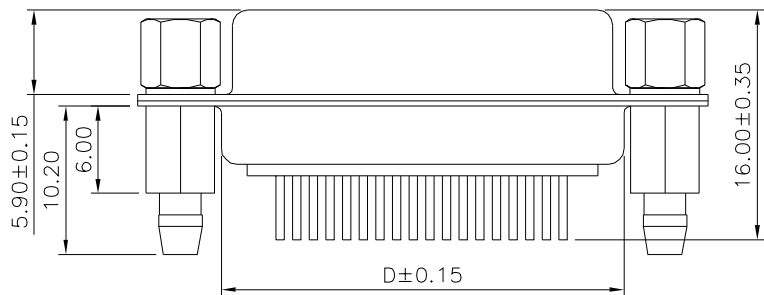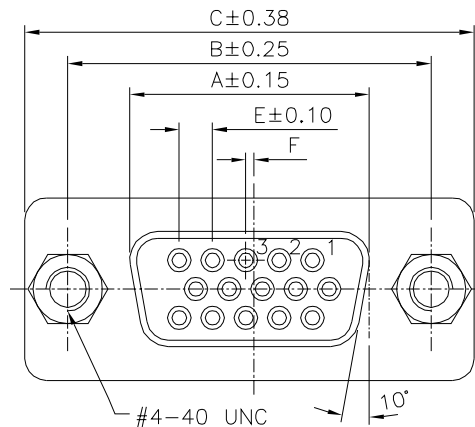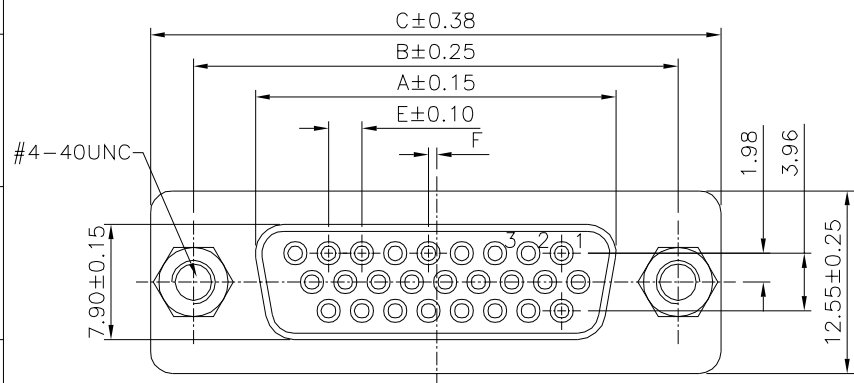

Item No.	PIN
10959	15
22469	26

Pin	A	B	C	D	E	F
15	16.33	24.99	30.81	19.20	2.29	0.25
26	24.80	33.32	39.20	27.70	2.29	0.50
44	38.38	47.04	53.04	41.10	2.29	0.50
62	54.84	63.50	69.40	57.30	2.41	0.60

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 22607





APPROVED BY
 MEI
 CHECKED BY
 HZF
 DRAWING BY
 CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38 .X* ±3*
 .XX ±0.25 .XX* ±1*
 .XXX ±0.10 .XXX* ±0.5*

SCALE NONE REV. B0

UNIT mm

NO. REV. BO NEW RELEASE HZF 02/15/2023
 REVISIONS CHK DATE

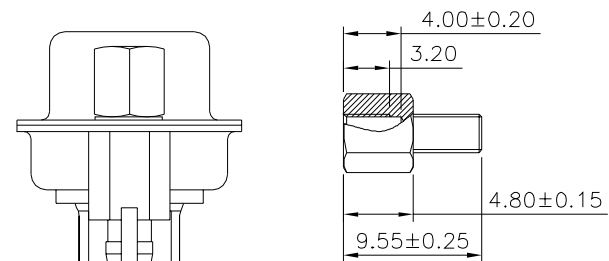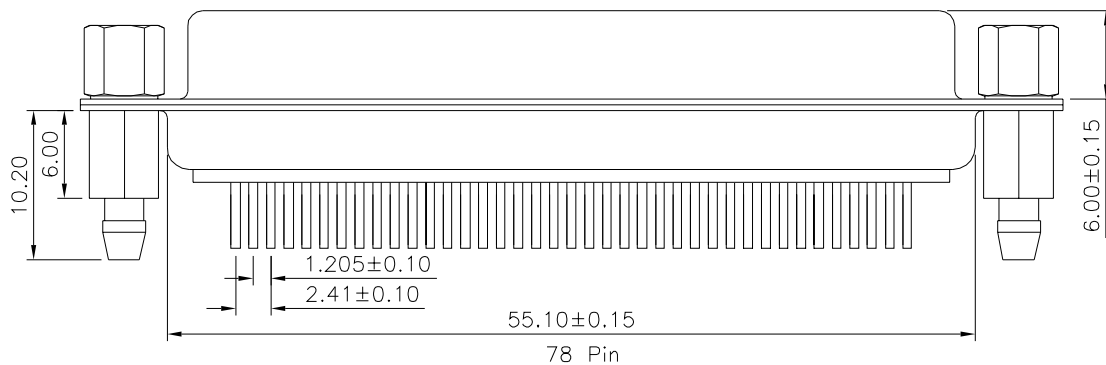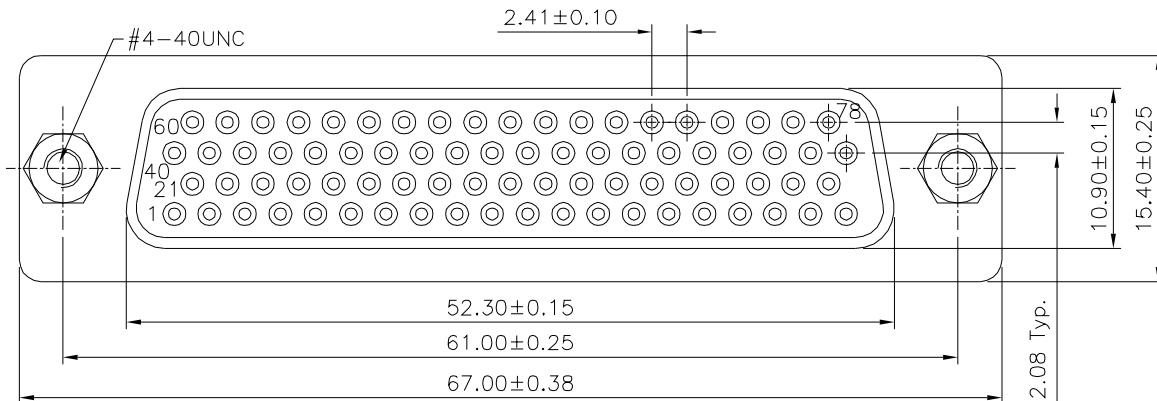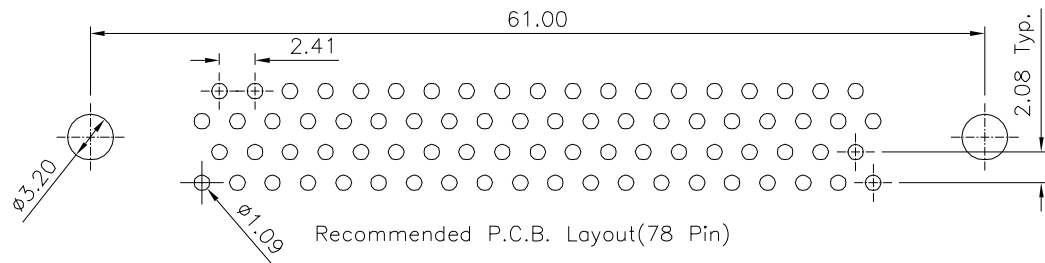

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22607

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

B0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.38 .X* ±3*
.XX ±0.25 .XX* ±1*
.XXX ±0.10 .XXX* ±0.5*

UNIT mm



NO. REV.

B0 NEW RELEASE

REVISIONS

HZF

CHK

02/15/2023

DATE