
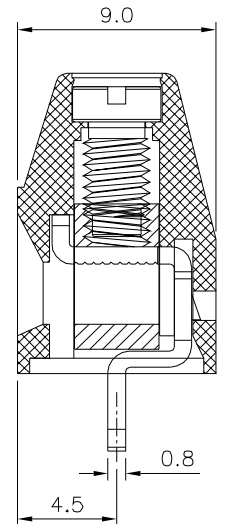
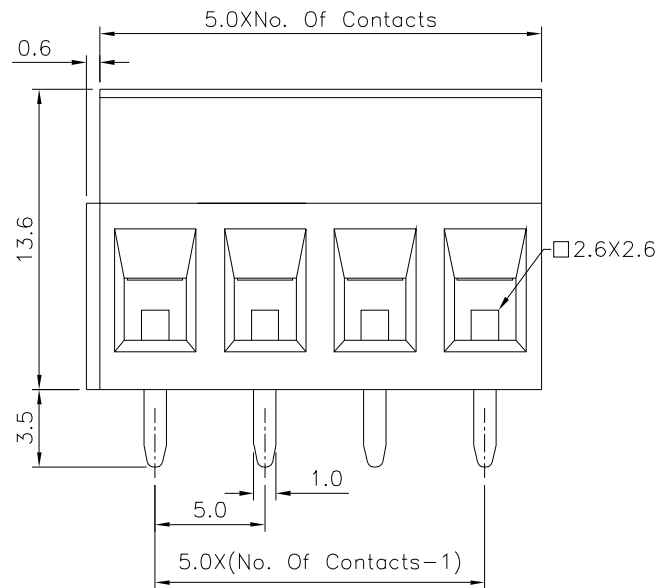


Recommended P.C.B. Layout

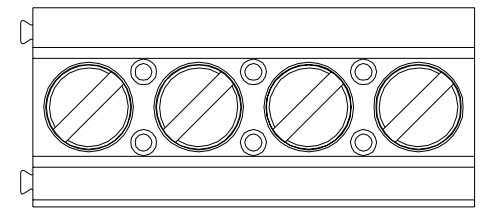

**SPECIFICATION**

Voltage Rating:300V AC  
 Current Rating:16 Amps/Way Max.  
 Contact Resistance:20 Milliohms Max.  
 Withstanding Voltage:2500V AC(1 Minute)  
 Test Time=60s/PCS  
 Wire Range:12~30 AWG  
 Torque:4.5 Kgf.cm/M3  
 Operation Temperature:-40°C~+105°C  
 Soldering Reliability:250°C±10°C/5s Max.  
 Contact(Metal Housing):Copper Alloy,Nickel Plated  
 Terminal Screw:Steel,Galvanized With Cr3+ Plated  
 Solder Pin:Copper Alloy,Tin Plated  
 Insulator Body(Housing):Polyamide(UL94V-0),Green  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 X.° ±1°
22736		MEI		
		CHECKED BY		
HZF		DRAWING BY		
CYP		A0		UNIT
SCALE	NONE	REV.	A0	mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	08/17/2015