

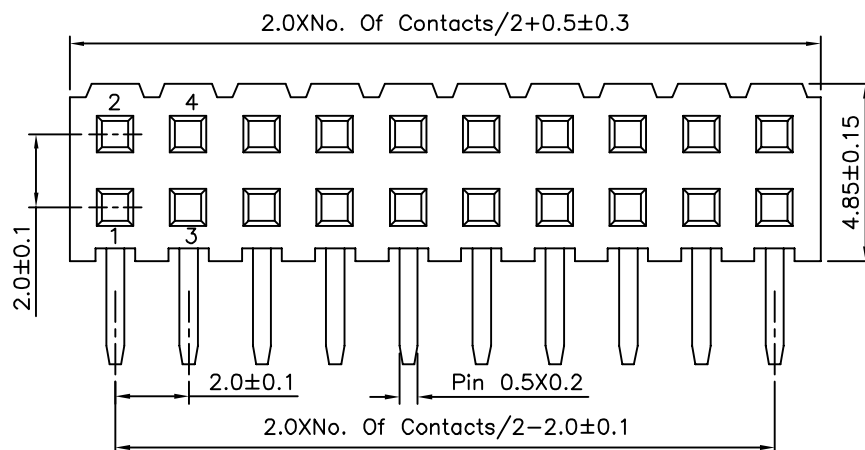


Recommended P.C.B. Layout

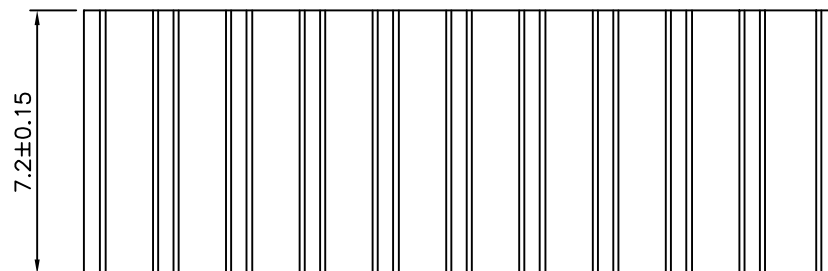

SPECIFICATION

Current Rating:1.5 Amp
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Plated Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

00385

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
>80 ±1.20
25~80 ±0.15
5~25 ±0.10
<5 ±0.05
ANG. ±0.03°

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

△ A0

NEW RELEASE

HZF

12/25/2012