

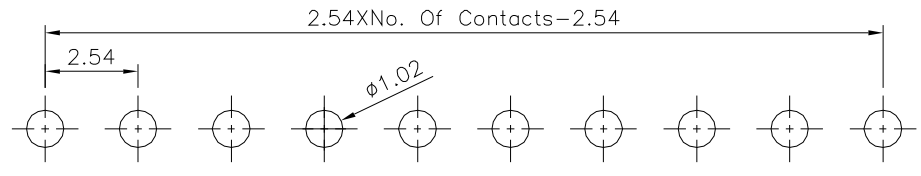
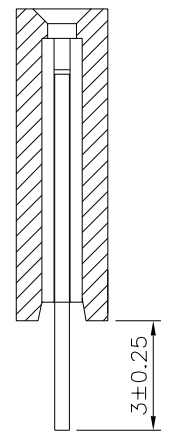


SPECIFICATION

Current Rating: 3 Amps
 ⚠️ Withstand Voltage: 1000V AC Min./Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -40°C ~ +105°C
 Contact: Brass, Gold Flash Over Nickel
 Insulator: PA6T(UL94V-0), Black
 RoHS Compliant

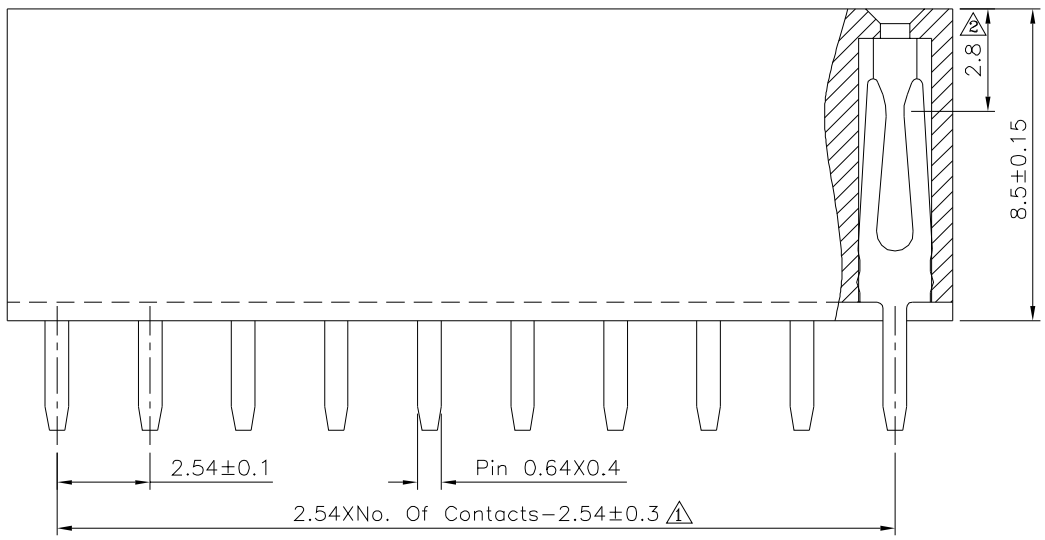

⚠️ Recommended P.C.B. Layout (Top View)
 (PCB Board Tolerance ±0.05)

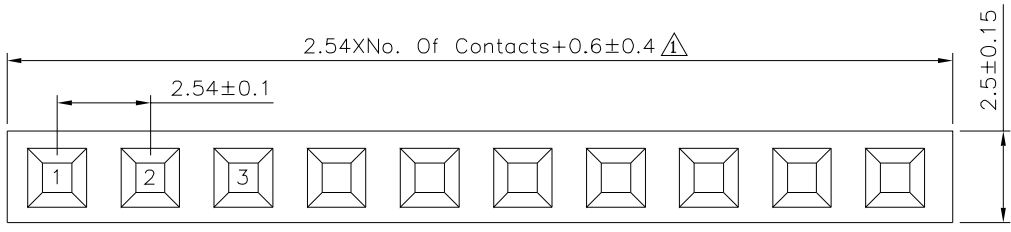

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2° .X ±0.20 .X.* ±1.5° .XX ±0.15 .XX.* ±1° .XXX ±0.10 .XXX.* ±0.5°
00540		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		SAN		
SCALE	NONE	REV.	A2	NO. REV.

⚠️ A2	Modify Data	HZF	11/06/2021	
⚠️ A1	Modify Data	HZF	05/28/2014	
⚠️ A0	NEW RELEASE	HZF	04/04/2013	
NO. REV.	REVISIONS	CHK	DATE	