

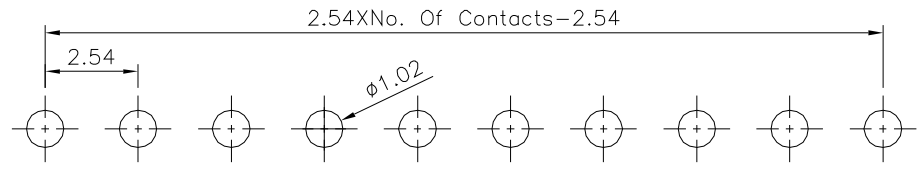
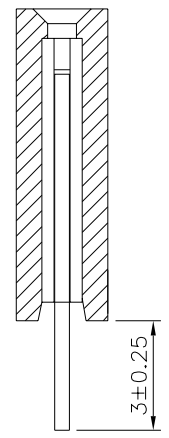


SPECIFICATION

Current Rating: 3 Amps
 ⚠️ Withstand Voltage: 1000V AC Min./Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -40°C ~ +105°C
 Contact: Brass, Gold Flash Over Nickel
 Insulator: PA6T(UL94V-0), Black
 RoHS Compliant

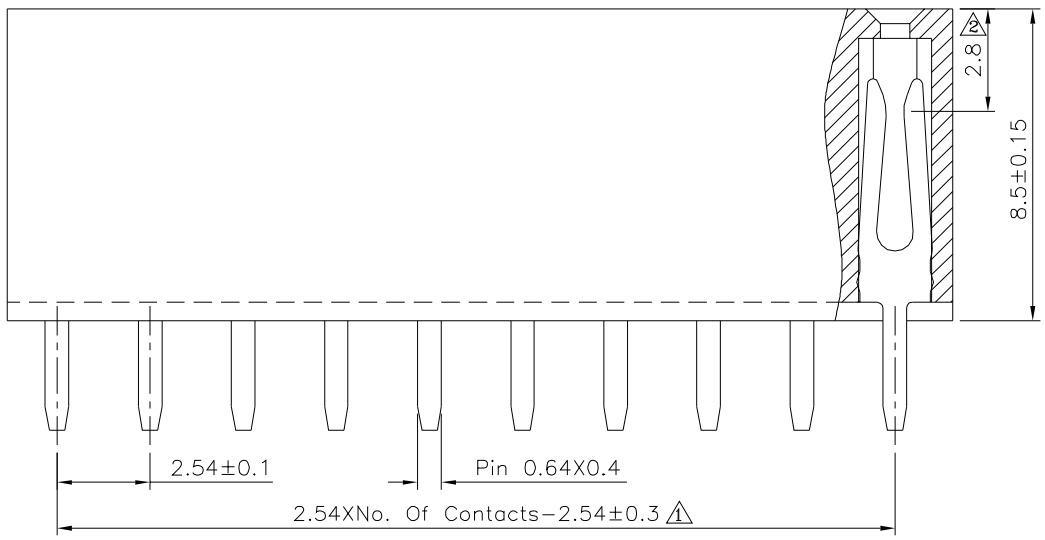

⚠️ Recommended P.C.B. Layout (Top View)
 (PCB Board Tolerance ±0.05)

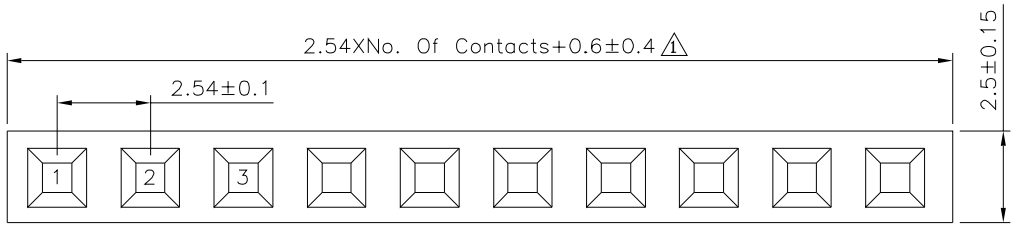

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE				
00550		EMILY			⚠️ A2	Modify Data	HZF	11/06/2021
		CHECKED BY						
		HZF		⚠️ A1	Modify Data	HZF	05/28/2014	
		DRAWING BY		⚠️ A0	NEW RELEASE	HZF	04/04/2013	
		SAN						
SCALE	NONE	REV.	A2	UNIT				
				mm				

NO.	REV.	REVISIONS	CHK	DATE