
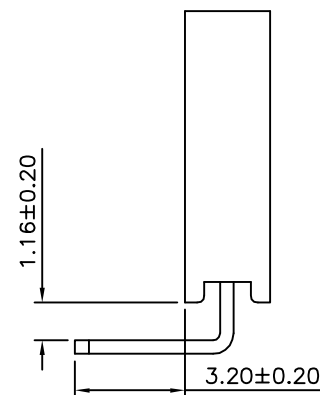
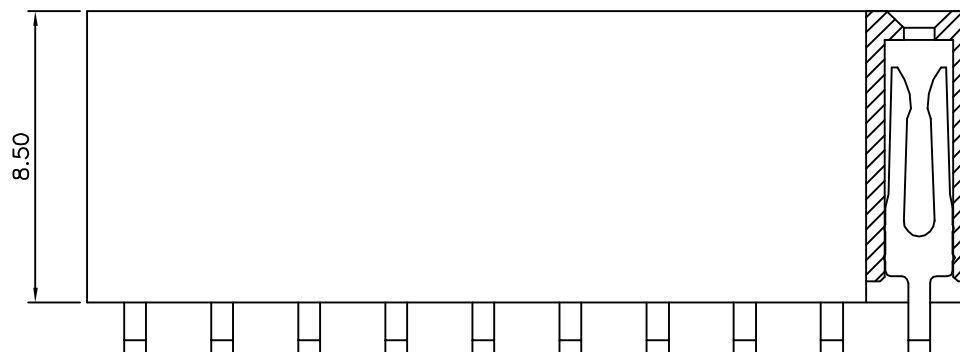


SPECIFICATION

Current Rating:3.0 Amps/Contact Max.
 Withstand Voltage:1000V AC/Minute
 Contact Resistance:20 Milliohms/Contact
 Insulation Resistance:1000 Megaohms At 100V
 Operating Temperature:-55°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 RoHS Compliant

Recommended P.C.B. Layout

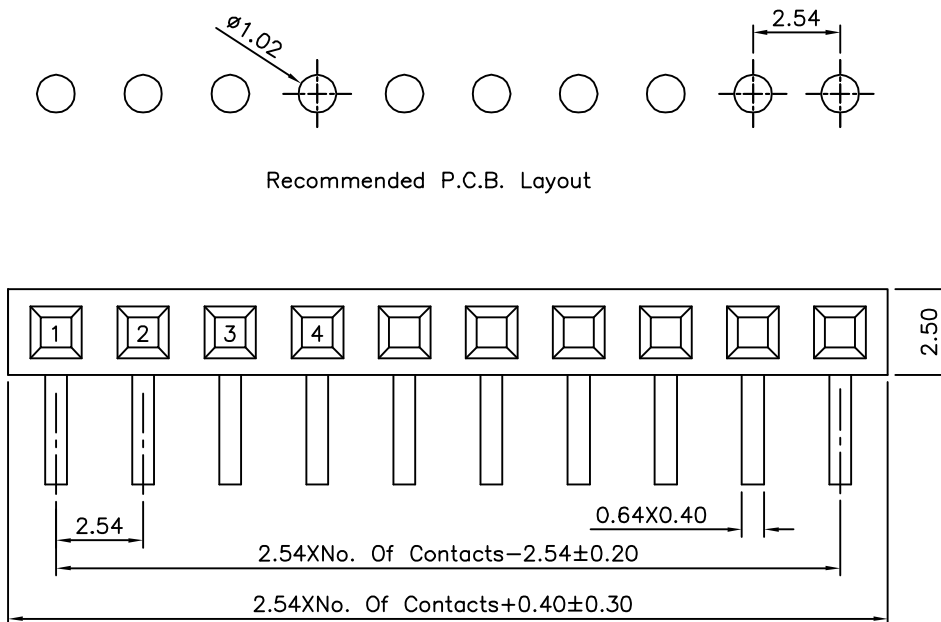

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

00628

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ± 0.50
 XX ± 0.30
 XXX ± 0.20
 ANG. $\pm 5^\circ$

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

AO

NEW RELEASE

HZF

06/04/2013