


SPECIFICATION

- Current Rating:3.0 Amp
- Withstand Voltage:1000V AC/DC
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:-40°C~+105°C
- Insulator:PA9T+30%G.F.(UL94V-0),Black
- Contact:Brass,Gold Plated Over Nickel
- RoHS Compliant

Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)

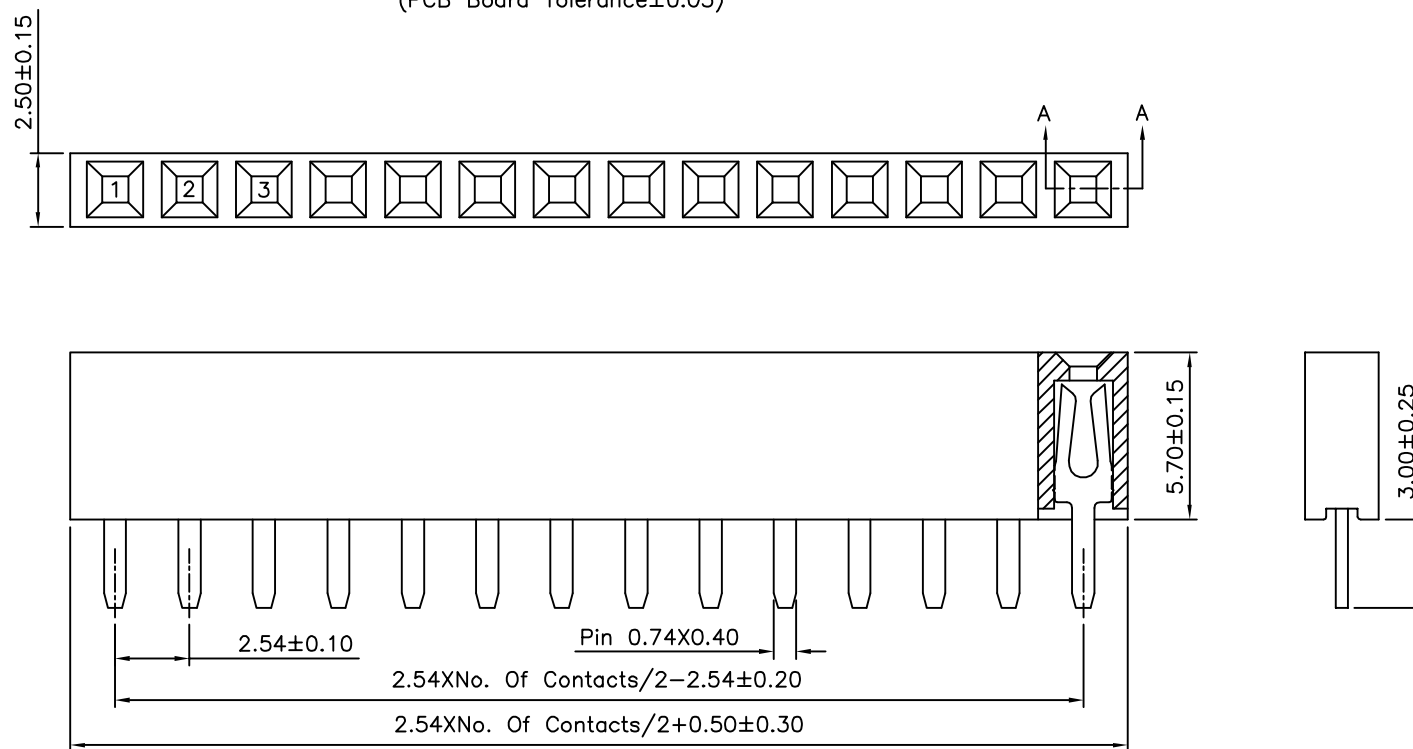

Section A-A

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

00733

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


.X ±0.40

.XX ±0.25

.XXX ±0.15

ANG. ±3°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△ A1	Modify Data	HZF	09/08/2012	
△ A0	NEW RELEASE	HZF	03/15/2009	