


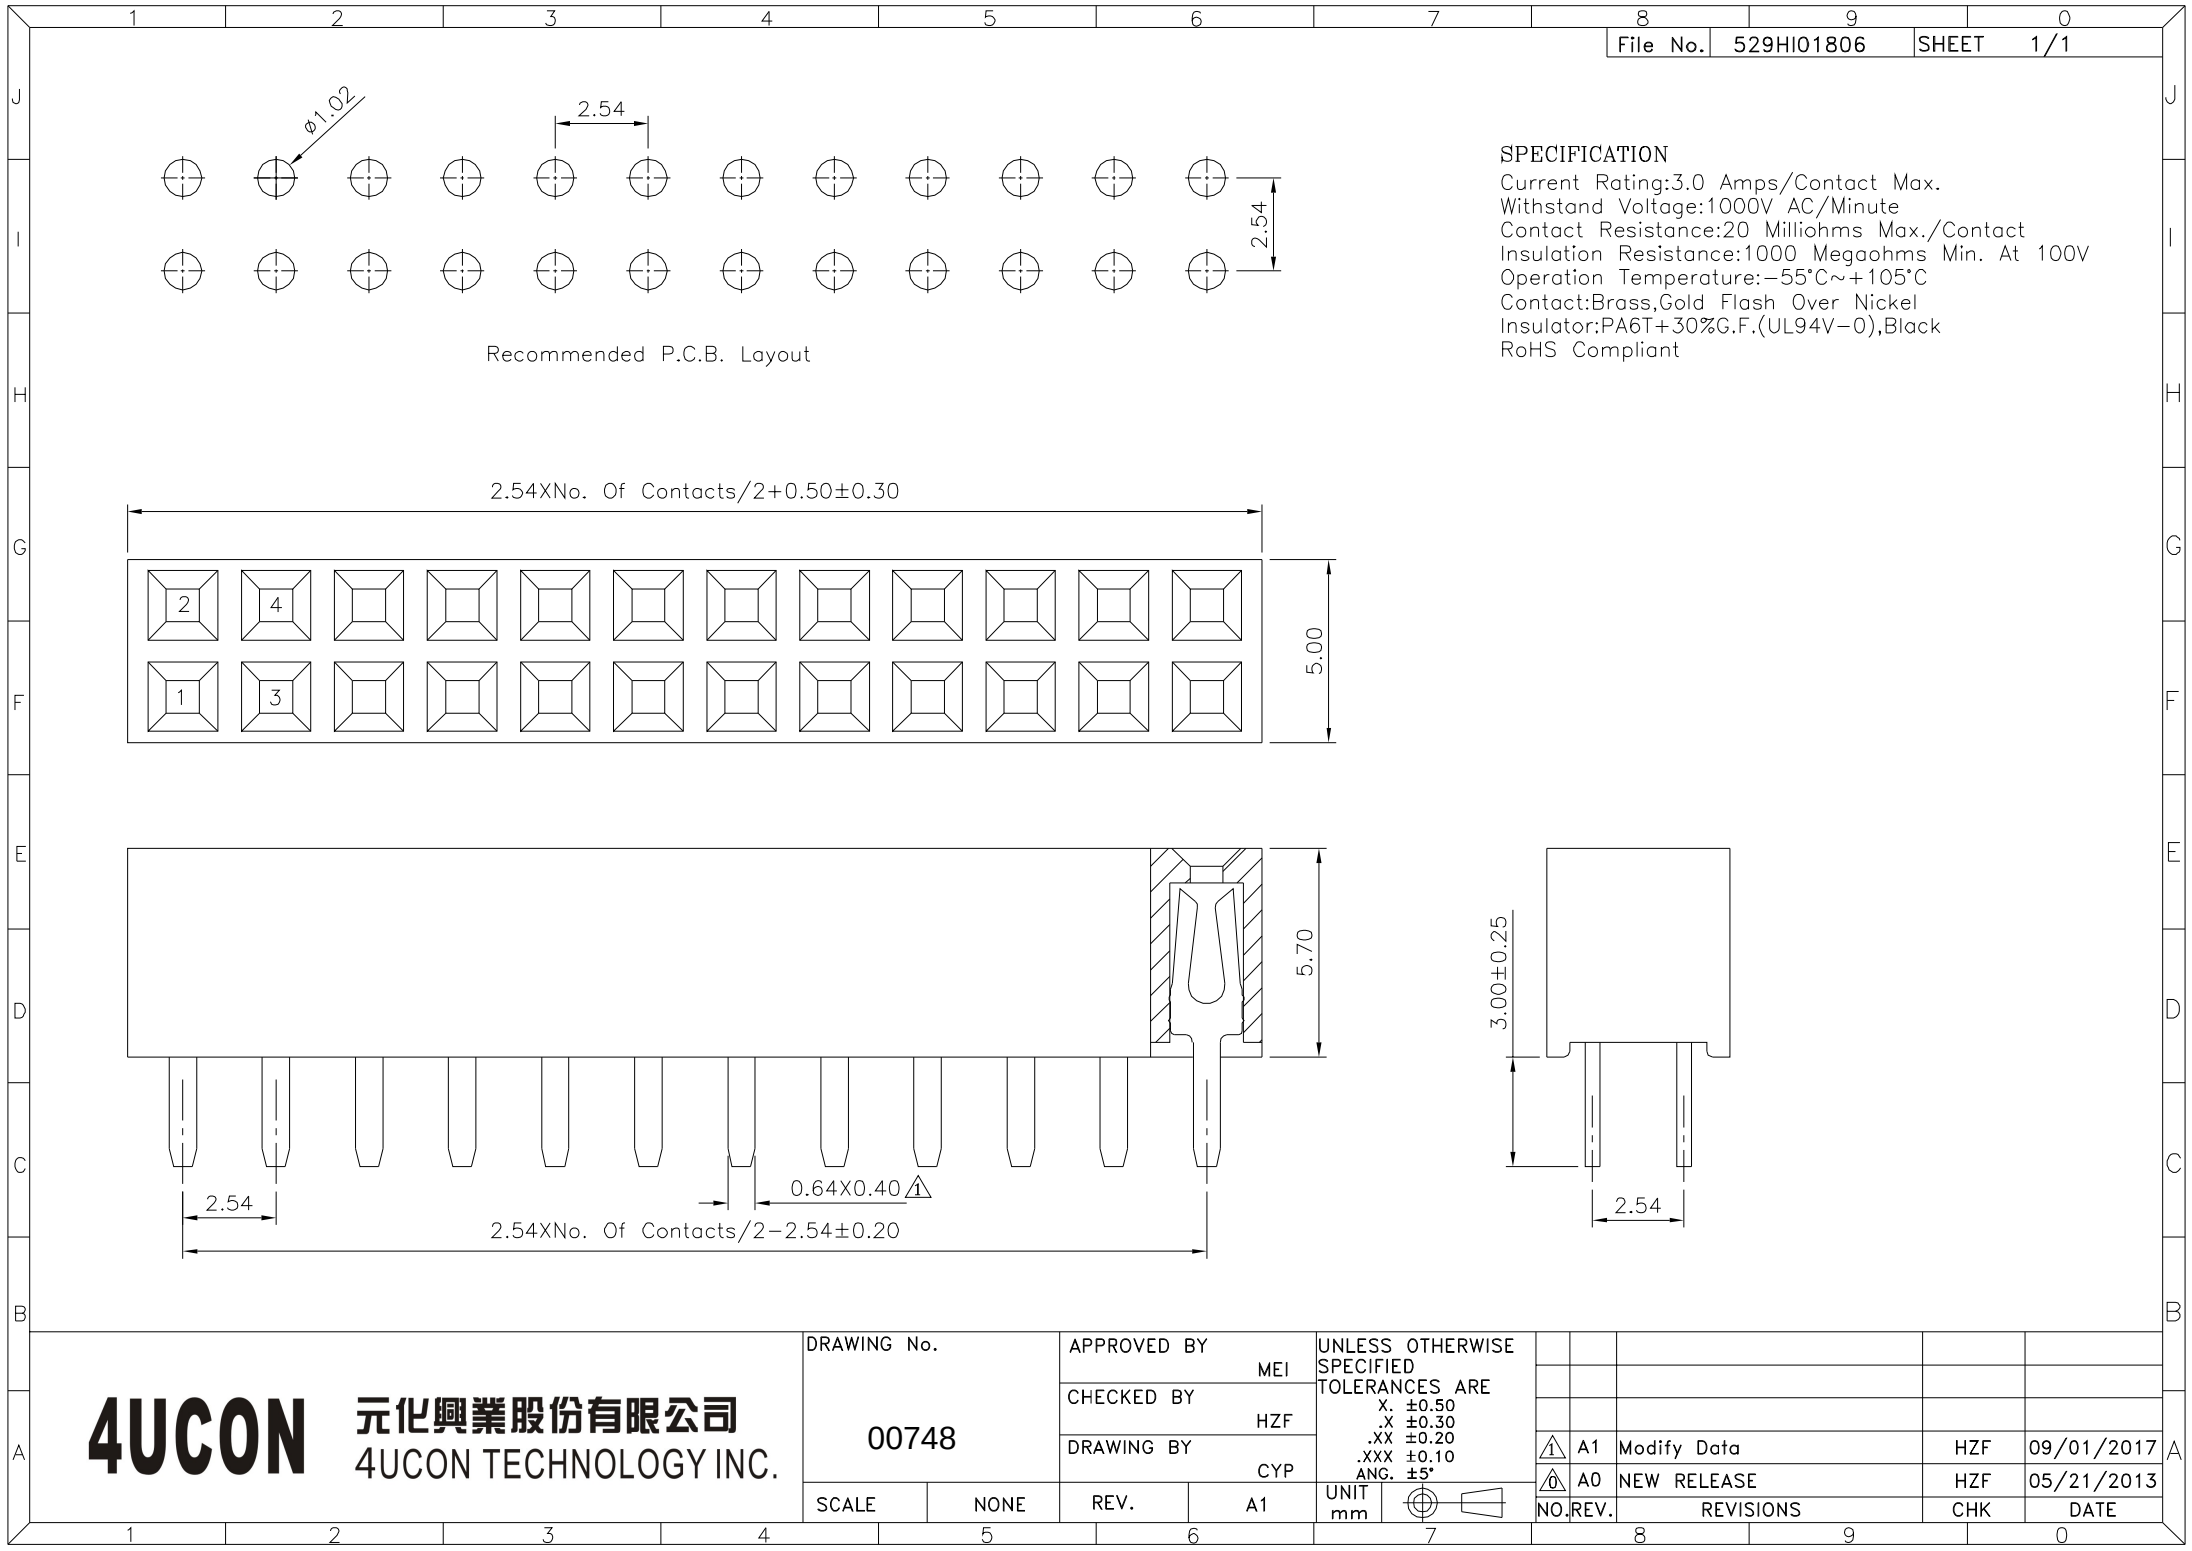

SPECIFICATION

Current Rating:3.0 Amps/Contact Max.
Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Temperature: $-55^\circ\text{C}\sim+105^\circ\text{C}$
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

Recommended P.C.B. Layout

$2.54 \times \text{No. Of Contacts} / 2 + 0.50 \pm 0.30$

5.00

5.70

0.64×0.40

$2.54 \times \text{No. Of Contacts} / 2 - 2.54 \pm 0.20$

3.00 ± 0.25

2.54

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

00748

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.50
.XX ± 0.30
.XXX ± 0.20
ANG. $\pm 5^\circ$

UNIT
mm



A1

Modify Data

HZF

09/01/2017

A0

NEW RELEASE

HZF

05/21/2013

NO. REV.

REVISIONS

CHK

DATE