


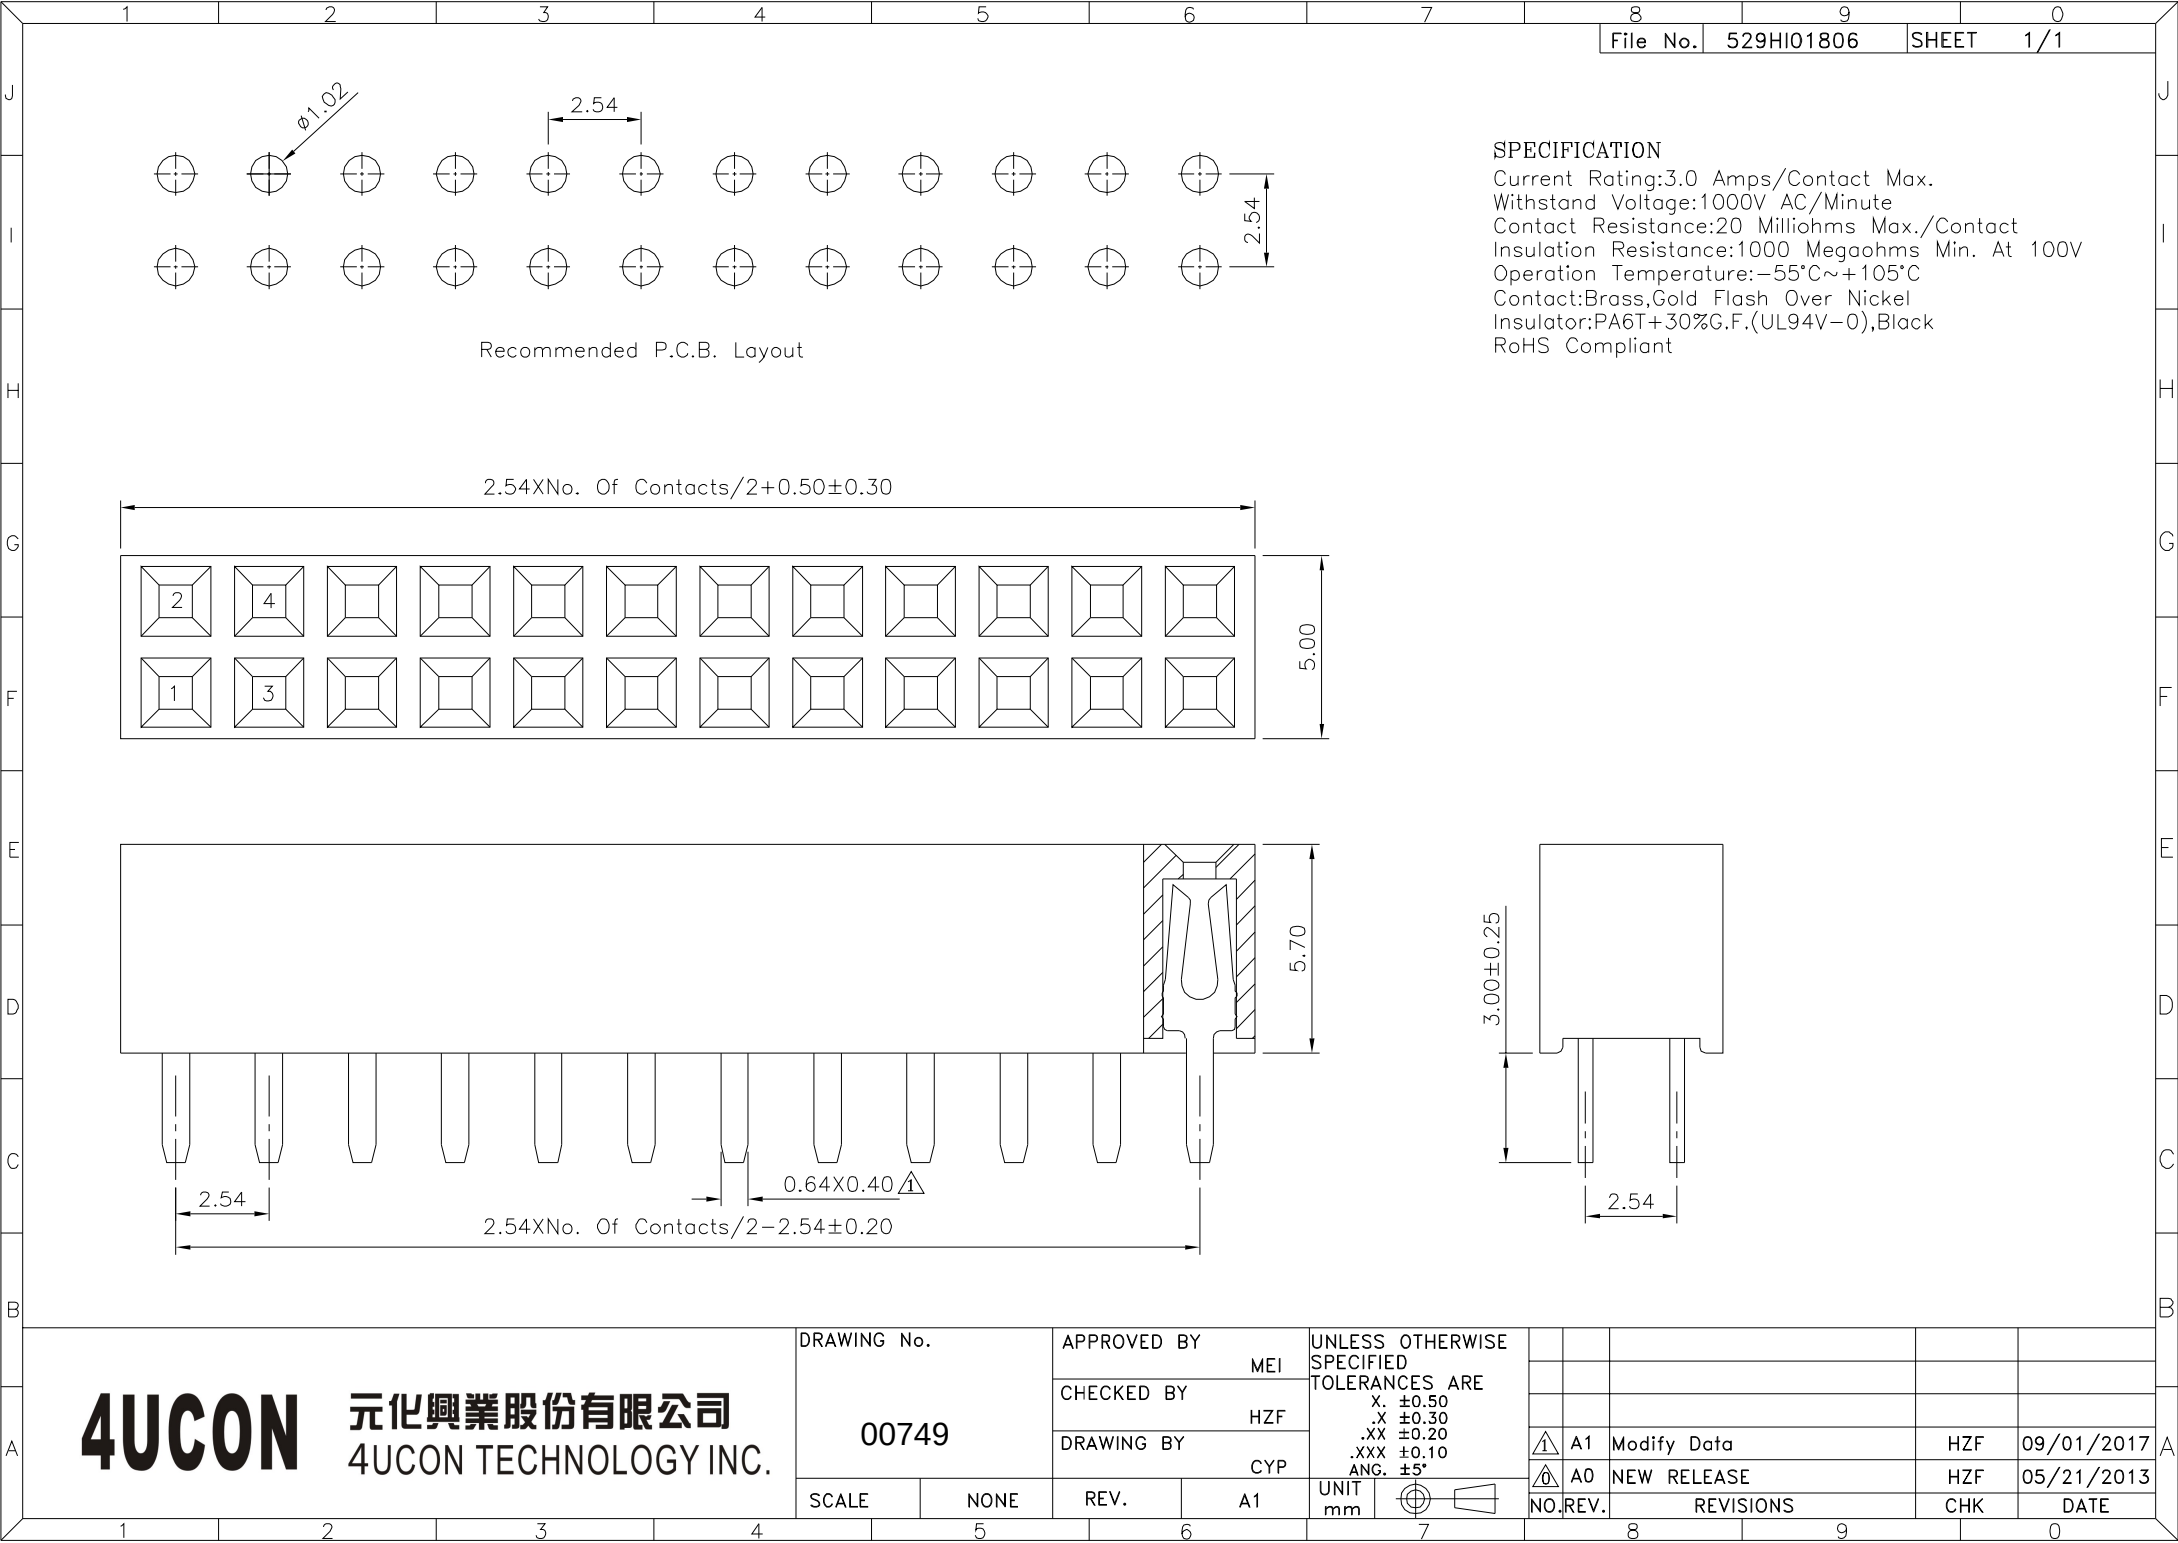

SPECIFICATION
Current Rating:3.0 Amps/Contact Max.
Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Temperature:-55°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	
00749		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		UNIT	mm
		X. ±0.50	
		.X ±0.30	
		.XX ±0.20	
		.XXX ±0.10	
		ANG. ±5°	

NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify Data	HZF	09/01/2017
△	A0	NEW RELEASE	HZF	05/21/2013