

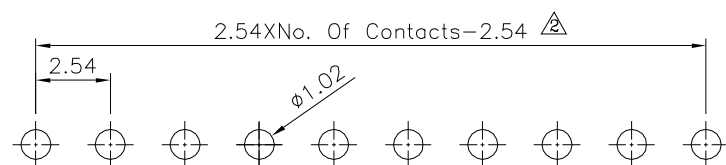
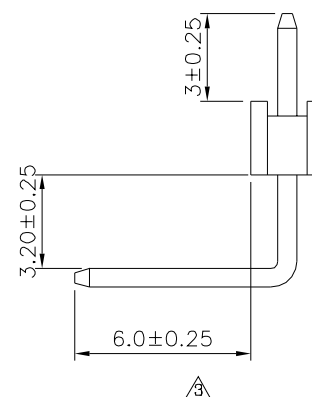


SPECIFICATION

Current Rating:3 Amp
Withstanding Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PBT(UL94V-0),Black
RoHS Compliant

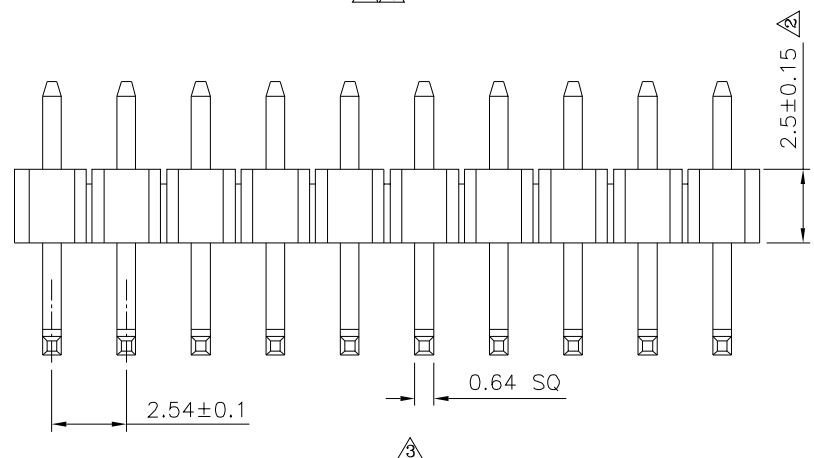

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

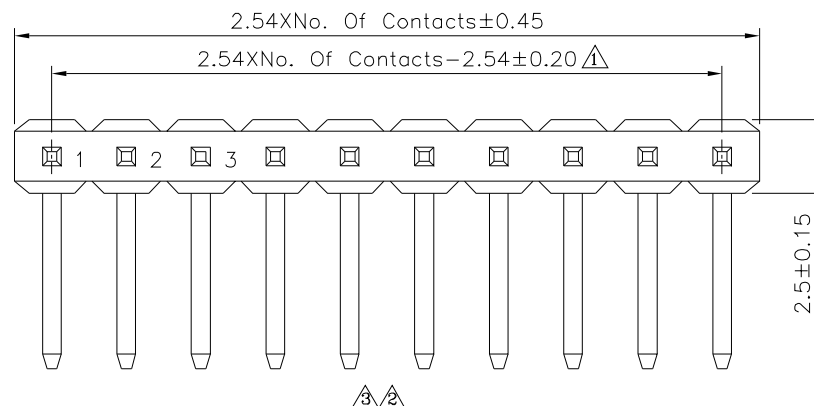

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

00837

SCALE	NONE
-------	------

NONE

APPROVED BY

ME

CHECKED BY

HZI

DRAWING BY

CY


REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

	X. ± 0.25	X.* $\pm 2^\circ$
	.X ± 0.20	.X* $\pm 1.5^\circ$
	.XX ± 0.15	.XX* $\pm 1^\circ$
	.XXX ± 0.10	.XXX* $\pm 0.5^\circ$

UNIT	mm
------	----



	A3

5.		A2
----	---	----

5.		A1
		A2

0	AO
NO.	REV

	Modify
--	--------

Modify	
--------	--

Modify
NEW DS

NEW RE
.

Data

Data

Data

REVISIONS

HZF

HZF

HZF
HZF

HZF
CHK

	02/09/2017
--	------------

02/21/2014

02/22/2011
12/22/2000

12/09/2009
DATE