




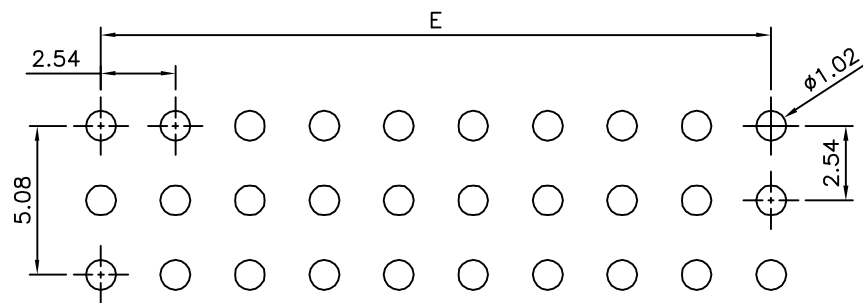


△ Recommended P.C.B. Layout

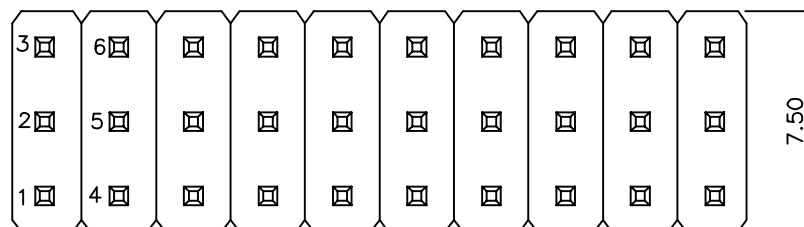

△

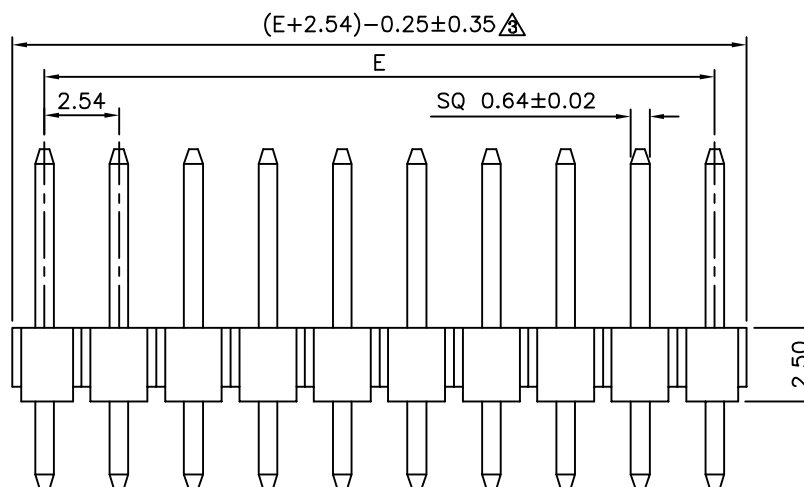

△

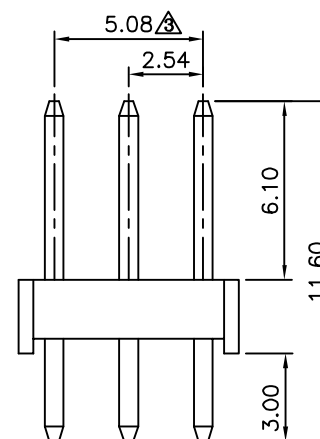

△

# △ SPECIFICATION

Current Rating:3 Amp  
Withstanding Voltage:500V AC For One Minute  
Contact Resistance:20 Milliohms Max.  
At DC 100mA  
Insulation Resistance:5000 Megaohms Min.  
At DC 500V  
Operation Temperature:-40°C~+105°C  
Insulator:PBT+30%G.F.(UL94V-0),Black  
△ Contact:Brass,Gold Flash Over Nickel  
RoHS Compliant

| Pin | E     | Pin | E     |
|-----|-------|-----|-------|
| 6   | 2.54  | 63  | 50.80 |
| 9   | 5.08  | 66  | 53.34 |
| 12  | 7.62  | 69  | 55.88 |
| 15  | 10.16 | 72  | 58.42 |
| 18  | 12.70 | 75  | 60.96 |
| 21  | 15.24 | 78  | 63.50 |
| 24  | 17.78 | 81  | 66.04 |
| 27  | 20.32 | 84  | 68.58 |
| 30  | 22.86 | 87  | 71.12 |
| 33  | 25.40 | 90  | 73.66 |
| 36  | 27.94 | 93  | 76.20 |
| 39  | 30.48 | 96  | 78.74 |
| 42  | 33.02 | 99  | 81.28 |
| 45  | 35.56 | 102 | 83.82 |
| 48  | 38.10 | 105 | 86.36 |
| 51  | 40.64 | 108 | 88.90 |
| 54  | 43.18 | 111 | 91.44 |
| 57  | 45.72 | 114 | 93.98 |
| 60  | 48.26 | 117 | 96.52 |
|     |       | 120 | 99.06 |

DRAWING No.

01056

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


YBL

REV.

A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.30  
 .XX ±0.20  
 ANG. ±3°

UNIT mm



|     |      |             |     |            |
|-----|------|-------------|-----|------------|
|     |      |             |     |            |
| 3   | A3   | Modify Data | HZF | 01/17/2014 |
| 2   | A2   | Modify Data | HZF | 05/24/2012 |
| 1   | A1   | Modify Data | HZF | 05/05/2010 |
| 0   | A0   | NEW RELEASE |     |            |
| NO. | REV. | REVISIONS   | CHK | DATE       |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.