
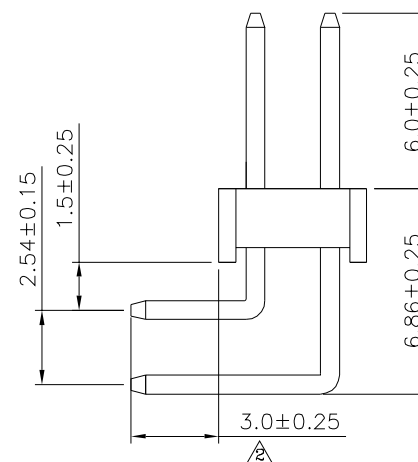
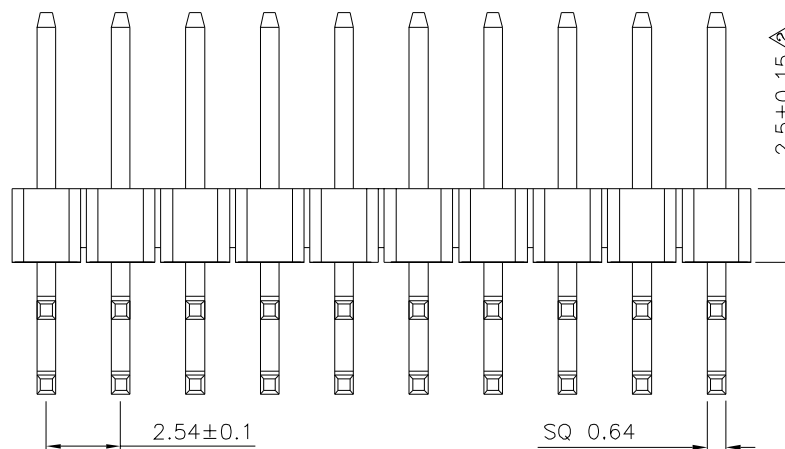


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

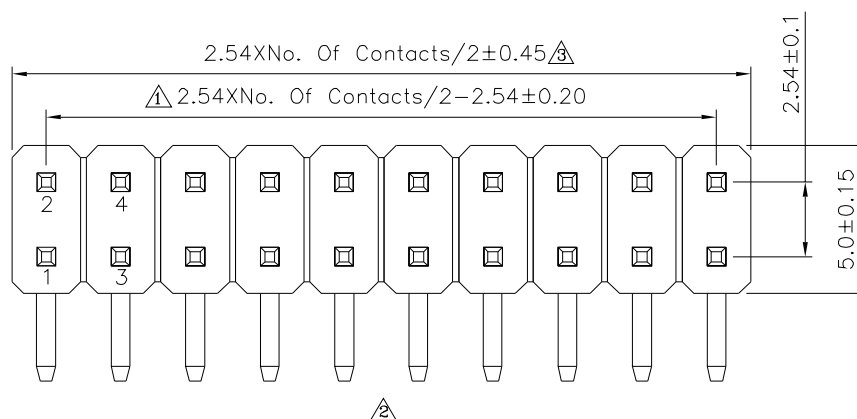

SPECIFICATION
Current Rating: 3 Amp
Withstanding Voltage: 1000V AC
Contact Resistance: 20 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Contact: Brass, Gold Flash Over Nickel
Insulator: PBT(UL94V-0), Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

01095

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO


REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

$\Delta X. \pm 0.25$ $X.* \pm 2*$
 $.X \pm 0.20$ $.X* \pm 1.5*$
 $.XX \pm 0.15$ $.XX* \pm 1*$
 $.XXX \pm 0.10$ $.XXX* \pm 0.5*$

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
	A3	Modify Data	HZF	01/06/2017
	A2	Modify Data	HZF	07/09/2015
	A1	Modify Data	HZF	02/22/2011
	A0	NEW RELEASE	HZF	12/09/2009