

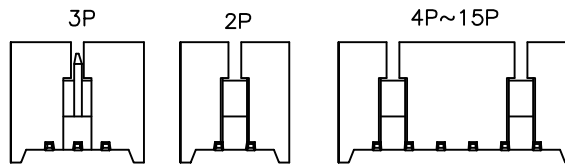
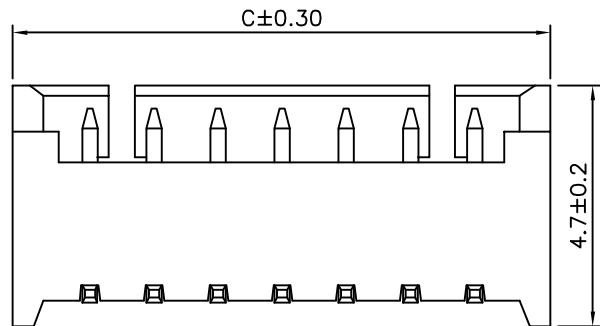


⚠ Recommended P.C.B. Layout
(PCB Board Tolerance ± 0.05)

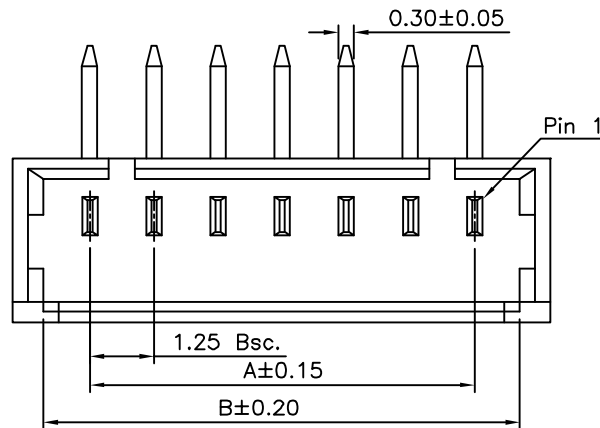

1 Lock Window View

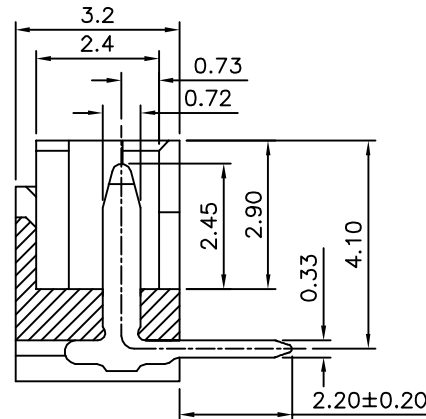

1

△ SPECIFICATION

Current Rating:1A
Voltage Rating:125V AC
Dielectric Voltage:250V AC For One Minute
Contact Resistance:20 Milliohms Max.(Initial)
40 Milliohms Max.(Final)
Insulation Resistance:100 Megaohms Min. At 500V
Operation Temperature:-25°C~+85°C
Insulator:PA46(UL94V-0),Nature
Contact:Brass,Tin Plated Over Nickel
RoHS Compliant

Pin	A	B	C
02	1.25	3.05	4.25
03	2.50	4.30	5.50
04	3.75	5.55	6.75
05	5.00	6.80	8.00
06	6.25	8.05	9.25
07	7.50	9.30	10.50
08	8.75	10.55	11.75
09	10.00	11.80	13.00
10	11.25	13.05	14.25
11	12.50	14.30	15.50
12	13.75	15.55	16.75
13	15.00	16.80	18.00
14	16.25	18.05	19.25
15	17.50	19.30	20.50

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

01214

SCALE	NONE
-------	------

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL	
-----	--

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	.X	± 0.25
	.XX	± 0.15

UNIT



1

B1	Modify Data
----	-------------



BO	NEW RELEASE
----	-------------

NO.	REV.
-----	------

REVISIONS

CHK

DATE _____