




Recommended P.C.Board Layout

△ SPECIFICATION
 Current Rating:1A AC/DC
 Voltage Rating:125V AC/DC
 Withstand Voltage:250V AC For 1 Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:100 Megaohms Min.
 Operation Temperature:-40°C~+85°C
 Insulator:PA46(UL94V-0)
 Contact:Brass,Tin Plated Over Nickel
 RoHS Compliant

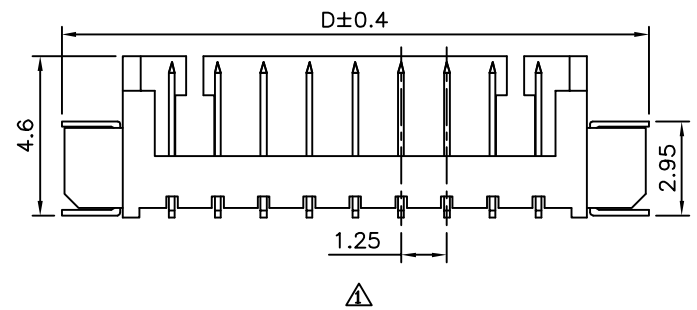

△

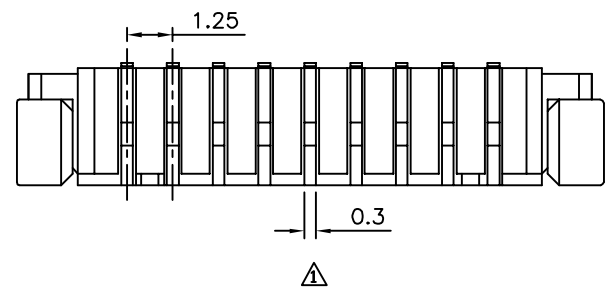

△


△

Pin	A	B	C	D
2	1.25	3.05	4.25	7.65
3	2.50	4.30	5.50	8.90
4	3.75	5.55	6.75	10.15
5	5.00	6.80	8.00	11.40
6	6.25	8.05	9.25	12.65
7	7.50	9.30	10.50	13.90
8	8.75	10.55	11.75	15.15
9	10.00	11.80	13.00	16.40
10	11.25	13.05	14.25	17.65
11	12.50	14.30	15.50	18.90
12	13.75	15.55	16.75	20.15
13	15.00	16.80	18.00	21.40
14	16.25	18.05	19.25	22.65
15	17.50	19.30	20.50	23.90



4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.25 .XX ±0.15 ANG.
01225		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		HTP		
SCALE	NONE	REV.	A1	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	04/02/2012
△ A0		NEW RELEASE	MEI	12/06/2005

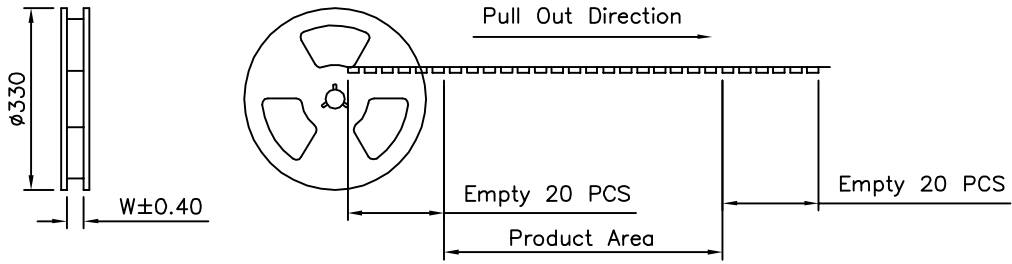

SPECIFICATION
 Q'ty:1000 PCS/Reel
 RoHS Compliant

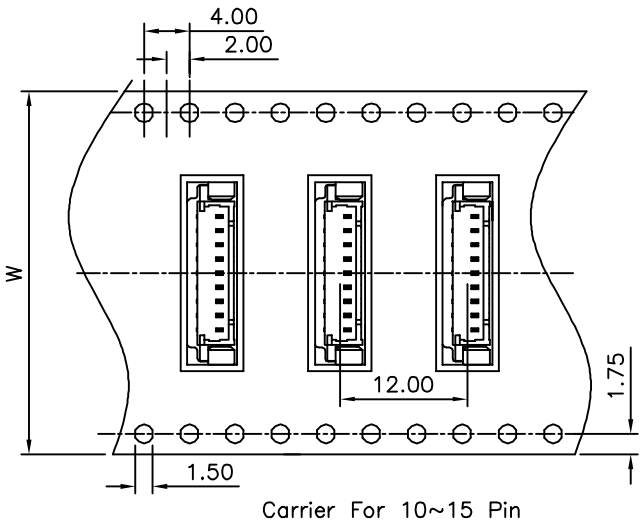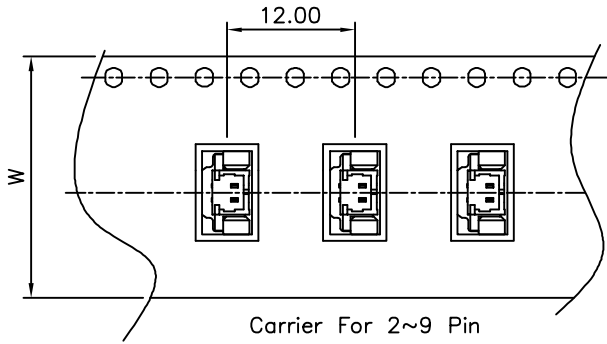

Pin	W
2	16.0
3	
4	
5	24.0
6	
7	
8	
9	32.0
10	
11	
12	44.0
13	
14	
15	

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.25 .XX ±0.15 ANG.
01225		EMILY		
		CHECKED BY		
		HZF		UNIT mm
		DRAWING BY		
		HTP		NO. REV.
SCALE	NONE	REV.	A1	
				REVISIONS
				CHK
				DATE

△ A1	Modify Data	HZF	04/02/2012
△ A0	NEW RELEASE	MEI	12/06/2005