



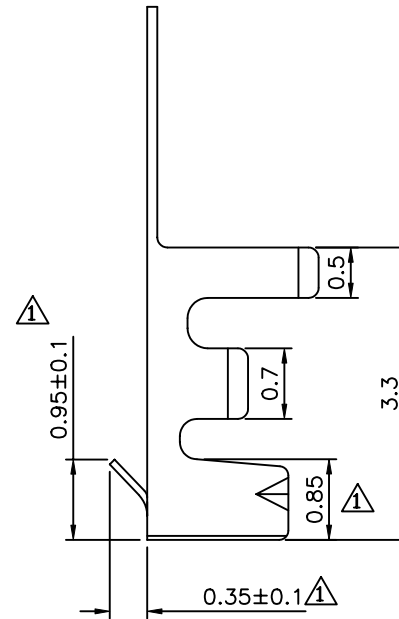


△ SPECIFICATION
 Current Rating:1A AC/DC
 Voltage Rating:125V AC/Max.
 Operation Temperature:-25°C~+85°C
 Insulation Resistance:100 Megaohms Min.
 Dielectric Withstanding Voltage:250V AC/Min.
 Contact Resistance:20 Milliohms Max.
 Terminal:Phosphor Bronze,Tin Plated
 Wire Range:28 To 32AWG
 RoHS Compliant

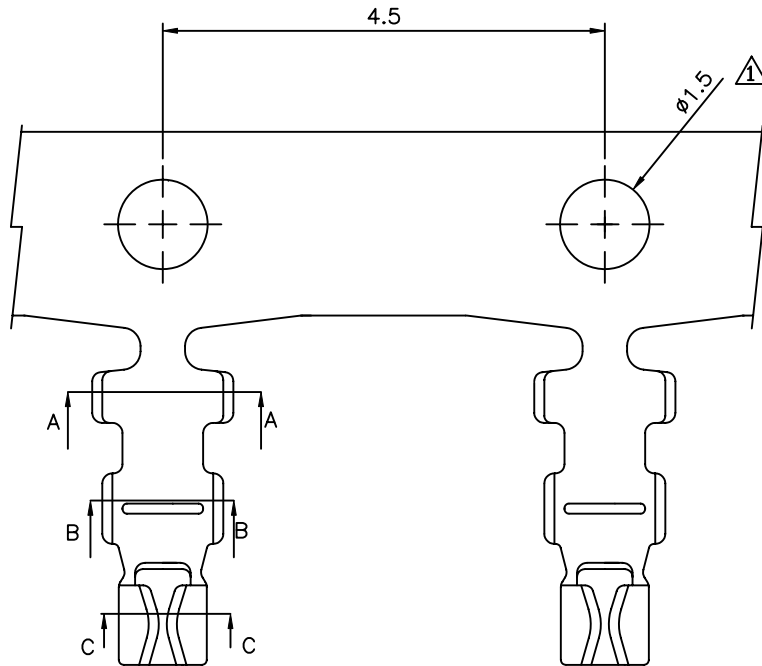

△ FH T-H
 (1) (2) (3)
 (1) FH:1.25 FH
 (2) T:Female Terminal Tin Plated
 (3) H:RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

01281

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LXX

SCALE

NONE

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.50

.XX ±0.10

ANG.

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
2	A2	Modify Data	HZF	12/25/2009
1	A1	UPDATE DRAWING	HZF	10/12/2007
0	A0	NEW RELEASE	RAN	2004/05/14