



△ SPECIFICATION


Current Rating: 3A AC/DC
Voltage Rating: 250V AC/DC
Temperature Range: -25°C~+85°C
Contact Resistance: 10 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
Withstanding Voltage: 1000V AC/Minute
Insulator: PA66(UL94V-0), Nature
RoHS Compliant

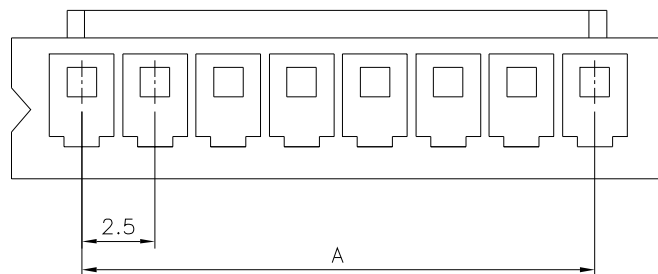



△ 2



△ 2 Pin

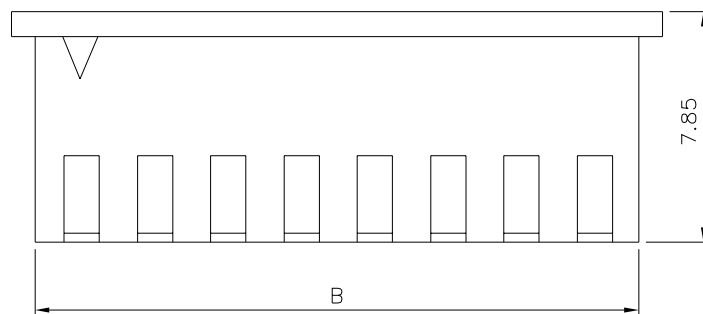

△ 2

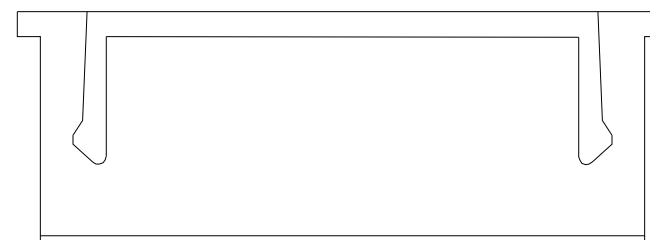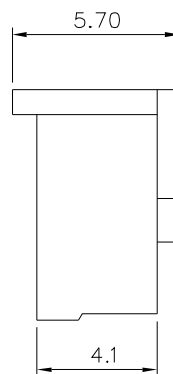

△ 3~20 Pin

Pin	A	B
02	2.50	5.70
03	5.00	8.20
04	7.50	10.70
05	10.00	13.20
06	12.50	15.70
07	15.00	18.20
08	17.50	20.70
09	20.00	23.20
10	22.50	25.70
11	25.00	28.20
12	27.50	30.70
13	30.00	33.20
14	32.50	35.70
15	35.00	38.20
16	37.50	40.70
20	47.50	50.70

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

01589

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

YBL

SCALE

NONE


REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.30 △
.XX ±0.20

UNIT
mm



△ A3

Modify Data

HZF

12/04/2013

△ A2

Modify Data

HZF

03/24/2010

△ A1

Modify Data

BECKY

2004/11/19

△ A0

NEW RELEASE

NO. REV.

REVISIONS

CHK

DATE