

△SPECIFICATION

Current Rating: 3A AC/DC

Voltage Rating: 250V AC/DC

Temperature Range: -25°C~+85°C


Contact Resistance: 10 Milliohms Max.

Insulation Resistance: 1000 Megaohms Min.


Withstanding Voltage: 1000V AC/Minute

Insulator: PA66(UL94V-0),Nature


RoHS Compliant

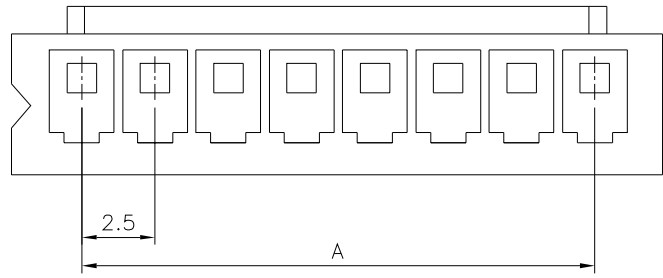



△



△ 2 Pin

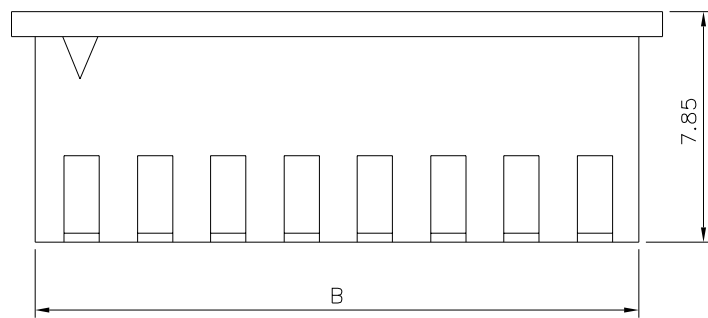

△

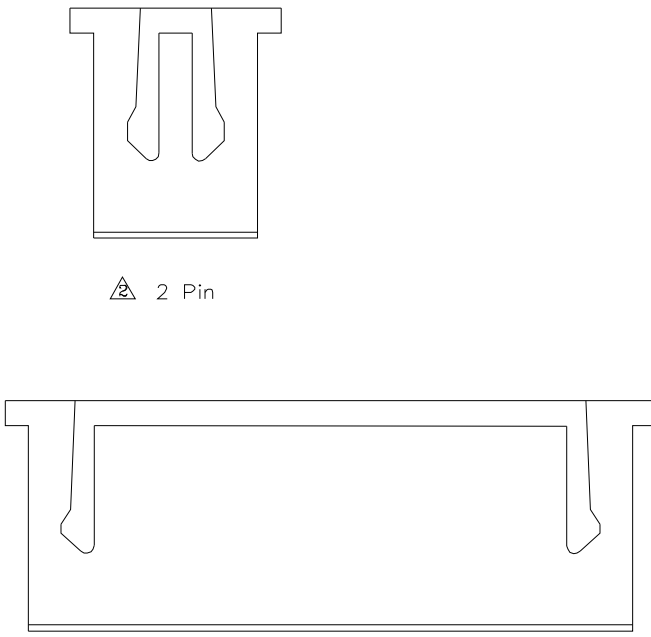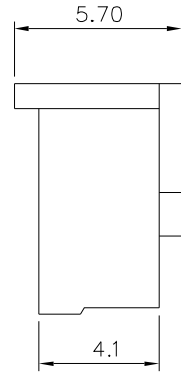

△ 3~20 Pin

Pin	A	B
02	2.50	5.70
03	5.00	8.20
04	7.50	10.70
05	10.00	13.20
06	12.50	15.70
07	15.00	18.20
08	17.50	20.70
09	20.00	23.20
10	22.50	25.70
11	25.00	28.20
12	27.50	30.70
13	30.00	33.20
14	32.50	35.70
15	35.00	38.20
16	37.50	40.70
20	47.50	50.70

4UCON 元化興業股份有限公司

4UCON TECHNOLOGY INC.

DRAWING No. △

01599

SCALE

NONE

APPROVED BY

CHECKED BY

DRAWING BY

MEI

HZF

YBL

A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.30 △

.XX ±0.20

UNIT mm

NO. REV.

REVISIONS

CHK

DATE

△ A3 Modify Data HZF 12/04/2013

△ A2 Modify Data HZF 03/24/2010

△ A1 Modify Data BECKY 2004/11/19

△ A0 NEW RELEASE