




SPECIFICATION




Current Rating: 3A AC/DC
 Voltage Rating: 250V AC Max.
 Operation Temperature: -25°C~+85°C
 Contact Resistance: 10 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Withstanding Voltage: 1000V AC/Minute
 Contact: Brass, Tin Plated
 Insulator: PA66(UL94V-0), White
 RoHS Compliant

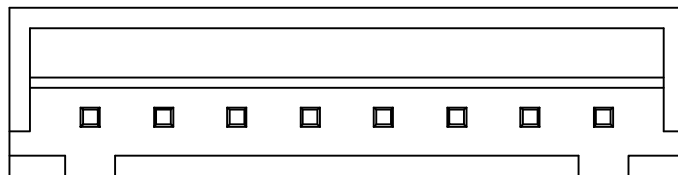

Recommended P.C.B. Layout

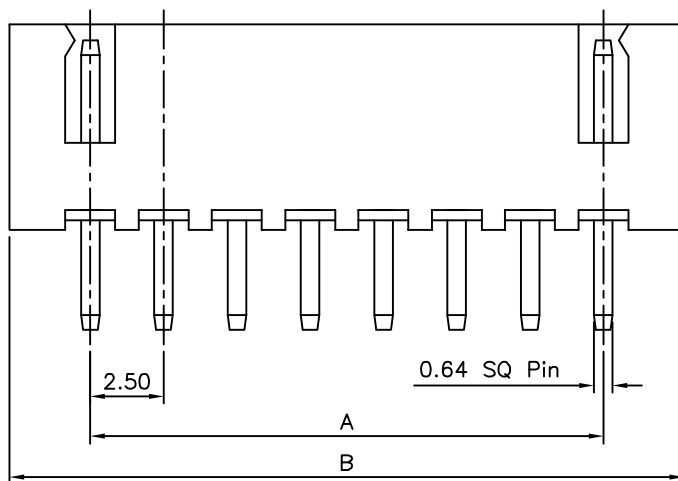

3~20 Pin

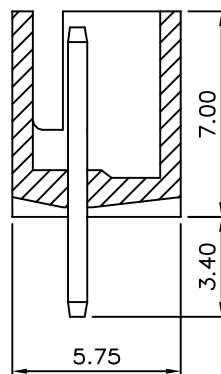

2 Pin

Pin	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50
17	40.00	45.00
18	42.50	47.50
19	45.00	50.00
20	47.50	52.50

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

01605

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.35
 .XX ±0.25
 ANG.


SCALE

NONE

REV.

B0

UNIT
 mm



NO. REV.

NEW RELEASE

REVISIONS

HZF

CHK

08/01/2013

DATE