



# △ SPECIFICATION


Current Rating: 3A AC/DC  
 Voltage Rating: 250V AC Max.  
 Operation Temperature: -25°C~+85°C  
 Contact Resistance: 10 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Withstanding Voltage: 1000V AC/Minute  
 Contact: Brass, Tin Plated  
 Insulator: PA66(UL94V-0), Nature  
 RoHS Compliant




Recommended P.C.B. Layout

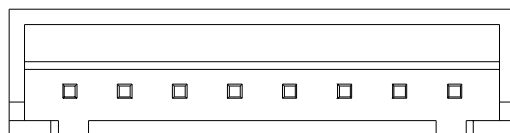


△△

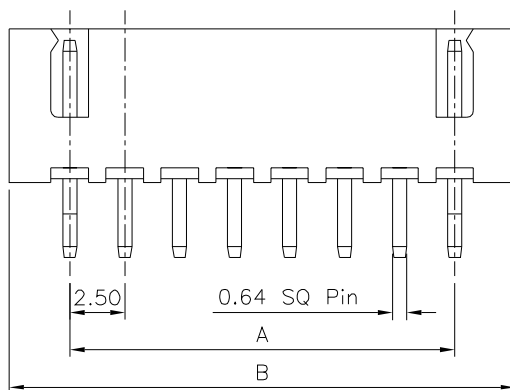


△△ 3~12 Pin

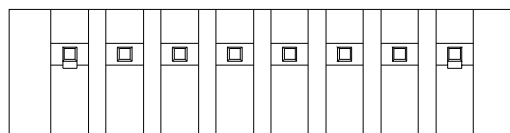


△



△



△△



△△ 2 Pin

△△

| Pin | A     | B     |
|-----|-------|-------|
| 02  | 2.50  | 7.50  |
| 03  | 5.00  | 10.00 |
| 04  | 7.50  | 12.50 |
| 05  | 10.00 | 15.00 |
| 06  | 12.50 | 17.50 |
| 07  | 15.00 | 20.00 |
| 08  | 17.50 | 22.50 |
| 09  | 20.00 | 25.00 |
| 10  | 22.50 | 27.50 |
| 11  | 25.00 | 30.00 |
| 12  | 27.50 | 32.50 |
| 13  | 30.00 | 35.00 |
| 14  | 32.50 | 37.50 |
| 15  | 35.00 | 40.00 |
| 16  | 37.50 | 42.50 |
| 20  | 47.50 | 52.50 |

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

01619

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO

REV.

A2

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE

.X ±0.35

.XX ±0.25

UNIT  
 mm



| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| 3   | A3   | Modify Data | HZF | 03/03/2016 |
| 2   | A2   | Modify Data | HZF | 03/17/2015 |
| 1   | A1   | Modify Data | HZF | 02/23/2011 |
| 0   | A0   | NEW RELEASE | HZF | 08/24/2009 |