




3.2 SPECIFICATION


Current Rating: 3A AC/DC
 Voltage Rating: 250V AC Max.
 Withstanding Voltage: 1000V AC/Minute
 Operation Temperature: -25°C~+85°C
 Contact Resistance: 10 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Contact: Brass, Tin Plated Over Nickel
 Insulator: PA66(UL94V-0), Natural
 RoHS Compliant

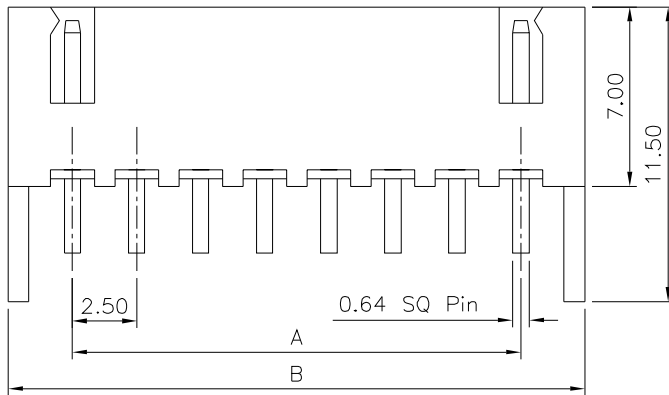




Recommended P.C.B. Layout

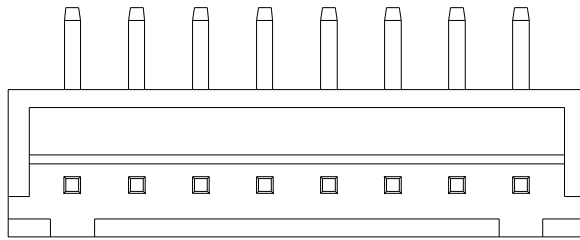

3~20 Pin

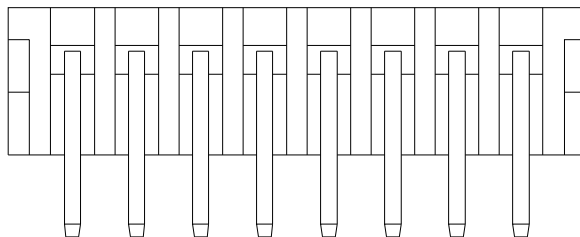

2

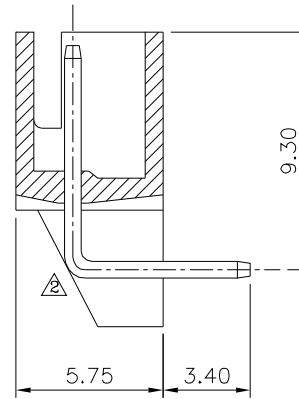

2 Pin

Pin	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50
20	47.50	52.50

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 3

01626

SCALE

NONE

REV.

A4

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.35
 .XX ±0.25

UNIT
 mm



A4

Modify Data

HZF

09/03/2019

A3

Modify Data

HZF

09/18/2018

A2

Modify Data

HZF

03/24/2010

A1

Modify Data

BECKY

2004/11/19

A0

NEW RELEASE

NO. REV.

REVISIONS

CHK

DATE