


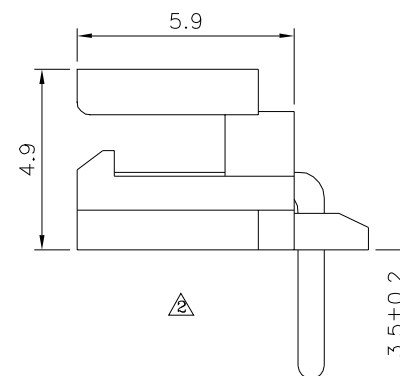


# SPECIFICATION

Current Rating:3A AC/DC  
Voltage Rating:250V AC/DC  
Withstand Voltage:1000V AC/Minute  
Insulation Resistance:1000 Megaohms Min.  
Contact:Brass,Tin Plated  
Base:PA66(UL94V-2)  
RoHS Compliant

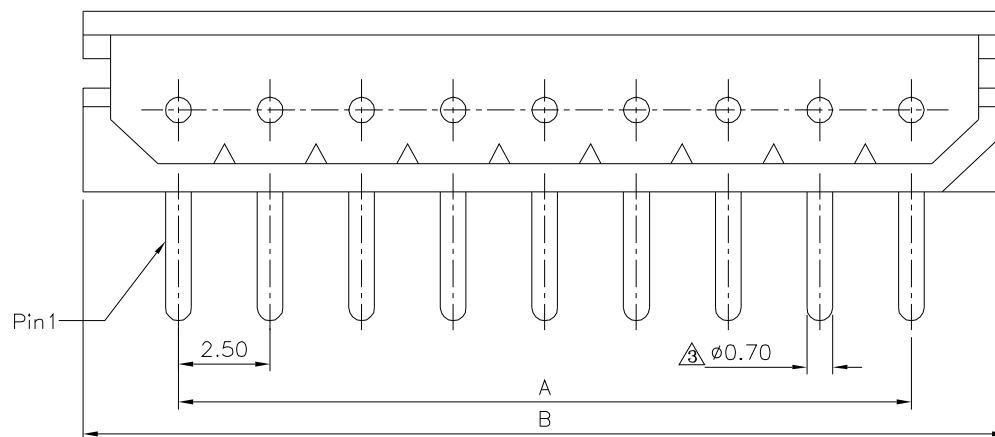

Recommended P.C.B. Layout

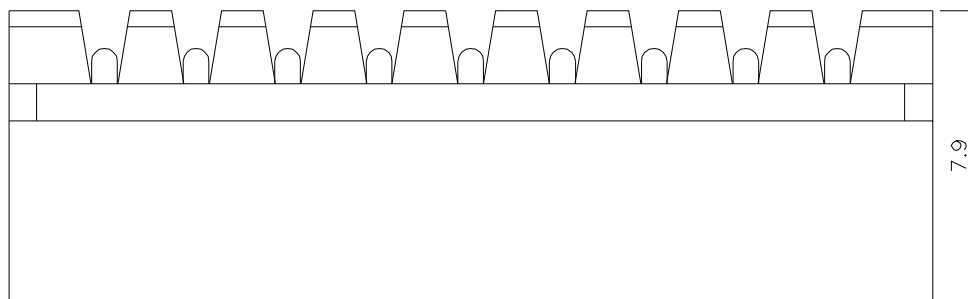

| Pin | A     | B     |
|-----|-------|-------|
| 2   | 2.50  | 7.50  |
| 3   | 5.00  | 10.00 |
| 4   | 7.50  | 12.50 |
| 5   | 10.00 | 15.00 |
| 6   | 12.50 | 17.50 |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No. 1

01690

SCALE NONE

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

REV. A4

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
.X ±0.50  
.XX ±0.25  
.XXX ±0.10  
ANG. ±2°

UNIT  
mm



| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| 1   | A4   | Modify Data | HZF | 07/26/2017 |
| 2   | A3   | Modify Data | HZF | 03/24/2017 |
| 3   | A2   | Modify Data | HZF | 02/05/2015 |
| 4   | A1   | Modify Data | HZF | 01/22/2015 |
| 5   | A0   | NEW RELEASE | HZF | 11/07/2009 |