

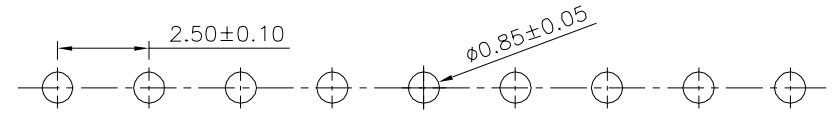
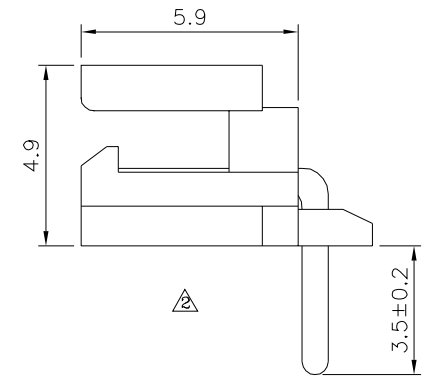


SPECIFICATION
 Current Rating:3A AC/DC
 Voltage Rating:250V AC/DC
 Withstand Voltage:1000V AC/Minute
 Insulation Resistance:1000 Megahms Min.
 Contact:Brass,Tin Plated
 Base:PA66(UL94V-2)
 RoHS Compliant

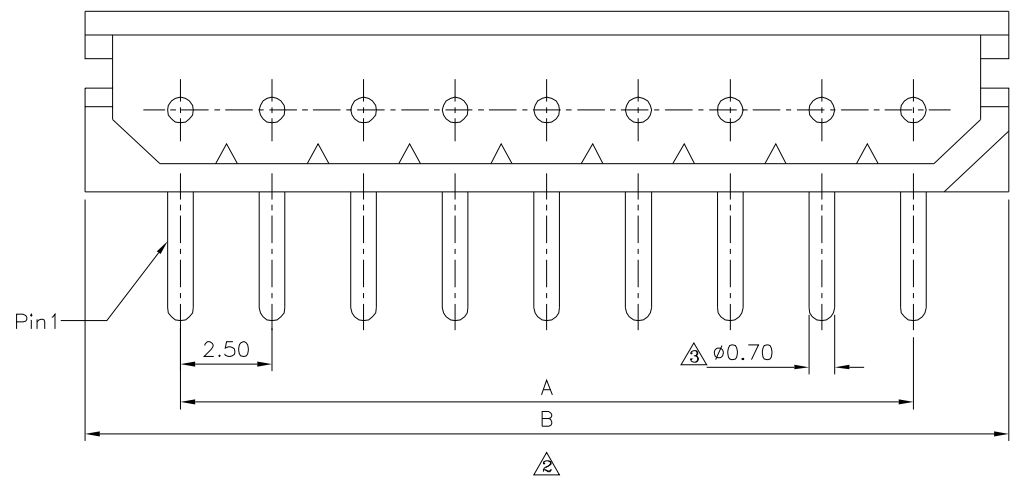

Recommended P.C.B. Layout

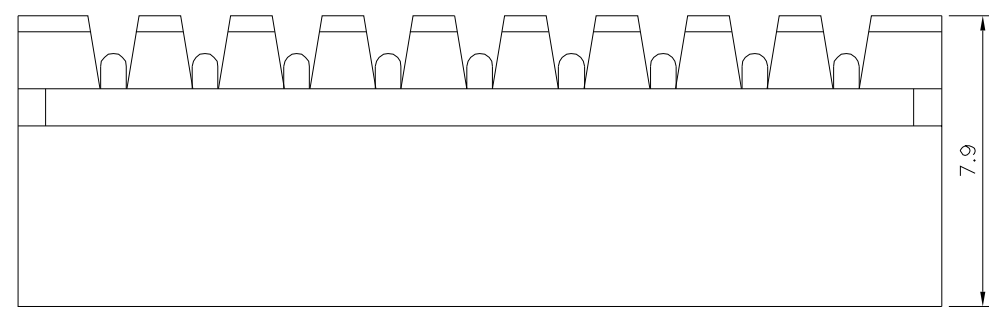

| Pin | A | B |
|-----|-------|-------|
| 2 | 2.50 | 7.50 |
| 3 | 5.00 | 10.00 |
| 4 | 7.50 | 12.50 |
| 5 | 10.00 | 15.00 |
| 6 | 12.50 | 17.50 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. Δ
01691

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.50
 .XX ±0.25
 .XXX ±0.10
 ANG. ±2°

| NO. | REV. | REVISIONS | CHK | DATE |
|----------|------|-------------|-----|------------|
| Δ | A4 | Modify Data | HZF | 07/26/2017 |
| Δ | A3 | Modify Data | HZF | 03/24/2017 |
| Δ | A2 | Modify Data | HZF | 02/05/2015 |
| Δ | A1 | Modify Data | HZF | 01/22/2015 |
| Δ | A0 | NEW RELEASE | HZF | 11/07/2009 |

SCALE NONE REV. A4

