
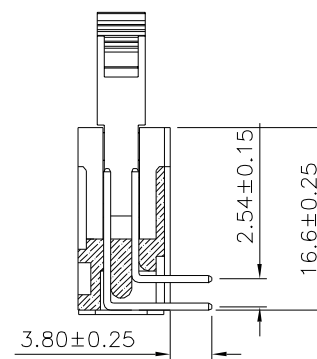
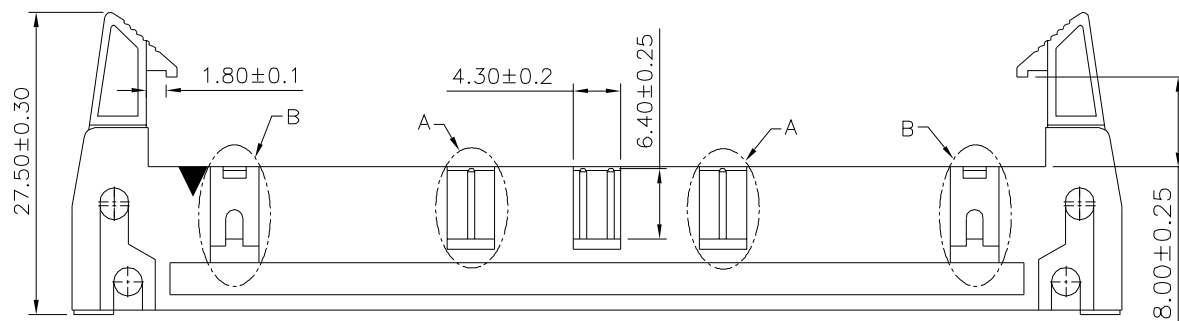
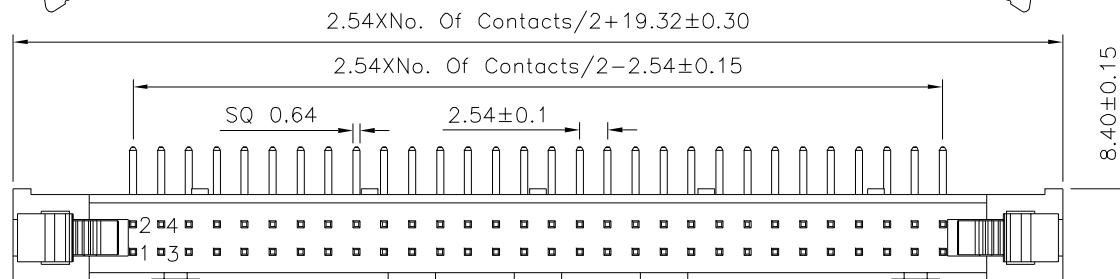
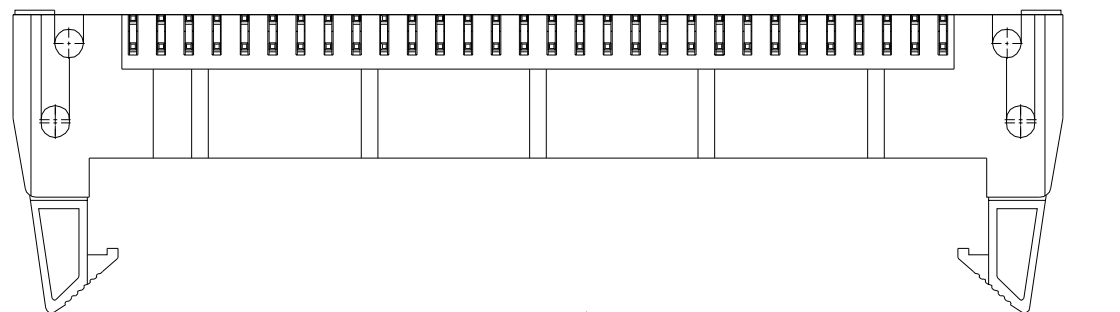


SPECIFICATION

Current Rating:3 Amps
 Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 Only 60P~64P With Slot "A"
 Less Than 18 Pin Without Slot "B"
 RoHS Compliant

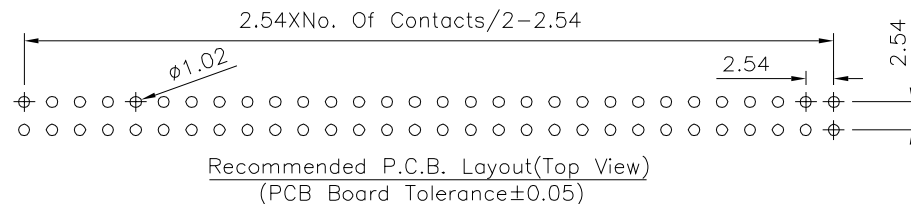

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

01815

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ± 0.25 X.* $\pm 2^*$
 .X ± 0.20 .X* $\pm 1.5^*$
 .XX ± 0.15 .XX* $\pm 1^*$
 .XXX ± 0.10 .XXX* $\pm 0.5^*$

UNIT
 mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

01/03/2016

DATE