




# SPECIFICATION

Current Rating:2.5A AC/DC  
Voltage Rating:250V AC/DC  
Withstand Voltage:800V AC/Minute  
Insulation Resistance:1000 Megaohms Min.  
Temperature Range:-25°C~+85°C  
Insulator:PBT(UL94V-0),Black  
RoHS Compliant



## Latch And Polarization RIB Location

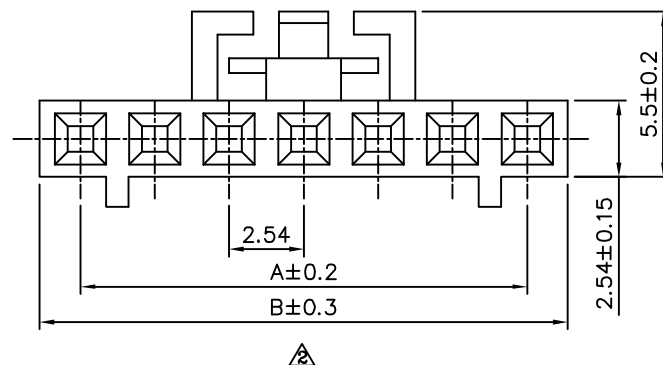

2 Circuit



3 Circuit

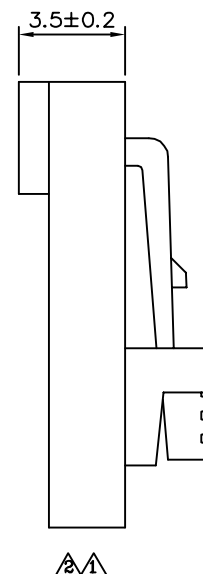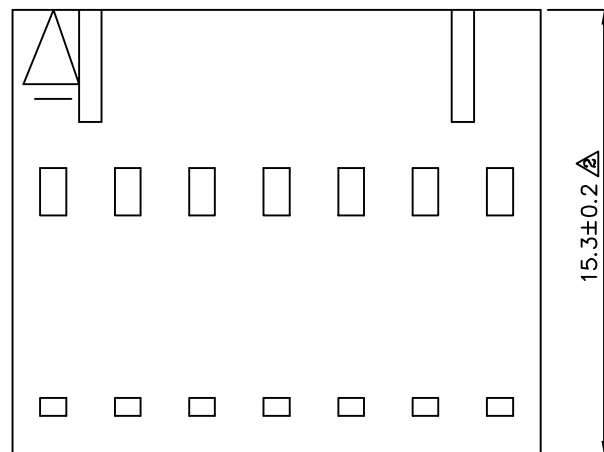

| Circuits | A     | B     |
|----------|-------|-------|
| 02       | 2.54  | 5.35  |
| 03       | 5.08  | 7.89  |
| 04       | 7.62  | 10.43 |
| 05       | 10.16 | 12.97 |
| 06       | 12.70 | 15.51 |
| 07       | 15.24 | 18.05 |
| 08       | 17.78 | 20.59 |
| 09       | 20.32 | 23.13 |
| 10       | 22.86 | 25.67 |
| 11       | 25.40 | 28.21 |
| 12       | 27.94 | 30.75 |
| 13       | 30.48 | 33.29 |
| 14       | 33.02 | 35.83 |
| 15       | 35.54 | 38.37 |
| 16       | 38.10 | 40.91 |
| 17       | 40.64 | 43.45 |
| 18       | 43.18 | 45.99 |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

02000

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

B2

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

$\Delta$  X  $\pm 0.5$   
 $\Delta$  Y  $\pm 0.25$   
 $\Delta$  Z  $\pm 0.2$   
 $\Delta$  XXX  $\pm 0.08$

UNIT  
mm



| NO. | REV. | REVISIONS   | CHK   | DATE       |
|-----|------|-------------|-------|------------|
| B2  |      | Modify Data | HZF   | 09/23/2016 |
| B1  |      | Modify Data | HZF   | 03/03/2010 |
| B0  |      | NEW RELEASE | BECKY | 06/07/2006 |