
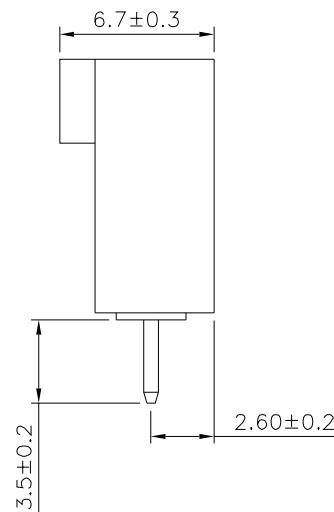


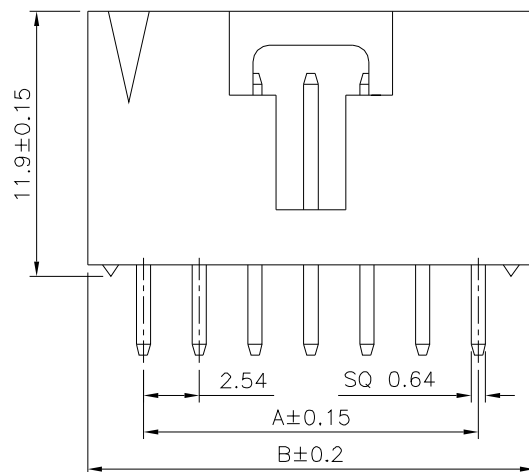


Recommended P.C.B. Layout  
Thickness=1.6mm

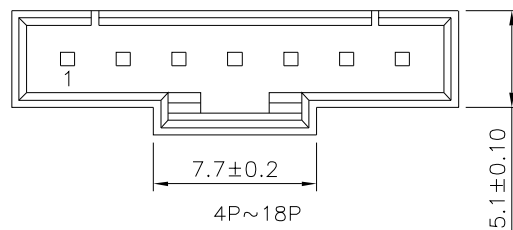

# SPECIFICATION

Current Rating:2.5A AC/DC  
Voltage Rating:250V AC/DC  
Insulation Resistance:1000 Megaohms Min.  
Withstand Voltage:600V AC/Minute  
Temperature Range:-25°C~+85°C  
Insulator:PBT(UL94V-0),Black  
Contact:Brass,Gold Flash Over All,Over Nickel  
RoHS Compliant

| Pin | A     | B     | Pin | A     | B     |
|-----|-------|-------|-----|-------|-------|
| 02  | 2.54  | 7.62  | 11  | 25.40 | 30.48 |
| 03  | 5.08  | 10.16 | 12  | 27.94 | 33.02 |
| 04  | 7.62  | 12.70 | 13  | 30.48 | 35.56 |
| 05  | 10.16 | 15.24 | 14  | 33.02 | 38.10 |
| 06  | 12.70 | 17.78 | 15  | 35.56 | 40.64 |
| 07  | 15.24 | 20.32 | 16  | 38.10 | 43.18 |
| 08  | 17.78 | 22.86 | 17  | 40.64 | 45.72 |
| 09  | 20.32 | 25.40 | 18  | 43.18 | 48.26 |
| 10  | 22.86 | 27.94 |     |       |       |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

02010

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

CO

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
X. ±0.5  
.X ±0.25  
.XX ±0.2  
.XXX ±0.08

UNIT  
mm



NO. REV.

NEW RELEASE

REVISIONS

HZF

CHK

10/25/2017

DATE