
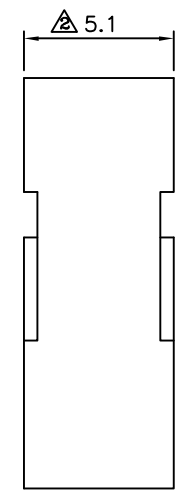


**△ SPECIFICATION**  
 Current Rating:3A AC/DC  
 Voltage Rating:250V AC/DC  
 Temperature Range:-25°C~+85°C  
 Insulation Resistance:1000 Megaohms Min.  
 Withstand Voltage:800V AC/Minute  
**△ Material:**Noryl(UL94V-1),Black  
 RoHS Compliant

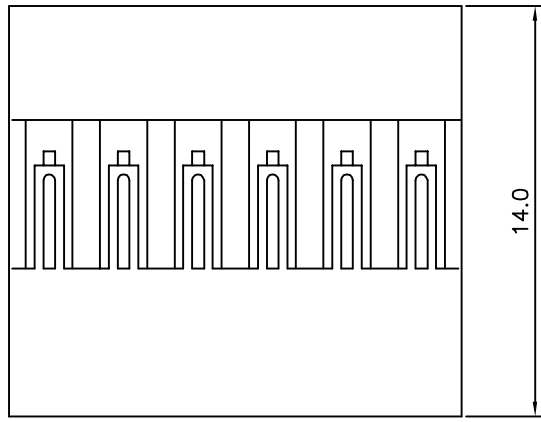

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE $\Delta$ .X ±0.38 .XX ±0.25
02072		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		QQJ		
SCALE	NONE	REV.	A3	

NO.	REV.	REVISIONS	CHK	DATE
△ A3		Modify Data	HZF	09/06/2010
△ A2		Modify Data	HZF	02/26/2010
△ A1		Modify Material	INGRID	09/27/2007
△ A0		NEW RELEASE		