



△ SPECIFICATION
 Current Rating:3A AC/DC
 Voltage Rating:250V AC/DC
 Temperature Range:-25°C~+85°C
 Insulation Resistance:1000 Megaohms Min.
 Withstand Voltage:800V AC/Minute
 \triangle Material:Noryl(UL94V-1),Black
 RoHS Compliant

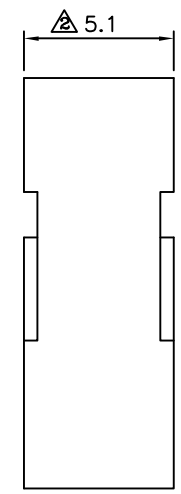

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | | | | | |
|-------------|--|-------------|------|--|----------------|-----------------|--------|------------|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE \triangle .X \pm 0.38 .XX \pm 0.25 | | | | |
| 02086 | | MEI | | | \triangle A3 | Modify Data | HZF | 09/06/2010 |
| | | CHECKED BY | | | \triangle A2 | Modify Data | HZF | 02/26/2010 |
| | | DRAWING BY | | | \triangle A1 | Modify Material | INGRID | 09/27/2007 |
| SCALE | | NONE | REV. | A3 | \triangle A0 | NEW RELEASE | | |
| | | | | | NO.REV. | REVISIONS | CHK | DATE |

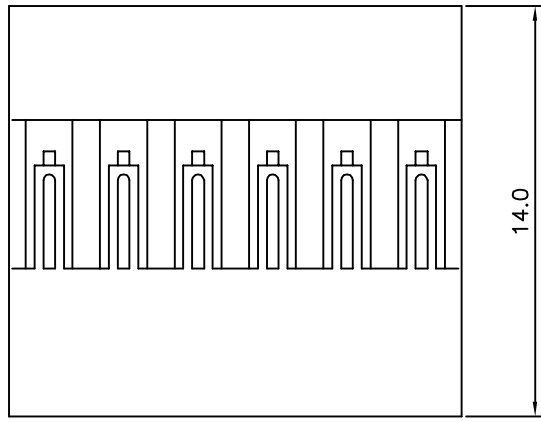