


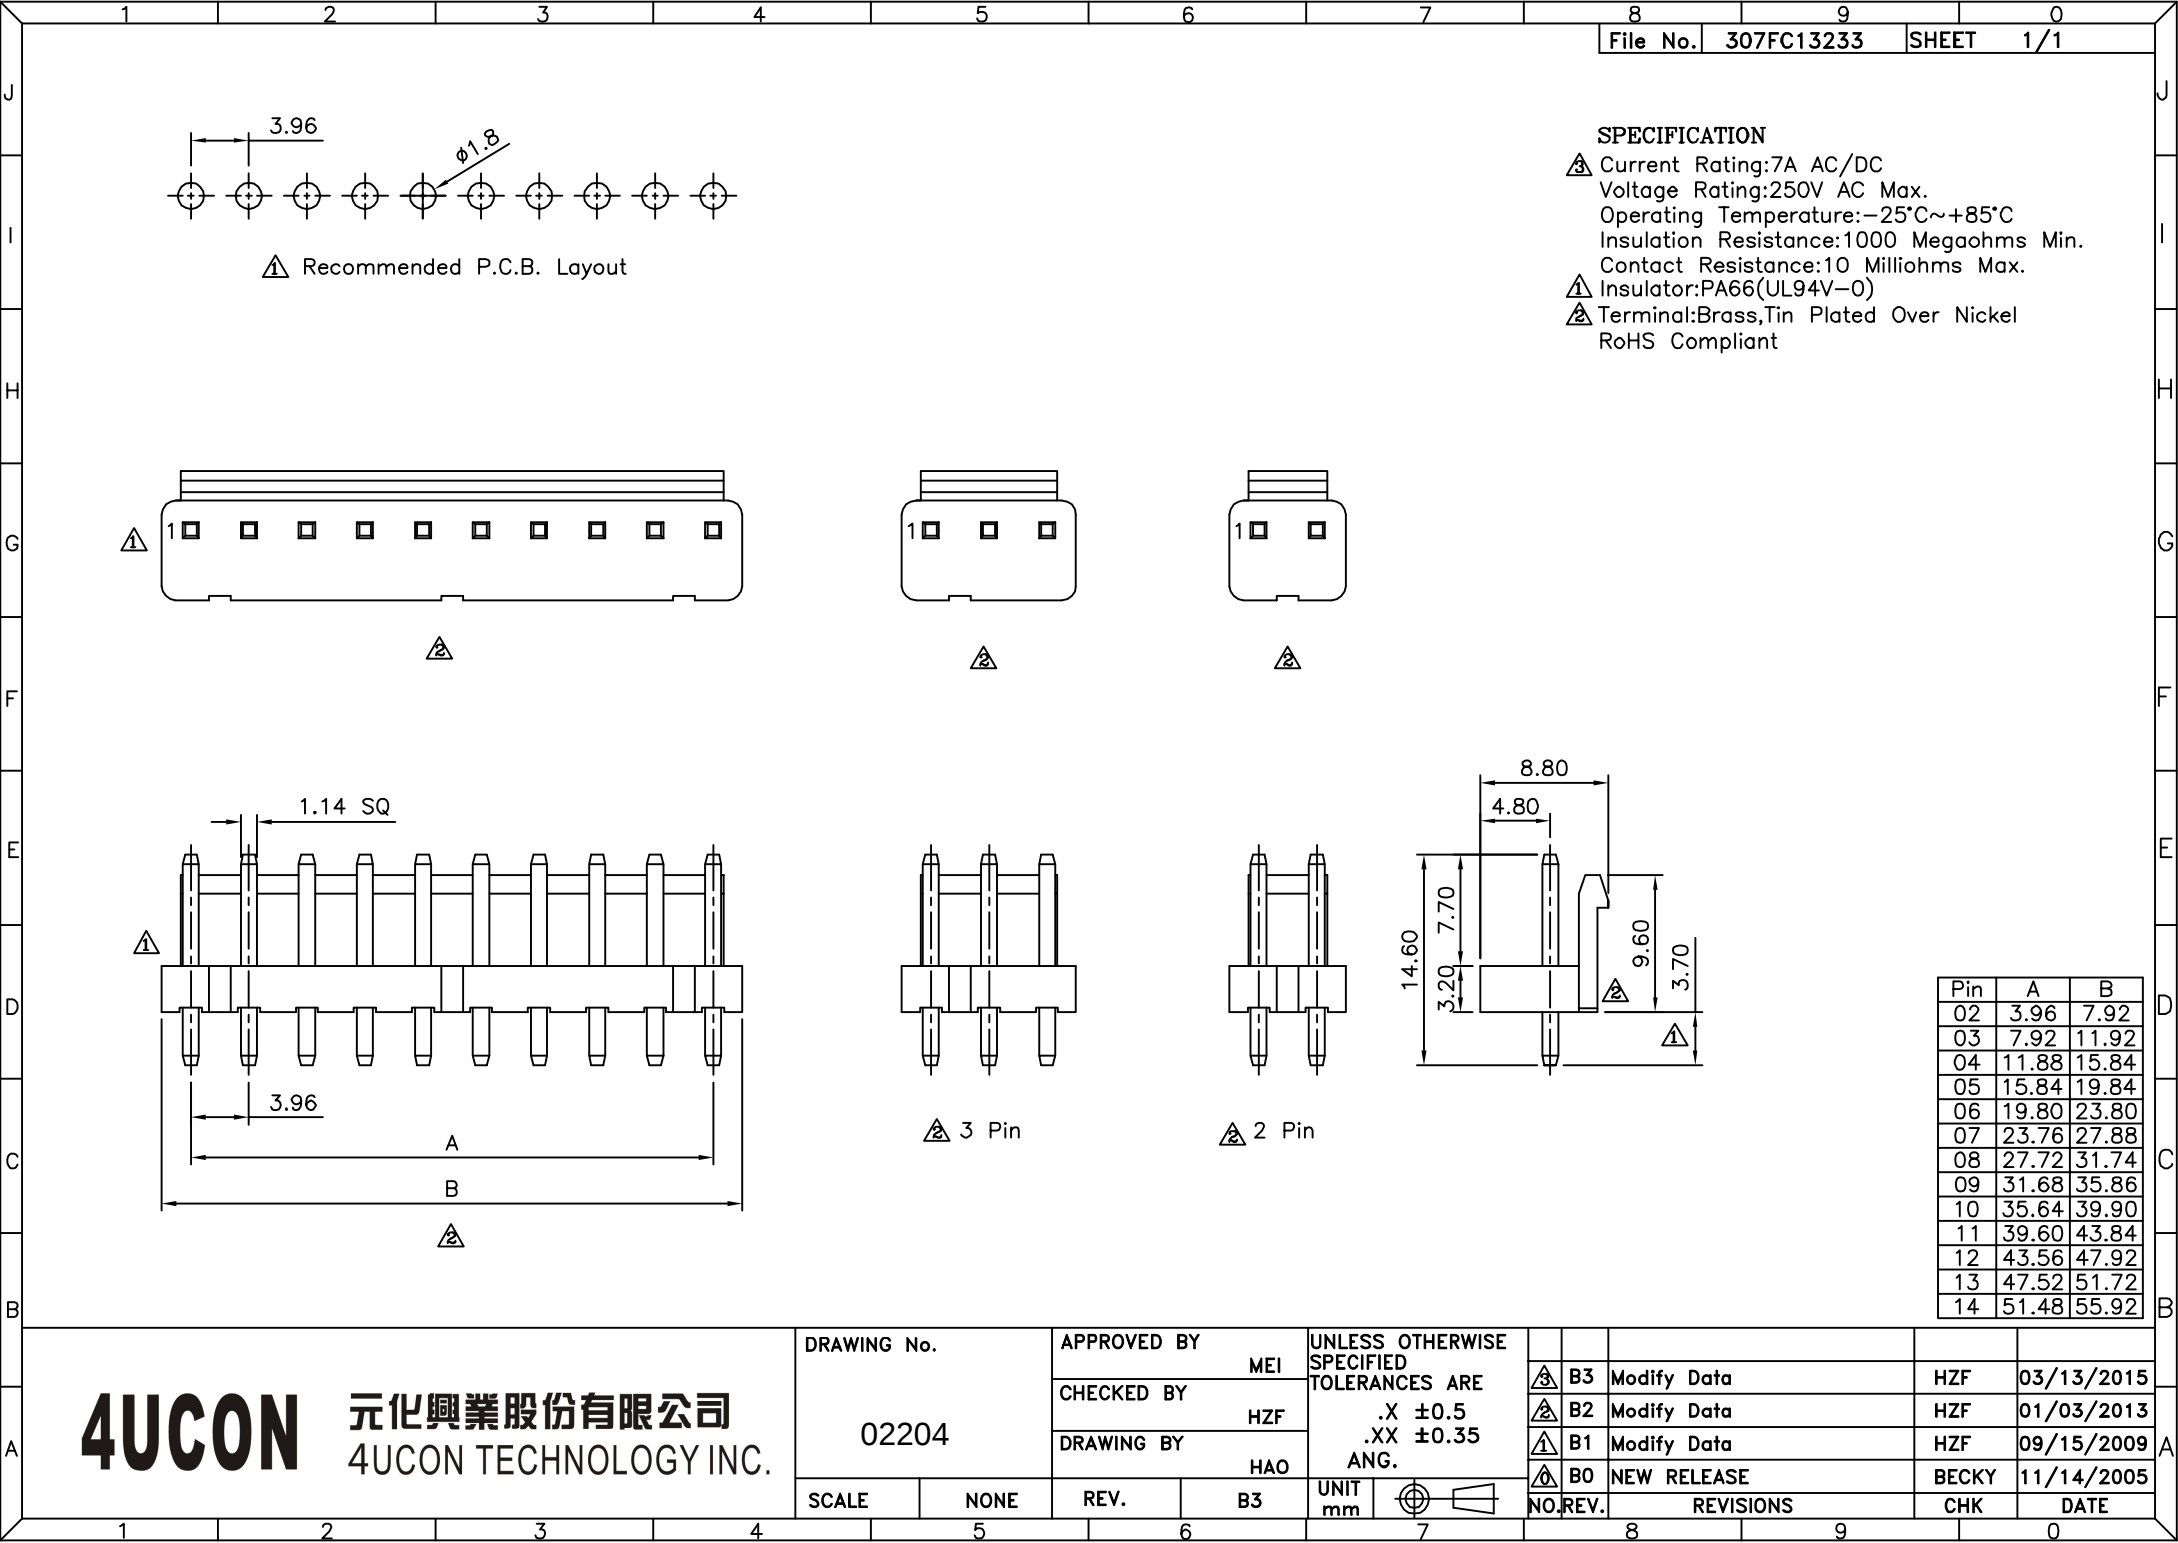

SPECIFICATION

- Current Rating:7A AC/DC
- Voltage Rating:250V AC Max.
- Operating Temperature:-25°C~+85°C
- Insulation Resistance:1000 Megaohms Min.
- Contact Resistance:10 Milliohms Max.
- Insulator:PA66(UL94V-0)
- Terminal:Brass,Tin Plated Over Nickel
- RoHS Compliant

Pin	A	B
02	3.96	7.92
03	7.92	11.92
04	11.88	15.84
05	15.84	19.84
06	19.80	23.80
07	23.76	27.88
08	27.72	31.74
09	31.68	35.86
10	35.64	39.90
11	39.60	43.84
12	43.56	47.92
13	47.52	51.72
14	51.48	55.92

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 02204		APPROVED BY MEI	
		CHECKED BY HZF	
		DRAWING BY HAO	
SCALE	NONE	REV.	B3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ± 0.5 .XX ± 0.35 ANG.	
UNIT	mm

NO.	REV.	REVISIONS	CHK	DATE
B3		Modify Data	HZF	03/13/2015
B2		Modify Data	HZF	01/03/2013
B1		Modify Data	HZF	09/15/2009
B0		NEW RELEASE	BECKY	11/14/2005