

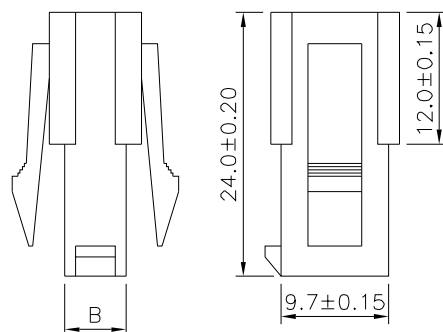
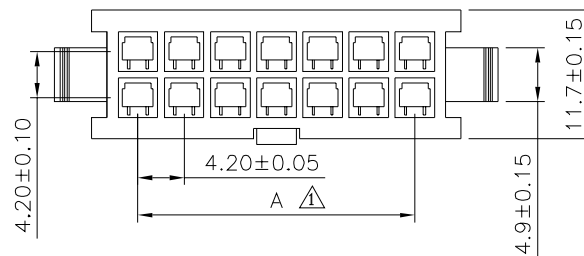


△ SPECIFICATION
 Current Rating:8A AC/DC
 Voltage Rating:500V AC/DC
 Withstand Voltage:1500V AC/Minute
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+105°C
 Insulator:PA66
 RoHS Compliant



△ 2 Pin

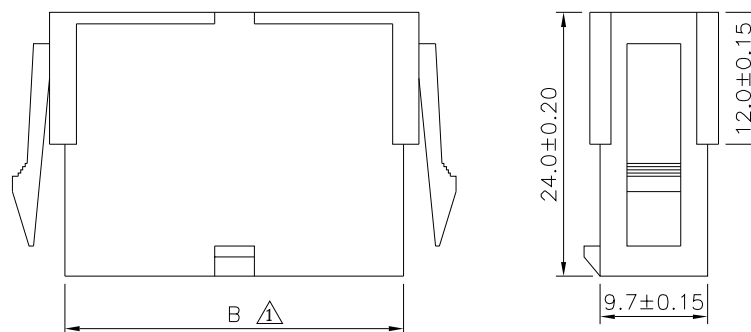

4~24 Pin

Pin	A	B
02	—	5.6
04	4.20	9.8
06	8.40	14.0
08	12.60	18.2
10	16.80	22.4
12	21.00	26.6
14	25.20	30.8
16	29.40	35.0
18	33.60	39.2
20	37.80	43.4
22	42.00	47.6
24	46.20	51.8

PS. Flame Retardant & Insulator Color:
 UL94V-2 Nature Color
 UL94V-0 White Color
 UL94V-2 Black Color

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.△

02238

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.5
 .X ±0.25
 .XX ±0.2
 .XXX ±0.08

SCALE NONE

REV. A1

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	12/27/2018
△ A0		NEW RELEASE	HZF	01/12/2010