
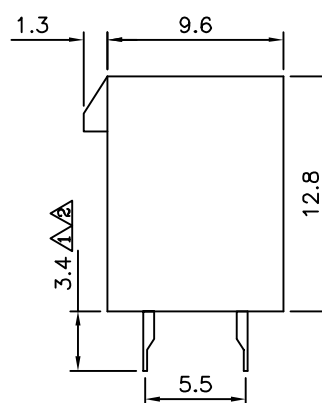
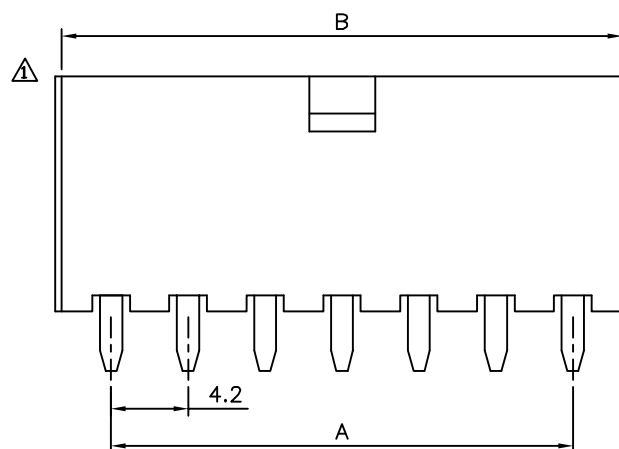
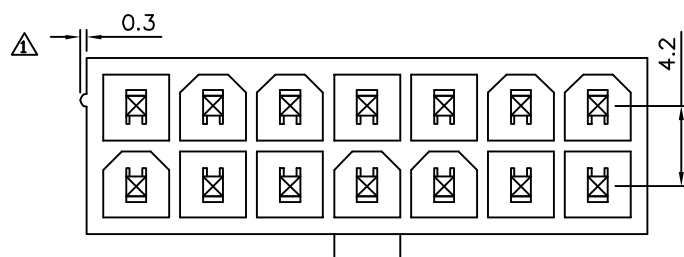


△ SPECIFICATION

Current Rating:7A AC/DC
 Voltage Rating:250V AC/DC
 Withstand Voltage:1500V AC/Minute
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+85°C
 Insulator:PA66(UL94V-2)
 △ Contact:Brass,Tin Plated Over Nickel
 RoHS Compliant

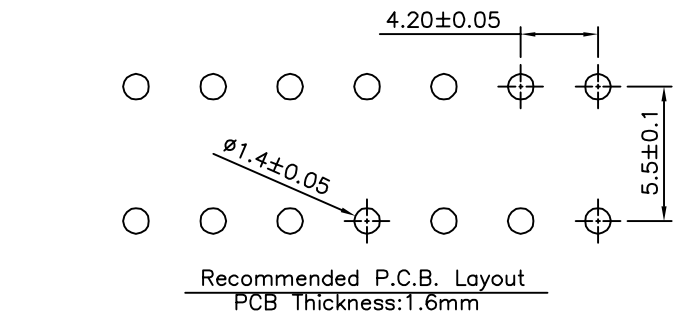

△

Pin	A	B
02	—	5.2
04	4.20	9.4
06	8.40	13.6
08	12.60	17.8
10	16.80	22.0
12	21.00	26.2
14	25.20	30.4
16	29.40	34.6
18	33.60	38.8
20	37.80	43.0
22	42.00	47.2
24	46.20	51.4

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

02256

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


GAO

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG.

UNIT
 mm



NO.

REV.

A2

NO.

REV.

Modify Data

Modify Data

NEW RELEASE

REVISIONS

CHK

DATE

08/02/2013

10/20/2009